SAMSUNG

COLOR TELEVISION RECEIVER

Chassis : KS3A(P)_50Hz(REV. 5)
Model : CW29A8VDE8XXEC
CW29A8VDESXXEC
WS28V63NS8XXEC
WS28V65VS8XXEC
WS32V64NS8XXEC
WS32V66VS8XXEC

SERVICE Manual

COLOR TELEVISION RECEIVER

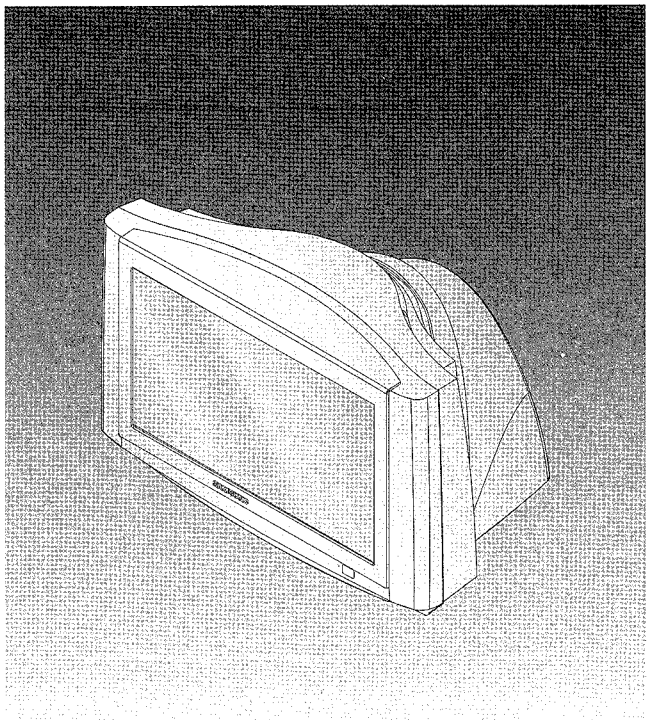

CONTENTS

1. Precautions
2. Reference Information
3. Specifications
4. Alignment and Adjustments
5. Troubleshooting
6. Exploded Views and Parts List
7. Electrical Parts List
8. Block Diagrams
9. Wiring Diagram
10. Schematic Diagrams

1. Precautions

Follow these safety, servicing and ESD precautions to prevent damage and protect against potential hazards such as electrical shock and X-rays.

1-1 Safety Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.

2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including: nonmetallic control knobs and compartment covers.

3. Make sure that there are no cabinet openings through which people—particularly children—might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

   If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (Figure 1-1):
   Warning: Do not use an isolation transformer during this test. Use a leakage-current tester or a metering system that complies with American National Standards Institute (ANIS C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).

5. With the unit completely reassembled, plug the AC line cord directly into the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

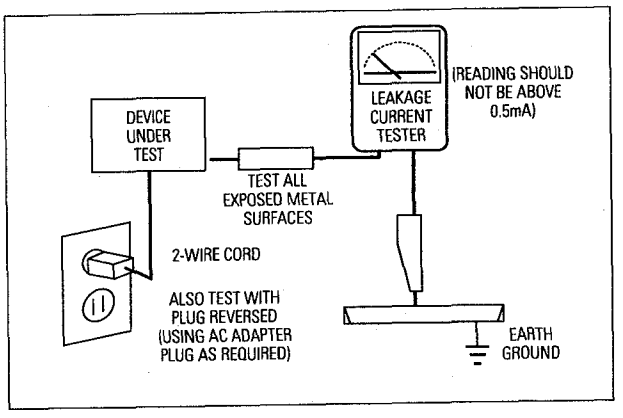
LEAKAGE CURRENT TESTER
(READING SHOULD NOT BE ABOVE 0.5mA)
DEVICE UNDER TEST
TEST ALL EXPOSED METAL SURFACES
2-WIRE CORD
ALSO TEST WITH PLUG REVERSED (USING AC ADAPTER PLUG AS REQUIRED)
EARTH GROUND

Fig. 1-1 AC Leakage Test

6. Antenna Cold Check:
   With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.

7. X-ray Limits:
   The picture tube is especially designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original. Carefully reinstall the picture tube shields and mounting hardware; these also provide X-ray protection.

8. High Voltage Limits:
   High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits.
   Correct operation of the X-ray protection circuits must be reconfirmed whenever they are serviced.
   (X-ray protection circuits also may be called "horizontal disable" or "hold-down".)

   Heed the high voltage limits. These include the X-ray Protection Specifications Label, and the Product Safety and X-ray Warning Note on the service data schematic.

1-1 Safety Precautions (Continued)

9. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.

10. Design Alteration Warning:
Never alter or add to the mechanical or electrical design of this unit. Example: Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.

11. Hot Chassis Warning:
Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.

    To confirm that the AC power plug is inserted correctly, do the following: Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.

12. Some TV chassis are designed to operate with 85 volts AC between chassis and ground, regardless of the AC plug polarity. These units can be safely serviced only if an isolation transformer inserted between the receiver and the power source.

13. Some TV chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.

14. Components, parts and wiring that appear to have overheated or that are otherwise damaged should be replaced with parts that meet the original specifications. Always determine the cause of damage or overheating, and correct any potential hazards.

15. Observe the original lead dress, especially near the following areas: Antenna wiring, sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.

16. Picture Tube Implosion Warning:
The picture tube in this receiver employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.

17. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.

18. Product Safety Notice:
Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.

    Components that are critical for safety are indicated in the circuit diagram by shading, (⚠) or (⚠).
    Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications.
    A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.

1-2 Servicing Precautions

Warning1: First read the "Safety Precautions" section of this manual. If some unforeseen circumstance creates a conflict between the servicing and safety precautions, always follow the safety precautions.
Warning2: An electrolytic capacitor installed with the wrong polarity might explode.

1. Servicing precautions are printed on the cabinet. Follow them.

2. Always unplug the unit's AC power cord from the AC power source before attempting to: (a) Remove or reinstall any component or assembly, (b) Disconnect an electrical plug or connector, (c) Connect a test component in parallel with an electrolytic capacitor.

3. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.

4. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the portion around the serviced part has not been damaged.

5. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).

6. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500V) to the blades of the AC plug.

   The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.

7. Never defeat any of the B+ voltage interlocks. Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.

8. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

1-3 Precautions for Electrostatically Sensitive Devices (ESDs)

1. Some semiconductor ("solid state") devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.

2. Immediately before handling any semicon ductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. (Be sure to remove it prior to applying power—this is an electric shock precaution.)

3. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of electrostatic charge.

4. Do not use freon-propelled chemicals. These can generate electrical charges that damage ESDs.

5. Use only a grounded-tip soldering iron when soldering or unsoldering ESDs.

6. Use only an anti-static solder removal device. Many solder removal devices are not rated as "anti-static"; these can accumulate sufficient electrical charge to damage ESDs.

7. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.

8. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.

9. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting a foot from a carpeted floor can generate enough static electricity to damage an ESD.

2. Reference Information

2-1 Tables of Abbreviations and Acronyms

Table 2-1 Abbreviations

A	Ampere	MV	Megavolt
Ah	Ampere-hour	MW	Megawatt
Å	Angstrom	MΩ	Megohm
dB	Decibel	m	Meter
dBm	Decibel Referenced to One Milliwatt	µA	Microampere
		µF	Microfarad
°C	Degree Celsius	µH	Microhenry
°F	Degree Fahrenheit	µm	Micrometer
°K	degree Kelvin	µs	Microsecond
F	Farad	µW	Microwatt
G	Gauss	mA	Milliampere
GHz	Gigahertz	mg	Milligram
g	Gram	mH	Millihenry
H	Henry	ml	Milliliter
Hz	Hertz	mm	Millimeter
h	Hour	ms	Millisecond
ips	Inches Per Second	mV	Millivolt
kWh	Kilowatt-hour	nF	Nanofarad
kg	Kilogram	Ω	Ohm
kHz	Kilohertz	pF	Picofarad
kΩ	Kilohm	lb	Pound
km	Kilometer	rpm	Revolutions Per Minute
km/h	Kilometer Per Hour	rps	Revolutions Per Second
kV	Kilovolt	s	Second (Time)
kVA	Kilovolt-ampere	V	Volt
kW	Kilowatt	VA	Volt-ampere
l	Liter	W	Watt
MHz	Megahertz	Wh	Watt-hour

Table 2-2 Table of Acronyms

ABL	Automatic Brightness Limiter
AC	Alternating Current
ACC	Automatic Chroma Control
AF	Audio Frequency
AFC	Automatic Frequency Control
AFT	Automatic Fine Tuning
AGC	Automatic Gain Control
AM	Amplitude Modulation
ANSI	American National Standards Institute
APC	Automatic Phase Control
APC	Automatic Picture Control
A/V	Audio-Video
AVC	Automatic Volume Control
BAL	Balance
BPF	Bandpass Filter
B-Y	Blue-Y
CATV	Community Antenna Television (Cable TV)
CB	Citizens Band
CCD	Charge Coupled Device
CCTV	Closed Circuit Television
Ch	Channel
CRT	Cathode Ray Tube
CW	Continuous Wave
DC	Direct Current
DVM	Digital Volt Meter
EIA	Electronics Industries Association
ESD	Electrostatic Discharge
ESD	Electrostatically Sensitive Device
FBP	Feedback Pulse
FBT	Flyback Transformer
FF	Flip-Flop
FM	Frequency Modulation
FS	Fail Safe
GND	Ground
G-Y	Green-Y
H	High
HF	High-Frequency
HI-FI	High Fidelity
IC	Inductance-Capacitance
IC	Integrated Circuit
IF	Intermediate Frequency
I/O	Input/output
L	Left
L	Low
LED	Light Emitting Diode
LF	Low Frequency
MOSFET	Metal-Oxide-Semiconductor-Field-Effect-Tr
MTS	Multi-channel Television Sound
NAB	National Association of Broadcasters
NEC	National Electric Code
NTSC	National Television Systems Committee
OSD	On Screen Display
PCB	Printed Circuit Board
PLL	Phase-Locked Loop
PWM	Pulse Width Modulation
QIF	Quadrature Intermediate Frequency
R	Right
RC	Resistor & Capacitor
RF	Radio Frequency
R-Y	Red-Y
SAP	Second Audio Program
SAW	Surface Acoustic Wave(Filter)
SIF	Sound Intermediate Frequency
SMPS	Switching Mode Power Supply
S/N	Signal/Noise
SW	Switch
TP	Test Point
TTL	Transistor Transistor Logic
TV	Television
UHF	Ultra High Frequency
UL	Underwriters Laboratories
UV	Ultraviolet
VCD	Variable-Capacitance Diode
VCO	Voltage Controlled Oscillator
VCXO	Voltage Controlled Crystal Oscillator
VHF	Very High Frequency
VIF	Video Intermediate Frequency
VR	Variable Resistor
VTR	Video Tape Recorder
VTVM	Vacuum Tube Voltmeter
TR	Transistor

2-2 IC Line Up

Table 2 - 3 IC Line - Up					
NO	**BOARD**	**LOC. NO**	**SPEC**	**DESCRIPTION**	**REMARK**
1	MAIN	IC201S	VDP3130Y	Video Processor	Refer to Table 2-3-1
		IC601	MSP3411G	Multistandard Sound Processor	Refer to Table 2-3-2
		IC901	SDA555X	MICOM, TTX(MTP)	
		IC902	KS24L161	EEPROM	
		IC602	TDA7297	Audio AMP	Refer to Table 2-3-3
		HIC201	DRGB001	RGB Drive AMP Hybrid IC	VM Option
		HIC202			
		HIC203			
		HIC204			
		IC301	LA7845	Vertical IC	
		Q402	KSC2073-H2	Horizontal Drive IC	HC401
		Q401	KSD5703		
		D414	FMP-3FU		
		IC401	KA393	E/W Drive IC	
		Q404	IRF620		
		IC801S	3S1265RB 3S1265RD	SPS Controllor	
		D801S	RBV606	Bridge Diode	
		PC801S	PC123Y	Photo Coupler	
		IC802	KA78R05	5V Controlled Regulator	
		D805	FML-G12S	Rectifier Diode	HC801
		D806			
		D807			
		D802	FMG-G2CS		
		IC201	KA78RM33	3.3V Regulator	
		IC804	KA7806	6V Regulator	
		IC803	KA78R08	8V Controlled Regulator	
		IC903	KA78RM33	3.3V Regulator	
		IC904	KIA7025AP	MICOM Reset IC	
		Q909	2N700	IIC Level Shifter	
		Q910			

Table 2 - 3 IC Line - Up					
NO	**BOARD**	**LOC. NO**	**SPEC**	**DESCRIPTION**	**REMARK**
		TU01S	TCL3101PD09A9(S)		Refer to Table 2-3-4
		TU02S	TCL3101PD09A9(S)		Refer to Table 2-3-5
2	**CRT**	IC501	TDA5109 TDA6101Q	Video Output AMP R.G.B Drive	FLAT
		IC502			FLAT
		IC503			FLAT
		QF04	2SC2344	Push-Pull (VM)	
		QF05	2SA1011		
		QG02	KSA940	TR-Power (TILT)	Option
		QG03	KSD2073-H2		
		ICG01	KA4558	OP-AMP (TILT)	
3	**DOUBLE FOCUS**	ICH01	KA4558	OP-AMP	Option
		QH01	2SC4636RB	TR-Power	
4	**V-S/W**	ICS01	TEA6425	Video Switching IC with Adder Output	Option
5	**PIP**	ICP01	SDA9489X	High-end Picture-In Picture IC	Option
			SDA9489	1-TUNER PIP	Option
		ICP02	EZ1086CM	3.3V Regulator	Option
6	**WOOFER**	ICW801	STRG9656	SMPS Controller	
		ICW601	TDA7265	Audio Amp	
		DW808	FES8GT	Rectifiter Diode	

Table 2-3-1 VIDEO IC (IC201S)

SPEC	FUNCTION	REMARK
VDP3108B	50Hz Basic	
VDP3112B	50Hz, 2H Comb Filter	
VDP3120B	50Hz, 2H Comb Filter, Horizontal Scaler	
VDP3130Y	50Hz, 2H Comb Filter, DVD Input	

Table 2-3-2 SOUND IC (IC601)

SPEC	FUNCTION	REMARK
MSP3400D	Multistandard, A2 Stereo	
MSP3410D	Multistandard, A2 Stereo, Nicam	
MSP3411G	Multistandard, A2 Stereo, Nicam, Vitual Dolby	
MSP3400G	Multistandard, A2 Stereo, Woofer Sound Level 12dB	

Table 2-3-3 SOUND AMP (IC602)

SPEC	FUNCTION	REMARK
TDA7297	15W x 2CH, 10W x 2CH	

Table 2-3-4 1'st TUNER (TU01S)

SPEC	FUNCTION	REMARK
TCLS3101PD09A(S)	CS with LNA Function	Main(Old)
TCPS3000P	CS	
TCPS3001PD09E(S)	CS	India
TCPW3001PD09A(S)	CZ, CW	
TCL3101PD16A	CS	Main(New)

Note **TCPS3001PD09A(S) is out-of-date, TCPS3001PD09D(S) which is up-to-date has the same function.**

Table 2-3-5 2'nd TUNER (TU02S)

SPEC	FUNCTION	REMARK
TCPS3000PC09B(S)	CS	Sub(Old()
TCPS3000PC16B	CS	Sub(New)

MEMO

3. Specifications

Television System	CS	PAL/SECAM-B/G/D/K,L,I, NTSD-M	
Antena Input	-	75ohms, Coaxial Cable	
Power	Consumption	130W(Applied When 29" Flat)	
	Requirements	220V Only	
		Free Voltage	Not Present R815
	Frequency	50/60Hz	
Sound	Output	15W x 2CH	29Inch
		10W x 2CH	21Inch
		5W x 2CH	
		30W x 2CH	29Inch Normal woofer
		20W x 2CH	21Inch Flat woofer
	Effect	Virtual Dolby	Option
		Trubo Sound	
		Pseudo Stereo	
		Woofer Sound	
Jacks	Front(AV2)	RCA Input	
		S-VHS	Option
	BACK	Head-Phone	
		RCA99(AV2 Input/Out)	
		2Scart Input/OUtput	AV1: Scart I/O, RGB Input, RF Out AV2: Scart I/O, Monitor Out
		DVD Input(YPbPr)	Option
		AV2 Monitro Audio Output	Option
		S-VHS	Option
		Woofer Output	2CH

Specifications for Model Name (Ex. CS29A6??8X/HAC)

Specifications for Model Name (Ex. CS29A6??8X/HAC)

	Function	NOTE
N	NICAM	"NICAM" means that A2 STEREO + NICAM
P	2 TUNER PIP	
PF	2 TUNER PIP, NICAM, TTX	
PT	2 TUNER PIP, A2 STEREO, TTX	
PW	2 TUNER PIP, A2 STEREO	
MT	2 TUNER MULTI PIP, A2 STEREO,	
NT	NICAM, TTX	
WT	A2 STEREO, TTX	
GW	1 TUNER PIP, A2 STEREO, TTX	

MEMO

4. Alignment and Adjustments

4-1 General Alignment Instructions

1. Usually, a color TV-VCR needs only slight touch-up adjustment upon installation. Check the basic characteristics such as height, horizontal and vertical sync and focus.
2. Observe the picture for good black and white details. There should be objectionable color shading; if color shading is present, demagnetize, perform purity and convergence adjustments described below.
3. Use the specified test equipment or its equivalent.
4. Correct impedance matching is essential.
5. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test results.
6. Connect the TV only to an AC power source with voltage and frequency as specified on the backcover nameplate.
7. Do not attempt to connect or disconnect any wires while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.
8. To protect against shock hazard, use an isolation transformer.

4-2 Automatic Degaussing

A degaussing coil is mounted around the picture tube, so that external degaussing after moving the TV should be unnecessary. But the receiver must be properly degaussed upon installation.

The degaussing coil operates for about 1 second after the power is switched ON. If the set is moved or turned in a different direction, the power should be OFF for at least 10 minutes.

If the chassis or parts of the cabinet become magnetized, poor color purity will result. If this happens, use an external degaussing coil. Slowly move the degaussing coil around the faceplate of the picture tube and the sides and front of the receiver. Slowly withdraw the coil to a distance of about 6 feet before turning power OFF.

If color shading persists, perform the following Color purity and Convergence adjustments.

4-3 High voltage Check

CAUTION : There is no high voltage adjustment on this chassis. The B+ power supply should be +135 volts (with full color- bar input and normal picture level).

1. Connect a digital voltmeter to the second anode of the picture tube.
2. Turn on the TV. Set the Brightness and Contrast controls to minimum (zero beam current).
3. Adjust the Brightness and contrast controls to both extremes. Ensure that the high voltage does not exceed 32 KV under any conditions.

4-4 Dynamic Focus Adjustment

1. A dynamic focus adjustment should be done after replacing the CRT PCB, FBT or CRT.
2. Input a crosshatch pattern.
3. Enter " STANDARD " in video mode.
4. Turn the Dynamic focus VR fully clockwise (maximum).(❶)
5. Turn the Static focus VR fully counterclockwise (maximum).(❷)
6. Slowly turn the static focus VR counterclockwise. Adjust until the vertical line in the middle of the screen has maximum clarity.(❶)
7. Slowly turn the dynamic focus VR (clockwise) and adjust the 3rd horizontal line for maximum clarity.(❷)
8. Repeat 4-7, if necessary.

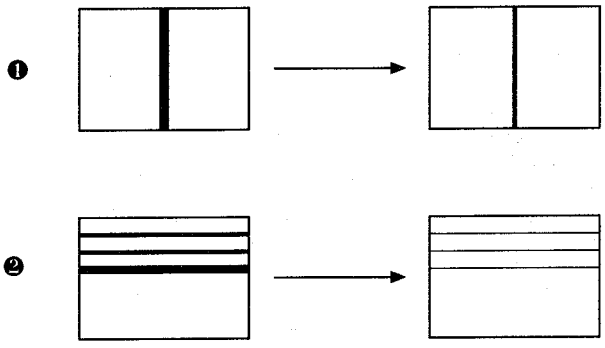

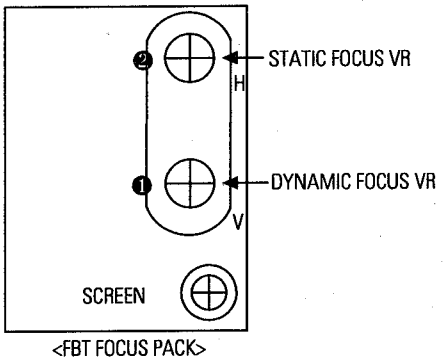

<FBT FOCUS PACK>

4-5 SCREEN Adjustment

1. Input Toshiba Pattern
2. Enter "Service Mode".(Refer to "Service Mode")
3. Select "G2-Adjust".
4. Set the values as example(Refer to page4-24).

ex) IBRM = 220
WDRV = 35
CDL = 220
COLR G B = 150 150 150

5. Turn the SCREEN VR until "MRCR G B" and "MRWDG" are green and those value are about 100. (The incorrect SCREEN Voltage may result that "MRCR G B" and "MRWDG" should be red)

Note 1.) When you do not have Toshiba Pattern, follow this method.

1. Set the TV on the condition that AV mode no signal(black)
2. Enter the "Menu" and set the mode to blue screen off.
3. Enter the "Service Mode".
4. Select " G2-Adjust".
5. Set the values as example(Refer to page4-24).

ex) IBRM = 220
WDRV = 35
CDL = 220
COLR G B = 150 150 150

6. Turn the SCREEN VR until the value of " MRCR G B" is about 120. Do not mind that the "OSD" Color is red.

■ After completing G2-Adjust, follow this procedure.

① Enter the "Video Adjust 1".
② Choose any item in menu. (ex. Select "Red Cutoff")
③ Change the value of item you select, and recover the value.

For example, when the value of "Red Cutoff" is 127, change the value to 128 and restore the value to 127.

If you do not follow this procedure, the picture may be abnormal.
For example, when the TV set is on, the picture becames brighter gradually.

4-6 E²PROM (IC902) Replacement

1. When IC902 is replaced, all adjustment data revert to the initial values.
   So, all adjustment values when servicing should be readjusted.
2. After IC902 is replaced, connect the AC power supply cord.
3. Turn the power switch ON.
4. In stand-by, warm up the TV for at least 10 seconds.
5. Power on the TV.

4-7 White Balance Adjustment

■ Equipment : Color-Analyzer (CA-100)
■ Input Signal : Pattern signal (Toshiba pattern)

1. Select STANDARD from the menu.
2. Input an 100% White pattern.
3. Enter the "Service Mode". (Refer to "4-8 Service Mode")
4. Warm up the TV set at least for 30 minutes.
5. Input a Toshiba pattern signal.
6. Enter the "Video Adjust1".
   - Adjust "Sub Contrast" so that Y (luminance) becomes 40 ft ± 3.
   - Use "Red Drive" and " Blue Drive" to adjust High-Light (x : 290, y : 300)
   - Adjust "Sub Bright" so that Y (luminance) becomes 1.3ft ± 0.3.
   - Use "Red Cutoff" and "Blue Cutoff" to adjust Low-Light (x : 290, y : 300).
7. Adjust CA-100 so that the final adjustment value can be fixed.
8. Use the Channel Up/Down (▲/▼) buttons to move the cursor on the adjustment modes.
9. Use the Volume +/- buttons to change the adjustment value.

■ SMPS Controller differentiol List

1265RB		1265RD	
LOC.	SPEC	LOC.	SPEC
DZ808	MTZ8.28	DZ808	MTZ8.28
C811	47NF	C811	47NF
C828	221.50V	C828	221.50V

Note 2. KS3A 29" Flat 50Hz, CRT Change(Double Focus → Single Focu)

■ Background : It is occurred to service confusion

■ Cause : CRT Socket PCB change as CRT changing from Double Focus to Single Focus

■ How to service

Code : It is different to CRT Socket Code per focus type

CRT Socket	Code No
For Double Focus	3704-001032
For Single Focus	3704-000114

Case :

1. Using CRT Socket PCB for Single Focus at CRT for Double Focus
   (1) Change the CRT Socket in PCB(Single → Double).
   (2) Cut the red-colored focus wire of FBT in set.
   (3) Connect the wires at Focus terminal like picture #1 for short circuit using red-colored focos wire of FTB.
2. Using CRT Socket PCB for Double Focus at CRT for Single Focus
   (1) Change the CRT Socket in PCB(Double → Single).
   (2) Cut the red-colored focus wire of FBT in set like picture #2.
   ※ You mus tape the isolation parts for safety.

4-8 Factory Adjustment

4-8-1 Service Mode

1. To enter the "Service Mode", Press the remote-control keys in this sequence :

   - If you do not have Factory remote-control

   PICTURE OFF → DISPLAY (+) → MENU → MUTE → PICTURE ON

   - If you have Factory remote-control

   PICTURE ON → DISPLAY (+) → FACTORY

2. After the Service Mode is entered, the initial screen is as shown in the figure below.

Service

Deflection
Video Adjust 1
Video Adjust 2
Video Adjust 3
Option(81h 0Ch)*
Reset
G2-Adjust
Others

* These hexa digits are check sum value which depends on the MICOM.
If check sum value is changed, the value of E^2PROM Data newly initialed.

3. Use the Channel Up/Down buttons to move the cursor in the adjustment parameters.

Note 3.

- When CRT, CRT PCB, FBT, E^2PROM (sometimes MICOM) is replaced, the adjustment values should be controlled.

- After the Service adjustment is completed, Do not select "Reset" in the service mode menu. (After above procedure is done, power is on initially and the "Plug and Play" will be operated.)

4-8-2 Memory Data

4-8-2(A) DEFLECTION (GEOMETRIC ADJUSTMENT VALUE)

No.	OSD	Function	Remark
1	V Amp	Adjusts Vertical picture size. Adjust 4:4 upper and below picture size in lion head pattern at factory.	Adjust
2	V Shift	Adjusts Vertical picture position	Adjust
3	V Slope	Adjusts Vertical Slope Correction	Adjust
4	V SC	Adjusts Vertical s-correction	Fix
5	H EW	Horizontal east west width. Adjust 5:5 left and right picture size in lion head pattern at factory.	Adjust
6	H Trapizium	Adjusts horizontal Trapezium.	Adjust
7	H Parabola	Adjusts Horizontal Parabola.	Adjust
8	H Symmetry	Adjusts Picture upper and below horizontal Symmetry.	Fix
9	H Corner	Adjusts Picture upper and below Horizontal Corner.After adjust the Parabola, adjust H corner vertical Line upper and below has nonlinear.	Adjust
10	H Shift	Adjusts Horizontal Position.	Adjust
11	Zoom 4:3 Para	Corrects the vertical linearity in Zoom mode of P-SIZE. The data depends on CRT (see data above)	Fix
12	4:3~16:9 Para	Corrects the vertical linearity in 16:9 mode of P-SIZE. The data differs according to CRT (see data above).	Adjust
13	Wide-4:3 Para	Corrects the vertical linearity in wide mode of P-SIZE. The data differs according to CRT (see data above).	Adjust
14	Wide-Zoom Para	Corrects the vertical linearity in wide mode of P-SIZE. The data differs according to CRT (see data above).	Adjust
15	Wide-Zoom2 Para	Corrects the vertical linearity in wide mode of P-SIZE. The data differs according to CRT (see data above).	Fix
16	Zoom1 Amp	Adjusts vertical amplitude in zoom1	Fix
17	Zoom2 Amp	Adjusts vertical amplitude in zoom2. Zoom2 mode is a manual zoom mode	Fix
18	TTX Position	Sets TTX Position.	Fix
19	D-TTX Posi	Double -TTX position.	Fix
20	RGB Shift	Adjusts RGB input signal Horizontal position	Fix
21	PIP Contrast	Adjusts PIP contrast.	Fix
22	PIP Tint	Adjusts PIP Tint. It is a function to control color phase of NTSC signal in PIP	Fix
23	PIP V.Move(VSPDEL)	PIP vertical sync pulse delay. When changing data, PIP jitters at two points. In this case, the PIP VSPDEL is set to the center between two points.	Fix
24	PIP PAL V.Pos	Adjusts Vertical position of PIP in PAL system.	Fix
25	PIP NTSC V.Pos	Adjusts Vertical position of PIP in NTSC system.	Fix
26	PIP H.Pos	Adjusts Horizontal Position of the PIP.	Fix
27	PIP BLKLG	PIP blanking level green(PIP low light white balance). It is used to control low light white balance in PIP	Fix

OSD	RANGE	INITIAL DATA							Remarks
		SIM-806HEW							
		32W8VH Philips Invar Flat	32W8VH Thomson Invar Flat	28C7VH Thomson Invar 2.0R	28C7H Thomson AK 2.0R	28C7H Philips Invar 2.0R	28W6 Thomson AK 2.0R	32W6V Thomson Invar 2.0R	
V Amp	0 ~ 255	80	92	85	129	129	84	80	GEOM
V Shift	0 ~ 255	104	111	108	110	110	117	116	GEOM
V Slope	0 ~ 255	125	130	130	130	130	130	115	FIX
V SC	0 ~ 255	117	225	200	200	200	200	150	FIX
H EW	0 ~ 255	125	215	205	187	187	172	232	GEOM
H Trapizium	0 ~ 255	85	113	91	114	114	108	107	GEOM
H Parabola	0 ~ 255	65	96	65	91	91	82	92	GEOM
H Corner L	0 ~ 255	45	121	118	118	118	118	73	FIX
H Corner L	0 ~ 255	88	122	136	136	136	136	92	FIX
H Shift	0 ~ 255	185	170	174	180	180	177	185	GEOM
BOW	0 ~ 255	132	130	123	123	123	121	123	GEOM
Amgle	0 ~ 255	129	140	129	129	129	132	129	GEOM
H Corner U6	0 ~ 255	176	76	140	133	133	135	159	GEOM
H Corner L6	0 ~ 255	176	78	136	129	129	126	158	GEOM
V Max	0 ~ 255	128	128	213	213	213	128	128	FIX
Zoom1 Amp	0 ~ 255	150	143	180	180	180	146	150	FIX
Zoom2 Amp	0 ~ 255	202	173	202	202	202	171	190	FIX
Zoom Trap	0 ~ 255	128	128	128	128	128	128	128	FIX
H-QEW	0 ~ 255	-	128	-	128	-	128	-	-
Zoom 4:3 Para	0 ~ 255	-	-	-	-	-	-	-	-
4:3~16:9 Para	0 ~ 255	-	-	-	-	-	-	-	-

OSD	RANGE	INITIAL DATA						Remarks
		SIM-806HEW		SIM-806HMA/806HEA/806HC				
		29A8VH SED Invar Flat	28W8VH SED Invar Flat	29A7HP SED V-Before	29A7HP SED V-After	34A7HP Toshiba V-Before	34A7HP Toshiba V-After	
V Amp	0 ~ 255	128	104	148	106	133	124	GEOM
V Shift	0 ~ 255	153	109	149	141	151	125	GEOM
V Slope	0 ~ 255	133	107	134	134	134	125	FIX
V SC	0 ~ 255	210	175	206	206	189	210	FIX
H EW	0 ~ 255	109	161	183	195	179	215	GEOM
H Trapizium	0 ~ 255	108	124	110	105	95	92	GEOM
H Parabola	0 ~ 255	112	110	94	79	81	71	GEOM
H Corner L	0 ~ 255	125	108	130	130	145	134	FIX
H Corner L	0 ~ 255	118	111	133	143	150	159	FIX
H Shift	0 ~ 255	183	188	195	195	186	189	GEOM
BOW	0 ~ 255	123	127	127	127	127	127	GEOM
Amgle	0 ~ 255	129	127	128	128	128	128	GEOM
H Corner U6	0 ~ 255	126	138	131	131	127	133	GEOM
H Corner L6	0 ~ 255	136	140	130	130	134	126	GEOM
V Max	0 ~ 255	200	127	200	200	200	200	FIX
Zoom1 Amp	0 ~ 255	195	148	187	179	198	189	FIX
Zoom2 Amp	0 ~ 255	202	178	-	-	-	-	FIX
Zoom Trap	0 ~ 255	128	128	128	128	131	131	FIX
H-QEW	0 ~ 255	128	128	128	128	128	128	-
Zoom 4:3 Para	0 ~ 255	-	-	-	-	-	-	-
4:3~16:9 Para	0 ~ 255	-	-	5	5	5	5	-

OSD	RANGE	INITIAL DATA								Remarks
		SIM-812MA3			SIM-812MAD	SIM-806MA3		SIM-812EA1	SIM-806EI1	
		29" Flat/ DVD	CIS 29" Flat	CIS 29" Flat SKD CKD	29" Flat	34" Flat	29" Flat	29" Flat	29" Flat	
V Amp		-30/55	-30	-30	-45	7	-55	-55	-65	GEOM
V Shift		-7	-7	-7	-2	-22	-7	-7	-7	GEOM
V Slope		-3	-3	-3	-3	-7	-3	-3	-3	GEOM
V SC		-17	-17	-17	-17	-15	-17	-17	-15	FIX
H EW		30	30	30	30	-8	30	30	30	GEOM
H Trapizium		-47	-47	-47	-34	-22	-47	-47	-47	GEOM
H Parabola		-7	-7	-7	10	-6	-7	-7	-7	GEOM
H Symmetry		10/13	13	13	10	10	10	10	10	FIX
H Corner		23	23	23	-10	-8	23	23	23	GEOM
H Shift		13	13	13	27	-13	13	13	13	GEOM
PIP Contrast		8	8	8	10	7	8	8	10	FIX
PIP Tint		0	0	0	0	0	0	0	0	FIX
PIP V.Move(VSPDEL)		0	17	0	17	8	17	17	17	FIX
PIP PAL V.Pos		26	26	26	23	26	26	26	25	FIX
PIP NTSC V.Pos		23	23	23	20	23	23	23	25	FIX
PIP H.Pos		30	30	30	27	30	30	30	30	FIX
PIP BLKLG		6	6	6	3	6	6	6	7	FIX

OSD	RANGE	SIM-806EI3		Remarks
		21" Flat	29" Normal	
V Amp		-51	-23	GEOM
V Shift		-32	-23	GEOM
V Slope		-4	-8	GEOM
V SC		-2	0	FIX
H EW		0	42	GEOM
H Trapizium		0	-40	GEOM
H Parabola		0	-60	GEOM
H Symmetry		0	13	FIX
H Corner		0	70	GEOM
H Shift		24	10	GEOM
PIP Contrast		15	15	FIX
PIP Tint		0	0	FIX
PIP V.Move(VSPDEL)		11	8	FIX
PIP PAL V.Pos		25	25	FIX
PIP NTSC V.Pos		25	25	FIX
PIP H.Pos		30	47	FIX
PIP BLKLG		7	7	FIX

4-8-2(B) SCREEN CHANGE (I2C BUS GEOMETRIC ADJUSTMENT)

1 V Amp

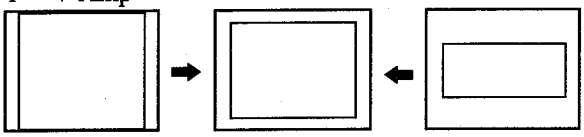

2 V Shift

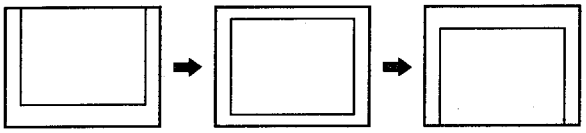

3 V Slope

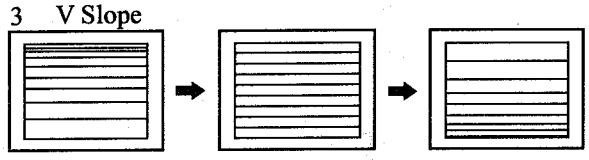

4 V SC

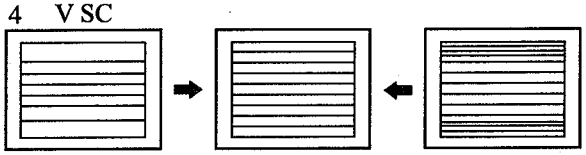

5 H EW

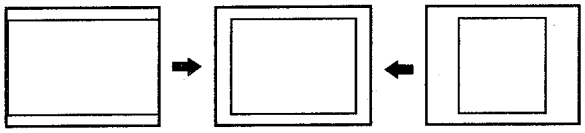

6 H Trapizium

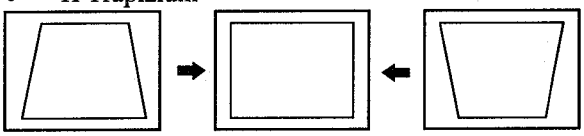

7 H Parabola

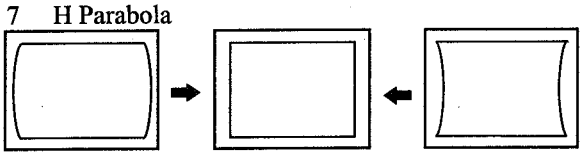

8 H Symmetry

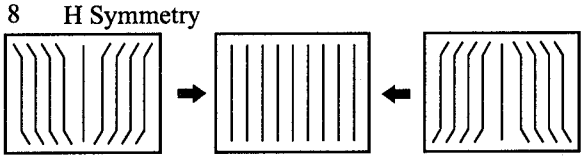

9 H Corner

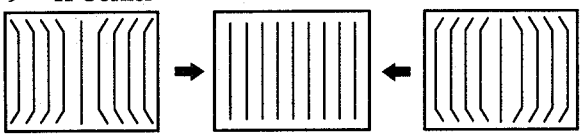

10 H Shift

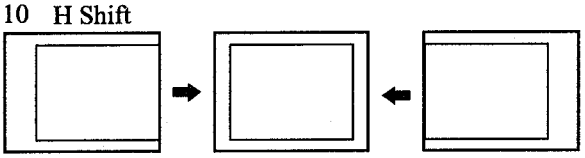

4-8-2(C) VIDEO ADJUST 1

No.	OSD	Function	Remark
1	Red Cufoff	Adjusts the gain of red output of low light	Adjusts
2	Green Cutoff	Adjusts the gain of green output of low light.Fix this gain to 127.	Fix
3	Blue Cutoff	Adjusts the gain of blue output of low light.	Adjusts
4	Red Drive	Adjusts the gain of red output of high light.	Adjusts
5	Green Drive	Adjusts the gain of green output of high light. After "G2-Adjustment" and White Balance adjustments are complete,this data is fixed to 127..	Fix
6	Blue Drive	Adjusts the gain for blue output of high light.	Adjusts
7	Sub Bright	Adjust sub brightness level to set the low light luminance in Picture Standard mode.	Adjusts
8	Sub Contrast	Adjusts sub contrast level to set the high light luminance in Pictue Standard mode. Set the value of sub contrast to near 50. The user control "contrast" depends on this value.User contrast=[sub cont*2/100]If sub contrast data is 10, user contrast changes into 1/5step	Adjusts
9	Sub Color	Adjusts sub color level to set the gain for color in Picture Standard mode.	Fix
10	Sub Tint	Adjusts the sub tint level of NTSC color system.	Fix
11	BCL Threshold	Beam Current Limit threshold current if SENSE input used 0...-2048 BCL threshold current if RSW1 input used(max. ADC output ~2047))	Fix
12	BCL Gain	Beam Current Limit loop Gain	Fix
13	BCL Time	BCL time constant; 0 = off	Fix
14	BCL Time2	Teletext Contrast Level	Fix
15	BCL Bri Reduction	BCL Brighness Reduction	Fix
16	P.DK.YC Delay	PAL-D/K Y/C Delay	Fix
17	P.I.YC Delay	PAL-I Y/C Delay	Fix
18	P.L.YC Delay	PAL-L Y/C Delay	Fix
19	S.BG.YC Delay	SECAM-B/G Y/C Delay	Fix
20	S.DK.YC Delay	SECAM-D/K Y/C Delay	Fix
21	S.L.YC Delay	SECAM-L Y/C Delay	Fix
22	P.BG.YC Delay	PAL-B/G Y/C Delay	Fix
23	P.YC Delay	External PAL Y/C Delay	Fix
24	S.YC Delay	External SECAM Y/C Delay	Fix
25	N.YC Delay	External NTSC Y/C Delay	Fix
26	P.M.YC Delay	PAL-M Y/C DELAY	Fix
27	N.MYC Delay	NTSC-M YC DELAY	Fix

Note 4.) Beam Control Limit Characteristic

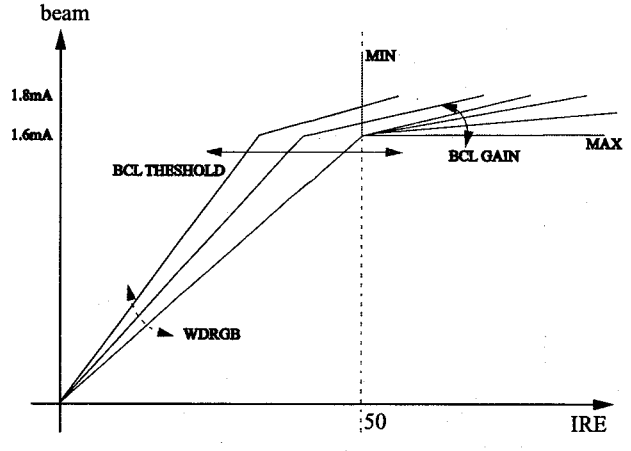

OSD	RANGE	INITIAL DATA										Remarks
		SIM-806EW1(SEH)										
		21" 4:3 SED AK	21" 4:3 Tho AK	25" 4:3 SED AK	25" 4:3 SED AK	28" 4:3 Tho AK	28" 4:3 Phi/Tho Invar	29" 4:3 SED Flat	24" WIDE Phi AK	24" WIDE Phi Invar	24" WIDE Tho Invar	
Red Cufoff		116	127	117	117	118	128	127	119	127	127	W/B
Green Cutoff		127	127	127	133	127	127	127	127	127	127	Fix
Blue Cutoff		158	127	134	134	127	135	127	130	128	127	W/B
Red Drive		139	127	161	161	162	147	127	145	150	127	W/B
Green Drive		127	127	127	127	127	127	127	127	127	127	Fix
Blue Drive		89	127	83	83	110	105	127	131	127	127	W/B
Sub Bright		1.2 ftl	1.2 ftl	1.2 ftl	1.2 ftl	1.2 ftl	1.2 ftl	1.2 ftl	1.2 ftl	1.2 ftl	1.2 ftl	
		100	100	111	100	107	118	100	100	112	100	W/B
Sub Contrast		28 ftl	28 ftl	28 ftl	28 ftl	28 ftl	32 ftl	32 ftl	28 ftl	32 ftl	32 ftl	
		51	51	57	51	52	51	51	51	51	51	W/B
Sub Color		27	27	27	27	27	27	27	27	27	27	Fix
Sub Tint		80	80	80	80	80	80	80	80	80	80	Fix
BCL Threshold		30	30	27	27	35	55	40	26	85	40	Fix
BCL Gain		9	9	13	13	9	9	10	12	9	10	Fix
BCL Time		10	10	10	10	10	10	10	10	10	10	Fix
BCL Time2		90	90	90	90	90	90	90	90	90	90	Fix
BCL Bri Reduction		3	3	3	3	3	3	3	3	3	3	Fix
P.DK.YC Delay		6	6	6	6	6	6	6	6	6	6	Fix
P.I.YC Delay		6	6	6	6	6	6	6	6	6	6	Fix
P.L.YC Delay		7	7	7	7	7	7	7	7	7	7	Fix
S.BG.YC Delay		3	3	3	3	3	3	3	3	3	3	Fix
S.DK.YC Delay		5	5	5	5	5	5	5	5	5	5	Fix
S.L.YC Delay		8	8	8	8	8	8	8	8	8	8	Fix
P.BG.YC Delay		5	5	5	5	5	5	5	5	5	5	Fix
P.YC Delay		4	4	4	4	4	4	4	4	4	4	Fix
S.YC Delay		1	1	1	1	1	1	1	1	1	1	Fix
N.YC Delay		4	4	4	4	4	4	4	4	4	4	Fix

OSD	RANGE	SIM-806EW1(SEH)						SIM-806EW1(HQ)				Remarks
		28" WIDE Tho AK	28" WIDE Tho Invar	32" WIDE Tho Invar	28" WIDE SED Flat	32" WIDE Phi Flat	32" WIDE Tho Flat	29" Flat	21" Flat	25" Flat	21' LG Pin Free	
Red Cufoff	0 ~ 255	131	130	132	117	129	145	127	127	127	127	W/B
Green Cutoff	0 ~ 255	127	127	127	133	127	127	127	127	127	127	Fix
Blue Cutoff	0 ~ 255	133	131	128	134	127	107	127	127	127	122	W/B
Red Drive	0 ~ 255	147	164	157	161	168	146	127	127	127	149	W/B
Green Drive	0 ~ 255	127	127	127	127	127	127	127	127	127	127	Fix
Blue Drive	0 ~ 255	121	106	86	127	110	116	127	127	127	124	W/B
Sub Bright		1.2 ftl	1.2 ftl	1.2 ftl	1.2 ftl	1.2 ftl	1.2 ftl					
	0 ~ 200	93	105	100	100	109	117	100	100	100	149	W/B
Sub Contrast		28 ftl	32 ftl	32 ftl	32 ftl	32 ftl	32 ftl					
	0 ~ 63	55	51	51	51	52	51	45	45	45	38	W/B
Sub Color	0 ~ 27	27	27	27	27	27	27	27	27	27	27	Fix
Sub Tint	0 ~ 127	80	80	80	80	80	80	80	80	80	80	Fix
BCL Threshold	0 ~ 255	33	35	43	46	48	49	40	59	40	59	Fix
BCL Gain	0 ~ 15	9	/8	/9	12	10	13	7	8	7	8	Fix
BCL Time	0 ~ 15	10	10	10	10	10	10	10	13	10	15	Fix
BCL Time2	0 ~ 15	90	90	90	90	90	90	-	-	-	-	Fix
BCL Bri Reduction	0 ~ 255	3	3	3	3	3	3	-	-	-	-	Fix
P.DK.YC Delay	0 ~ 8	6	6	6	6	6	6	7	7	7	7	Fix
P.I.YC Delay	0 ~ 8	6	6	6	6	6	6	7	7	7	7	Fix
P.L.YC Delay	0 ~ 8	7	7	7	7	7	7	5	5	5	5	Fix
S.BG.YC Delay	0 ~ 8	3	3	3	3	3	3	3	3	3	3	Fix
S.DK.YC Delay	0 ~ 8	5	5	5	5	5	5	5	5	5	5	Fix
S.L.YC Delay	0 ~ 8	8	8	8	8	8	8	5	5	5	5	Fix
P.BG.YC Delay	0 ~ 8	5	5	5	5	5	5	3	3	3	3	Fix
P.YC Delay	0 ~ 8	4	4	4	4	4	4	4	4	4	4	Fix
S.YC Delay	0 ~ 8	1	1	1	1	1	1	1	1	1	1	Fix
N.YC Delay	0 ~ 8	4	4	4	4	4	4	4	4	4	4	Fix
S.I YC Delay	0 ~ 8	-	-	-	-	-	-	7	7	7	7	Fix
TTX Contrast	0 ~ 255		-	-	-	-	-	90	120	90	120	Fix

OSD	RANGE	INITIAL DATA								Remarks
		SIM-812MA3			SIM-812MAD	SIM-806MA3		SIM-812EA1	SIM-806EI1	
		29" Flat/ DVD	CIS 29" Flat	CIS 29" Flat SKD CKD	29" Flat	34" Flat	29" Flat	29" Flat	29" Flat	
Red Cufoff	0 ~ 255	127	127	127	127	127	127	127	127	W/B
Green Cutoff	0 ~ 255	127	127	127	127	127	127	127	127	Fix
Blue Cutoff	0 ~ 255	127	127	127	127	127	127	127	127	W/B
Red Drive	0 ~ 255	127	127	127	127	127	127	127	127	W/B
Green Drive	0 ~ 255	127	127	127	127	127	127	127	127	Fix
Blue Drive	0 ~ 255	127	127	127	127	127	127	127	127	W/B
Sub Bright	0 ~ 200	100	100	100	100	100	100	100	100	W/B
Sub Contrast	0 ~ 63	45	45	45	45	45	45	45	45	W/B
Sub Color	0 ~ 27	27	27	27	27	27	27	27	27	Fix
Sub Tint	0 ~ 127	80	80	80	40	40	40	40	30	Fix
BCL Threshold	0 ~ 255	65	65	65	65	65	65	65	65	Fix
BCL Gain	0 ~ 15	8	8	8	8	8	8	8	8	Fix
BCL Time	0 ~ 15	9	9	9	6	6	8	8	8	Fix
TTX Contrast	0 ~ 255	90	90	90	90	90	90	90	-	Fix
P.YC Delay	0 ~ 8	4	4	4	4	4	4	4	4	Fix
S.YC Delay	0 ~ 8	1	1	1	1	1	1	1	1	Fix
N.YC Delay	0 ~ 8	4	4	4	4	4	4	4	4	Fix
P.BG YC Delay	0 ~ 8	3	3	3	3	3	3	3	3	Fix
P.DK YC Delay	0 ~ 8	6	6	6	6	6	6	6	6	Fix
P.I YC Delay	0 ~ 8	6	6	6	6	6	6	6	6	Fix
S.BG YC Delay	0 ~ 8	1	1	1	1	1	1	1	1	Fix
S.DK YC Delay	0 ~ 8	5	5	5	5	5	5	5	5	Fix
S.I YC Delay	0 ~ 8	8	8	8	8	8	8	8	8	Fix
P.M.YC Delay	0 ~ 8	7	7	7	7	7	7	7	7	Fix
N.MYC Delay	0 ~ 8	3	3	3	3	3	3	3	3	Fix

OSD	RANGE	SIM-806EI3		Remarks
		29" Normal	21' Flat	
Red Cufoff	0 ~ 255	127	127	W/B
Green Cutoff	0 ~ 255	127	127	Fix
Blue Cutoff	0 ~ 255	127	127	W/B
Red Drive	0 ~ 255	127	127	W/B
Green Drive	0 ~ 255	127	127	Fix
Blue Drive	0 ~ 255	127	127	W/B
Sub Bright	0 ~ 200	100	100	W/B
Sub Contrast	0 ~ 63	45	45	W/B
Sub Color	0 ~ 27	27	27	Fix
Sub Tint	0 ~ 127	30	30	Fix
BCL Threshold	0 ~ 255	67	62	Fix
BCL Gain	0 ~ 15	9	9	Fix
BCL Time	0 ~ 15	10	13	Fix
TTX Contrast	0 ~ 255	-	-	Fix
P.YC Delay	0 ~ 8	4	4	Fix
S.YC Delay	0 ~ 8	1	1	Fix
N.YC Delay	0 ~ 8	4	4	Fix
P.BG YC Delay	0 ~ 8	3	3	Fix
P.DK YC Delay	0 ~ 8	6	6	Fix
P.I YC Delay	0 ~ 8	6	6	Fix
S.BG YC Delay	0 ~ 8	1	1	Fix
S.DK YC Delay	0 ~ 8	5	5	Fix
S.I YC Delay	0 ~ 8	8	8	Fix
P.M.YC Delay	0 ~ 8	7	7	Fix
N.MYC Delay	0 ~ 8	3	3	Fix

4-8-2(D) VIDEO 2 ADJUST

No.	OSD	Range	Function	Remark
1	B stretch-BTHR	0 ~255	Black stretch thresholdLuminance peaking filter coring.	Fix
2	B stretch-BTLT	0 ~10	BLACK stretch tilt position	Fix
3	B stretch-BAM	0 ~20	BLACK stretch amountAdjusts RGB input signal contrast	Fix
4	Coring	0 ~127	Luminance peaking filter, coring level	Fix
5	NR Off Value	0 ~63	Luminance peaking filter coring.	FiX
6	Melody Volume	0 ~255	Sets the level of melody volume in Picture ON. Differently controlled according to buyer and area.	Fix
7	RGB Bright	0 ~255	Adjust RGB input signal brightness	Fix
8	RGB Contrast	0 ~255	Adjust RGB input signal contrast	Fix
9	EHT Time	0 ~255	Electronics high tension time. According to change of Beam, EHT vertical correction time.	Fix
10	EHT Vertical	0 ~255	EHT compensation coefficent vertical.	Fix

Note 5. **EHT compensation Characteristic**

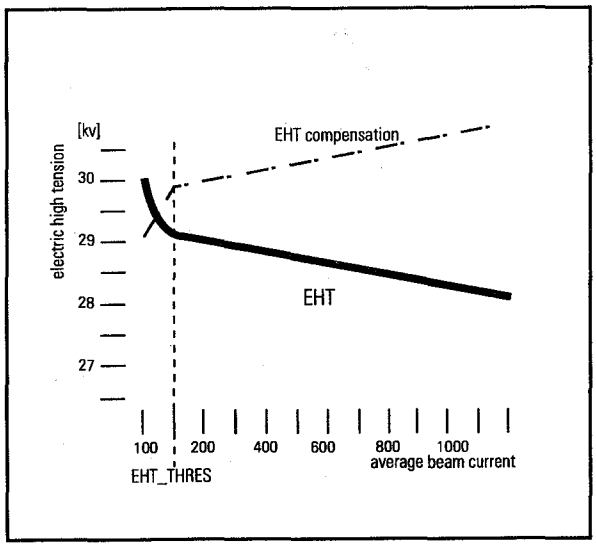

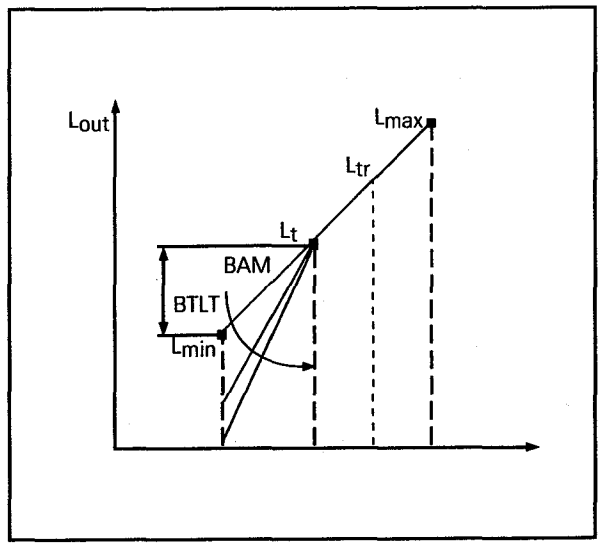

OSD	RANGE	INITIAL DATA						Remarks
		SIM-806EW1(SEH)						
		21" 4:3 SED/Tho AK	25" 4:3 SED/Tho AK	28" 4:3 Tho AK	28" 4:3 Phi/Tho Invar	29" 4:3 SED Flat	24" WIDE Phi AK	
B stretch-BTHR	0 ~ 55	0	0	0	0	0	0	Fix
B stretch-BTLT	0 ~ 15	0	0	0	0	0	0	Fix
B stretch-BAM	0 ~ 31	0	0	0	0	0	0	Fix
Coring	0 ~ 31	25	25	25	25	25	25	Fix
NR Off Value	0 ~ 10	3	3	3	3	3	3	Fix
Melody Volume	0 ~ 20	8	8	8	8	8	8	Fix
RGB Bright	0 ~ 255	45	45	45	45	45	45	Fix
RGB Contrast	0 ~ 80	0	0	0	0	0	0	Fix
EHT Time	0 ~ 255	0	0	0	0	0	0	Fix
EHT Compesation	-	90	30	30	30	90	140	Fix
VSU	96 ~ 111	110	110	110	110	110	110	Fix
OSD	RANGE	SIM-806EW1(SEH)						Remarks
		24" WIDE Phi/Tho AK	28" WIDE Phi/Tho AK	28" WIDE Phi/Tho Invar	32" WIDE Phi/Tho Invar	28" WIDE Phi/SED Flat	32" WIDE Phi/Tho Flat	
B stretch-BTHR	0 ~ 55	0	0	0	0	0	0	Fix
B stretch-BTLT	0 ~ 15	0	0	0	0	0	0	Fix
B stretch-BAM	0 ~ 31	0	0	0	0	0	0	Fix
Coring	0 ~ 31	25	25	25	25	25	25	Fix
NR Off Value	0 ~ 10	3	3	3	3	3	3	Fix
Melody Volume	0 ~ 20	8	8	8	8	8	8	Fix
RGB Bright	0 ~ 255	45	45	45	45	45	45	Fix
RGB Contrast	0 ~ 80	0	0	0	0	0	0	Fix
EHT Time	0 ~ 255	0	0	0	0	0	0	Fix
EHT Compesation	-	30	95	95	90	90	90	Fix
VSU	96 ~ 111	110	110	110	110	110	110	Fix

OSD	RANGE	INITIAL DATA						Remarks
		SIM-806EW1(HQ)				SIM-812MA3		
		29" Flat	21" Flat	25" Flat	21" LG Pin Free	29" Flat/DVD	CIS 29" Flat	
B stretch-BTHR	0 ~ 55	0	0	0	50	50	50	Fix
B stretch-BTLT	0 ~ 15	0	0	0	8	8	8	Fix
B stretch-BAM	0 ~ 31	0	0	0	4	4	4	Fix
Coring	0 ~ 31	25	25	25	31	25	20	Fix
NR Off Value	0 ~ 10	3	3	7	7	-	-	Fix
Melody Volume	0 ~ 20	8	8	8	8	-	-	Fix
RGB Bright	0 ~ 255	45	45	45	45	45	45	Fix
RGB Contrast	0 ~ 80	0	0	15	0	0	0	Fix
EHT Time	0 ~ 255	0	0	0	0	0/3	0	Fix
EHT Compesation	-	30	95	90	90	-	-	Fix
VSU	96 ~ 111	110	110	100	100	-	-	Fix
EHT Vertical	0 ~ 255	-	-	-	-	90	90	

OSD	RANGE	SIM-812MA3	812MAD	SIM-806MA3		SIM-812EA1	SIM-806EI1	Remarks
		CIS 29" Flat SKD CKD	29" Flat	34" Flat	29" Flat	29" Flat	29" Flat	
B stretch-BTHR	0 ~ 55	50	50	50	50	50	50	Fix
B stretch-BTLT	0 ~ 15	8	8	8	8	8	8	Fix
B stretch-BAM	0 ~ 31	4	4	4	4	4	4	Fix
Coring	0 ~ 31	20	25	25	25	25	25	Fix
NR Off Value	0 ~ 10	-	-	-	-	-	-	Fix
Melody Volume	0 ~ 20	-	-	-	-	-	-	Fix
RGB Bright	0 ~ 255	45	45	80	45	45	50	Fix
RGB Contrast	0 ~ 80	0	0	24	0	0	0	Fix
EHT Time	0 ~ 255	0	3	3	3	3	3	Fix
EHT Compesation	-	-	-	-	-	-	-	Fix
VSU	96 ~ 111	-	-	-	-	-	-	Fix
EHT Vertical	0 ~ 255	90	90	60	90	90	90	Fix

OSD	RANGE	SIM-806EI3		Remarks
		29" Normal	21" Flat	
B stretch-BTHR	0 ~ 55	50	50	Fix
B stretch-BTLT	0 ~ 15	8	8	Fix
B stretch-BAM	0 ~ 31	4	4	Fix
Coring	0 ~ 31	31	31	Fix
NR Off Value	0 ~ 10	-	-	Fix
Melody Volume	0 ~ 20	-	-	Fix
RGB Bright	0 ~ 255	50	50	Fix
RGB Contrast	0 ~ 80	40	40	Fix
EHT Time	0 ~ 255	3	3	Fix
EHT Compesation	-	-	-	Fix
VSU	96 ~ 111	-	-	Fix
EHT Vertical	0 ~ 255	60	90	Fix

4-8-2(E) VIDEO 3 ADJUST

No.	OSD	Function	Remark
1	Peak Threshold	White peak level threshold	Fix
2	Soft Limit Slope B	Refer to picture below	Fix
3	Hard Limit	Refer to picture below	Fix
4	Peak Video Ref	White peak level threhold reference	Fix
5	Peak Video Gain	White peak level threshild gain	FiX
6	ACC Ref=(PAL/NTSC)	Auto color control gain(PAL/NTSC)	Fix
7	ACCR(SECAM)	Auto color control gain(SECAM)	Fix
8	Gain1(Video)	Velocity video gain	Fix
9	Delay1(Video)	Velocity video delay	Fix
10	Velocity Limit	Velocity limit	Fix
11	Velocity Delay	Velocity delay	Fix
12	Velocity Coring	Velocity frequency coring	Fix
13	RGB Shift	Adjust RGB input signal Horizontal position	Fix
14	HB START	Horizontal blainking start	Fix
15	HB STOP	Horizontal blainking stop	FiX
16	2H CombFilter	Comb filter on/off (0:Comb filter off 1:Comb filter on) VDP3108 has no function of Comb filter. In VDP3112B/VDP3130Y/VDP3120B, Set 'on'.	Fix
17	NR Off Value	Adjusts Digital NR off value	Fix
18	Color hys(SECAM)	Color killing hysteresys(SECAM)	Fix
19	Color hys(PAL)	Color killing hysteresys(PAL)	Fix

Note 6. **Soft Limit & Hard Limit**

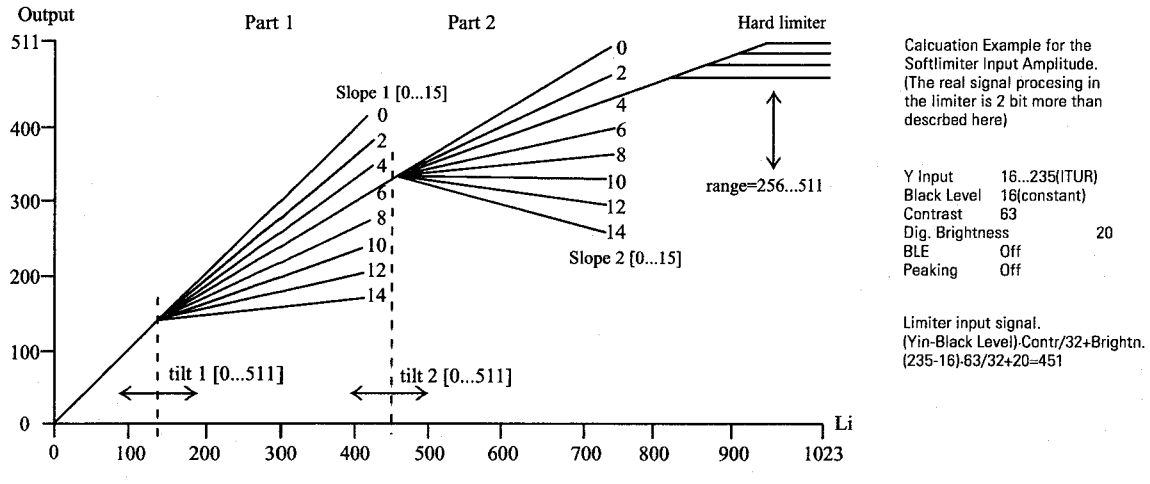

Calcuation Example for the Softlimiter Input Amplitude. (The real signal procesing in the limiter is 2 bit more than descrbed here)

Y Input	16...235(ITUR)
Black Level	16(constant)
Contrast	63
Dig. Brightness	20
BLE	Off
Peaking	Off

Limiter input signal.
(Yin-Black Level)·Contr/32+Brightn.
(235-16)·63/32+20=451

OSD	RANGE	INITIAL DATA						Remarks
		SIM-806EW1(SEH)						
		21" 4:3 SED/Tho AK	25" 4:3 SED/Tho AK	28" 4:3 Tho AK	28" 4:3 Phi/Tho Invar	29" 4:3 SED Flat	24" WIDE Phi AK	
Peak Threshold	0 ~ 255	100	100	100	100	100	100	Fix
Soft Limit Slope B	0 ~ 15	8	8	8	8	8	8	Fix
Hard Limit	0 ~ 4	255	255	255	255	255	255	Fix
Peak Video Ref	0 ~ 255	1	1	1	1	1	1	Fix
Peak Video Gain	0 ~ 5	2	2	2	2	2	2	Fix
ACC Ref=(PAL/NTSC)	0 ~ 40	20	20	20	20	20	20	Fix
ACCR(SECAM)	0 ~ 39	20	20	20	20	20	20	Fix
Gain1(Video)	0 ~ 31	63	63	63	63	63	63	Fix
Delay1(Video)	0 ~ 15	1	1	1	1	1	1	Fix
Velocity Limit	0 ~ 127	63	63	63	63	63	63	Fix
Velocity Delay	0 ~ 15	7	7	7	7	7	7	Fix
Velocity Coring	0 ~ 15	2	2	2	2	2	2	Fix
OSD	RANGE	SIM-806EW1(SEH)						Remarks
		24" WIDE Phi/Tho AK	28" WIDE Phi/Tho AK	28" WIDE Phi/Tho Invar	32" WIDE Phi/Tho Invar	28" WIDE Phi/SED Flat	32" WIDE Phi/Tho Flat	
Peak Threshold	0 ~ 255	100	100	100	100	100	100	Fix
Soft Limit Slope B	0 ~ 15	8	8	8	8	8	8	Fix
Hard Limit	0 ~ 4	255	255	255	255	255	255	Fix
Peak Video Ref	0 ~ 255	1	1	1	1	1	1	Fix
Peak Video Gain	0 ~ 5	2	2	2	2	2	2	Fix
ACC Ref=(PAL/NTSC)	0 ~ 40	20	20	20	20	20	20	Fix
ACCR(SECAM)	0 ~ 39	20	20	20	20	20	20	Fix
Gain1(Video)	0 ~ 31	63	63	63	63	63	63	Fix
Delay1(Video)	0 ~ 15	1	1	1	1	1	1	Fix
Velocity Limit	0 ~ 127	63	63	63	63	63	63	Fix
Velocity Delay	0 ~ 15	7	7	7	7	7	7	Fix
Velocity Coring	0 ~ 15	2	2	2	2	2	2	Fix
OSD	RANGE	SIM-806EW1(HQ)				SIM-812MA3		Remarks
		29" Flat	21" Flat	25" Flat	21" LG Pin Free	29" Flat/DVD	CIS 29" Flat	
Peak Threshold	0 ~ 255	185	255	185	255	185	185	Fix
Soft Limit Slope B	0 ~ 15	4	4	4	4	5	5	Fix
Hard Limit	0 ~ 4	160	255	160	255	180	180	Fix
Peak Video Ref	0 ~ 255	1	0	1	0	0	0	Fix
Peak Video Gain	0 ~ 5	3	0	3	0	0	0	Fix
ACC Ref=(PAL/NTSC)	0 ~ 40	20	20	20	20	33	33	Fix
ACCR(SECAM)	0 ~ 39	20	20	20	20	39	39	Fix
Gain1(Video)	0 ~ 31	11	11	11	11	31	31	Fix
Delay1(Video)	0 ~ 15	3	3	3	3	3	3	Fix
Velocity Limit	0 ~ 127	74	74	74	74	127	127	Fix
Velocity Delay	0 ~ 15	7	7	7	7	7	7	Fix
Velocity Coring	0 ~ 15	10	10	10	10	3	3	Fix
RGB Shift	0 ~ 255	-	-	-	-	-	109	Fix
HB START	0 ~ 3	121	121	121	121	121/117	121	Fix
HB STOP	0 ~ 255	173	173	173	173	173/168	173	Fix
2H CombFilter	0 ~ 1	-	-	-	-	1	1	Fix
NR Off Value	0 ~ 10	-	-	-	-	0	0	Fix
Color hys(SECAM)	0 ~ 255	-	-	-	-	166	166	Fix
Color hys(PAL)	0 ~ 255	-	-	-	-	200	200	Fix

OSD	RANGE	INITIAL DATA						Remarks
		SIM-812MA3	812MAD	SIM-806MA3		SIM-812EA1	SIM-806EI1	
		CIS 29" Flat SKD CKD	29" Flat	34" Flat	29" Flat	29" Flat	29" Flat	
Peak Threshold	0 ~ 255	185	185	185	185	185	185	Fix
Soft Limit Slope B	0 ~ 15	5	5	5	5	5	5	Fix
Hard Limit	0 ~ 4	180	180	180	180	180	180	Fix
Peak Video Ref	0 ~ 255	0	0	0	0	0	0	Fix
Peak Video Gain	0 ~ 5	0	0	0	0	0	0	Fix
ACC Ref=(PAL/NTSC)	0 ~ 40	33	33	39	33	33	33	Fix
ACCR(SECAM)	0 ~ 39	39	39	33	39	39	39	Fix
Gain1(Video)	0 ~ 31	31	31	31	31	31	31	Fix
Delay1(Video)	0 ~ 15	3	3	3	3	3	3	Fix
Velocity Limit	0 ~ 127	127	127	127	127	127	127	Fix
Velocity Delay	0 ~ 15	7	7	7	7	7	7	Fix
Velocity Coring	0 ~ 15	3	3	3	3	3	3	Fix
RGB Shift	0 ~ 255	-	-	-	-	-	-	Fix
HB START	0 ~ 3	121	117	115	117	117	117	Fix
HB STOP	0 ~ 255	173	168	169	168	168	168	Fix
2H CombFilter	0 ~ 1	1	1	1	1	1	1	Fix
NR Off Value	0 ~ 10	0	0	0	0	0	0	Fix
Color hys(SECAM)	0 ~ 255	166	166	166	166	-	-	Fix
Color hys(PAL)	0 ~ 255	200	-	200	200	-	-	Fix

OSD	RANGE	SIM-806EI3		Remarks
		29" Normal	21" Flat	
Peak Threshold	0 ~ 255	255	255	Fix
Soft Limit Slope B	0 ~ 15	4	4	Fix
Hard Limit	0 ~ 4	255	255	Fix
Peak Video Ref	0 ~ 255	0	0	Fix
Peak Video Gain	0 ~ 5	0	0	Fix
ACC Ref=(PAL/NTSC)	0 ~ 40	33	20	Fix
ACCR(SECAM)	0 ~ 39	21	21	Fix
Gain1(Video)	0 ~ 31	11	11	Fix
Delay1(Video)	0 ~ 15	3	3	Fix
Velocity Limit	0 ~ 127	74	74	Fix
Velocity Delay	0 ~ 15	7	7	Fix
Velocity Coring	0 ~ 15	10	10	Fix
RGB Shift		-	-	Fix
RGB START		117	117	Fix
RGB STOP		168	168	Fix
2H Comb Fiter		1	1	Fix
NR Off Value		3	3	Fix
Color hys(SECAM)		-	-	Fix
Color hys(PAL)		-	-	Fix

4-8-2(F) OPTION

No.	OSD	Function
1	System	Select the Broadcasting System - CZ : PAL/SECAM-B/G,D/K,I,L CW : It is added SECAM-L function in CZ
2	AV by CH Key	On : It can select AV Mode for CH key in case that the number of Pannel key is 5. Off : In case that it is AV key in pannel
3	Sound	Select the sound system, for example A2-Stereo/Nicam,V-dolby,Mono, L-StereoIn case of using MSP3411G and V-Dolby MSP3400D/MSP3410, select A2-Stereo/Nicam
4	CRT	Select P-Size Mode
5	AV Mode	Select EXT Jack (RCA/SCARTS-1,2,S-VIDEO,DVD)
6	Speaker	Select the Speaker . If Dome speaker, Select 'Dome Spk'. If Non Dome speaker, select 'Non Dome Spk
7	TTX TOP	Select TOP TTX On/Off
8	X-Ray	Select X-Ray On/Off (On : USA, Of f: Other)
9	Tilt Control	Select Tilt On/Off
10	Auto FM	On : In Nicam Broadcasting Channel, If it happened 'Nicam Ident check bits error'or 'Sound Noise', Set Auto FM Mode. Of f :In Nicam Broadcasting Channel, Keep Nicam Mode till Nicam Ident Check bits are perfectly Off .
11	Text Language	West Europe : English/German/Skandinavian/Italian/French/Spainsh/Czech East Europe : Polish/Czech/Rumanian/Slovenian/Croatian//French/Skandinavian/German/Italian Russian : Russian/Ukranian/Estonian/Czech/German/Lettish/English Greek-Turkey : English/Turkey/Greek/French/Skandinavian/German/Spainsh/Italian/ Arabic : English/Arabic/French Farsi : English/Farsi/French Arab-Hebrew : Arabic/Hebrew
12	AKB	AKB(Auto kined bias) On/Off
13	Language	Select OSD Language Arab : English/Arabic/French/Pakistan≤î Libya : English/French/Libya≤îIran : English/French/Persia≤î/Turkey CIS : English/Russian
14	PIP	Select 1T-PiP, 2T-PIP or PIP Off
15	LNA	If LNA(Low Noise Amplitude) Tuner, Set 'On'. : TCLS
16	Equalizer	Equalizer ON/OFF.
17	High Deviate	On :If it happened 'Sound click' Noise cause that the input signal from TV Station has been over modulated,Set 'ON'. Off : Normal input Signal
18	TTX On/OFF	Select TTX On/Off

Note 6. **Sound IC & System**

Sound	IC601
A2/NICAM	MSP3400D, MSP3410D, MSP3400G
V-DOLBY	MSP3411G
Mono	Not used this mode for KS3A Chassis
L-Stereo	

OSD	INITIAL DATA								
	SIM-806EW1(SEH)			SIM-806EW1(HQ)					
	4:3 WIDE MODEL	28" WIDE Flat	32" WIDE Flat	CW29A7	CZ29A6	CZ29A7	CZ29A6	CZ21A8	CW21A8
System	Option	CW	CW	CW	CZ	CZ	CZ	CZ	CZ
AV by CH Key	On	On	On	Off	Off	Off	Off	Off	On
Sound	Option	V.Dolby	V.Dolby	A2/NICAM	A2/NICAM	A2/NICAM	V.Dolby	A2/NICAM	A2/NICAM
CRT	4:3	Wide	Wide	4:3	4:3	4:3	4:3	4:3	4:3
AV Mode	2Scart	2Scart	2Scart	2Scart	2Scart	2Scart+S	2Scart	2Scart	2Scart
Speaker	Non	Non	Non	Dome spk	Dome spk	Dome spk	Dome spk	Non	Non
TTX TOP	Off	Off	Off	Off	Off	Off	Off	Off	Off
X-Ray	Off	Off	Off	Off	Off	Off	Off	Off	Off
Tilt Control	Off	On	On	On	On	On	On	Off	Off
Auto FM	On	On	On	On	On	On	On	On	On
AKB	On	On	On	On	On	On	On	On	On
Text Language	West	West	West	-	-	-	-	-	-

OSD	SIM-812MA3						
	29A5WT8X	29A6PF8X	29K3WT8X	29A6WT8X	29A6PF8X	29A6PFBX	29A6WT8X
Language	Arab	Iran	CIS	CIS	Arab	Arab	Iran
Sound	V.Dolby	V.Dolby	A2/Nicam	A2/Nicam	V.Dolby	V.Dolby	V.Dolby
CRT	4:3	4:3	4:3	4:3	4:3	4:3	4:3
AV Mode	2RCA+S	2RCA+S	2Scart+S	2Scart+S	2RCA+S	2RCA+S+D	2Scart+S
X-Ray	Off	Off	Off	Off	Off	Off	Off
Tilt Control	On	On	On	On	On	On	On
Auto FM	Off	Off	Off	Off	Off	Off	Off
PIP	Off	2-Tuner	Off	Off	2-Tuner	2-Tuner	Off
Txt Language	Arabic	Farsi	Russian	Russian	Arabic	Arabic	Reek-Turkey
LNA	Off	On	On	On	On	On	Off
Equalizer	On	On	On	On	On	On	On
High Deviate	On	On	Off	Off	On	On	On
TTX On/Off	On	On	On	On	On	On	On
AV by CH Key	On	Off	On	Off	Off	Off	Off

OSD	SIM-812MA3				SIM-806MA3	
	29A5WTBX	29A6PFBX	29A5PF8C	29A6NTBX	34D2GNBX	29A6GWBX
Language	Arab	Iran	Arab	Iran	Iran	Arab
Sound	V.Dolby	V.Dolby	V.Dolby	V.Dolby	A2/Nicam	Virtual Dolby
CRT	4:3	4:3	4:3	4:3	4:3	4:3
AV Mode	2RCA+S+D	2RCA+S+D	2Scart+S	2RCA+S+D	2RCA+D	2RCA+S+D
X-Ray	Off	Off	Off	On	On	Off
Tilt Control	On	On	On	On	Off	On
Auto FM	Off	Off	Off	Off	Off	Off
PIP	Off	2-Tuner	2-Tuner	Off	1-Tuner	1-Tuner
Txt Language	Arabic	Farsi	Arabic	East Euripe	West Europe	Arabic
LNA	Off	On	On	Off	Off	Off
Equalizer	On	On	On	On	On	On
High Deviate	On	On	On	Off	On	On
TTX On/Off	On	On	On	On	Off	On
AV by CH Key	On	Off	On	Off	On	Off

OSD	INITIAL DATA					
	SIM-812EA1					
	29A7NTBX	29A5WBX	29A5NTBX	29K3WTBX	29K3WBX	29A7PFBX
Language	ESASIA	ESASIA	ESASIA	ESASIA	ESASIA	ESASIA
Sound	V.Dolby	V.Dolby	V.Dolby	A2/Nicam	A2/Nicam	V.Dolby
CRT	4:3	4:3	4:3	4:3	4:3	4:3
AV Mode	2RCA+S+D	2RCA+S+D	2RCA+S+D	2RCA+S+D	2RCA+S+D	2RCA+S+D
X-Ray	Off	Off	Off	Off	Off	Off
Tilt Control	On	On	On	On	On	On
Auto FM	Off	Off	Off	Off	Off	Off
PIP	Off	Off	Off	Off	Off	2-Tuner
Txt Language	West	West	West	West	West	West
LNA	Off	Off	Off	Off	Off	On
Equalizer	On	On	On	On	On	On
High Deviate	Off	Off	Off	Off	Off	Off
TTX On/Off	On	Off	On	Off	Off	On
AV by CH Key	Off	On	On	Off	On	Off
AKB	-	-	-	-	-	-

OSD			SIM-812MAD			SIM-806E1
	29A5PFBX	29A6NTBX	29A7PNBX	29A6MT8X	29A5MT8X	29A7PFBX
Language	ESASIA	ESASIA	ESASIA	CIS	CIS	-
Sound	V.Dolby	V.Dolby	V.Dolby	A2/Nicam	A2/Nicam	V.Dolby
CRT	4:3	4:3	4:3	4:3	4:3	4:3
AV Mode	2RCA+S+D	2RCA+S+D	2RCA+S+D	2Scart+S	2Scart+S	2RCA+S+D
X-Ray	Off	Off	Off	Off	Off	Off
Tilt Control	On	On	On	On	On	On
Auto FM	Off	Off	Off	Off	Off	On
PIP	2-Tuner	Off	2-Tuner	2T-D/W	2T-D/W	2-Tuner
Txt Language	West	West	West	Russian	Russian	-
LNA	On	Off	On	On	On	On
Equalizer	On	On	On	On	On	On
High Deviate	Off	Off	Off	Off	Off	On
TTX On/Off	On	On	Off	On	On	-
AV by CH Key	On	Off	On	Off	On	Off
AKB	-	-	-	-	-	On

OSD	SIM-806EI3		OSD	SIM-806EI3	
	29" Normal	21" Flat		29" Normal	21" Flat
Language	-	-	Woofer	On	On
Sound	A2/Nicam	A2/Nicam	Pre Chanlle	On	On
CRT	4:3	4:3	Volume Table	Large	Large
AV Mode	2RCA	2RCA + D	Dynamic Vol	On	ON
X-Ray	Off	Off	Woofer Table	Small	Small
Tilt Control	Off	Off	Amp Mute	Off	Off
Auto FM	On	On			
PIP	2-Tuner	2-Tuner			
Txt Language	-	-			
LNA	On	On			
Equalizer	On	On			
High Deviate	On	On			
TTX On/Off	-	-			
AV by CH Key	On	On			
AKB	Off	On			

4-8-2(G) G2-ADJUST

No.	OSD	Function	Remark
1	MRCR	Measurement Result Resisters; Cutoff/Leakage Red	Measure data
2	MRCG	Measurement Result Resisters; Cutoff/Leakage Green	Measure data
3	MRCB	Measurement Result Resisters; Cutoff/Leakage Blue	Measure data
4	MRWDG	Measurement Result Resisters; White Drive	Measure data
5	IBRM	Internal Brightness, Measurement (0 .. 511), the center value is 256, the brightness for measurement can be set to measure at higher cutoff current. The measurement brightness is independent of the drive values."	G2 Voltage of CRT
6	WDRV	White Drive Measurement Control; RGB Values for White Drive Beam Current Measurement	Fix
7	CDL	Cathode Drive Level Uses the same register as the RGB drive in Video adjust-1.	Fix
8	COL(G)	Cutoff Level Red Uses the same register as the RED cutoff in Video adjust-1.	Fix
9	COL(G)	Cutoff Level GreenUses the same register as the GREEN cutoff in Video adjust-1.	Fix
10	COL(B)	Cutoff Level BlueUses the same register as the BLUE cutoff in Video adjust-1.	Fix

After setting COL/CDL/WDRV/IBRM to each spec of models, adjust the screen VR till the color of MRCR/MRCG/MRCB/MRWDG becomes green

OSD	RANGE	INITIAL DATA									Remarks
		SIM-806EW1(SEH)									
		21" 4:3 SED AK	21" 4:3 Tho AK	25" 4:3 SED AK	25" 4:3 Tho AK	28" 4:3 Tho Ak	29" 4:3 SED Flat	24" WIDE Phi Ak	24" WIDE Tho Invar	28" WIDE Tho Ak	
MRCR	0 ~ 255	-	-	-	-	-	-	-	-	-	Measure data
MRCG	0 ~ 255	-	-	-	-	-	-	-	-	-	Measure data
MRCB	0 ~ 255	-	-	-	-	-	-	-	-	-	Measure data
MRWDG	0 ~ 255	-	-	-	-	-	-	-	-	-	Measure data
IBRM	0 ~ 255	208	198	207	208	197	208	197	204	214	G2 Vlotage of CRT
WDRV	0 ~ 255	117	120	108	114	105	42	124	118	98	Fix
CDL	0 ~ 255	166	140	188	160	149	230	140	150	148	Fix
COL(R)	0 ~ 255	76	125	115	152	100	160	88	176	215	Fix
COL(G)	0 ~ 255	76	125	115	152	100	160	88	176	215	Fix
COL(B)	0 ~ 255	76	125	115	152	100	160	88	176	215	Fix

OSD	RANGE	SIM-806EW1(SEH)					SIM-806EW1(HQ)				Remarks
		28" WIDE Tho Invar	32" WIDE Tho Invar	28" WIDE SED Flat	32" WIDE Pin Flat	32" WIDE Tho Flat	29" Flat	21" Flat	25" Flat	LG Pin Free Set	
MRCR	-	-	-	-	-	-	-	-	-	-	Measure data
MRCG	-	-	-	-	-	-	-	-	-	-	Measure data
MRCB	-	-	-	-	-	-	-	-	-	-	Measure data
MRWDG	-	-	-	-	-	-	-	-	-	-	Measure data
IBRM	0 ~ 255	211	211	205	200	230	220	220	220	240	G2 Vlotage of CRT
WDRV	0 ~ 255	105	93	43	95	88	40	35	40	55	Fix
CDL	0 ~ 255	200	250	197	210	233	210	165	200	255	Fix
COL(R)	0 ~ 255	180	180	142	125	198	150	70	150	160	Fix
COL(G)	0 ~ 255	180	180	152	125	198	150	70	150	160	Fix
COL(B)	0 ~ 255	180	180	197	125	198	150	70	150	160	Fix

OSD	RANGE	SIM-812MA3			SIM-812MAD	SIM-806MA3		SIM-812EA1	SIM-806EI1	SIM-806EI3		Remarks
		29" Flat	CIS 29" Flat	CIS 29" Flat SKD CKD	29" Flat	29" Flat	34" Flat	29" Flat	29" Flat	29" Normal	21" Flat	
MRCR	0 ~ 255	-	-	-	-	-	-	-	-	-	-	Measure data
MRCG	0 ~ 255	-	-	-	-	-	-	-	-	-	-	Measure data
MRCB	0 ~ 255	-	-	-	-	-	-	-	-	-	-	Measure data
MRWDG	0 ~ 255	-	-	-	-	-	-	-	-	-	-	Measure data
IBRM	0 ~ 255	220	220	220	220	200	220	220	220	220	225	G2 Vlotage of CRT
WDRV	0 ~ 255	35	35	35	35	35	3	35	35	35	45	Fix
CDL	0 ~ 255	220	220	220	220	160	220	220	220	205	150	Fix
COL(R)	0 ~ 255	150	150	150	150	200	150	150	150	120	150	Fix
COL(G)	0 ~ 255	150	150	150	150	200	150	150	150	120	150	Fix
COL(B)	0 ~ 255	150	150	150	150	200	150	150	150	120	150	Fix

After setting COL/CDL/WDRV/IBRM to each spec of models, adjust the screen VR till the color of MRCR/MRCG/MRCB/MRWDG becomes green

4-8-2(H) OTHERS

No.	OSD	Function
1	VSU	Vertical Setup Time. Delays the vertical sync to solve the jitter of OSD and TTX . Check OSD while varying 96 ~ 111 step by step and an 1H line moves at two points. If the value is set at the first point or second point, an OSD jitter may happen. Also, if the value is set between the first andsecond points, a TTX jitter may happen. So, the value of VSU should be set after giving some magines (three steps).
2	H QEW	Short for Q-CRT HORIZNOTAL EAST WEST,data used only for Q-CRT MODEL. In NORMAL mode, the horizontal picture size is within 5 ~ 5.5. In Q mode, the horizontal picture size is within 6.5 ~ 7. This H QEW function sets the gap between horizontal picture size in NORMAL mode and horizontal picture size in Q mode.
3	H ZOOM PARABOLA	In ZOOM mode of P-SIZE, Adjusts vertical linearity. Each CRT has a different data. (Refer 'other' data)
4	H 16:9 PARABOLA	In 16:9 mode of P-SIZE, Adjusts vertical linearity. Each CRT has a different data. (Refer 'other' data)
5	TTX H SHIFT	Adjusts TTX horizontal position
6	MONO SOUND SYSTEM	NOT USED, KS3A chassis has no function of Mono sound system.
7	V SLICE LEVEL	Allows the sync slice level of sync separate block to be changed. This item corresponds the case where a vertical bouncing happens according to signal conditions by area. (overmodulation, especially). 0: 100% 1: 90% 2: 75% 3: 60%
8	MELODY VOLUME	Sets the level of melody volume in Picture ON. It is managed differently according to buyer or area.
9	AKB	Short for Auto Kined Bias, a function that maintains uniformity inbrightness and white balance by automatically correction the variance of brightness and white balance according to temperature and characteristics of AMP in the CRT drive
10	TTX LIST PRIOR	TTX mode has two different types; List and FLOF. When swtiching into the TTX mode, this function determines which type has priorty. On : Australia Off : others country
11	MAIN NEWLIN	Controls the picture compressing rate.
12	Main PFGHB	Controls the horizontal blanking when the picture size compressed.
13	PIP BLKLR	PIP blanking level red(PIP low light white balance). Adjust low light white balance of PIP.
14	PIP BLKLB	PIP blanking level blue(PIP low light white balance). Adjust low light white balance of PIP.
15	PIP PKLR	PIP peak white level Red. Adjusts high lignt white balance of PIP.
16	PIP PKLG	PIP peak white level Green. Adjusts high lignt white balance of PIP.
17	PIP PKLB	PIP peak white level Blue. Adjusts high lignt white balance of PIP.

SIM-806EW doesn't have this function

OSD	RANGE	INITIAL DATA						Remarks
		SIM-812MA3		SIM-812MAD	SIM-806MA3		SIM-812EA1	
		29" Flat	29" Flat DVD	CS29A6MT	34" Flat	29" Flat	Southeast Asia 29" Flat DVD	
VSU	96 ~111	100	100	100	102	100	100	Fix
H QEW	-30 ~ 30	0	0	0	0	0	0	Fix
H ZOOM Parabola	-30 ~ 30	8	13	13	13	13	13	Fix
H 16:9 Parabola	-30 ~ 30	-15	-17	-20	-17	-17	-17	Fix
TTX H Shift	-30 ~ 30	6	6	6	6	6	6	Fix
Mono sound system	BG	BG	BG	BG	BG	BG	BG	Fix
V Slice Level	0 ~ 3	2	2	2	3	2	2	Fix
Melody Volume	0 ~ 20	8	8	8	10	8	8	Fix
AKB	On/Off	On	On	On	Off	On	On	Fix
TTX List Prior	On/Off	-	-	-	-	-	On	Fix
Main Newlin	40 ~ 100	-	-	87	-	-	-	Fix
Main PFGHB	146 ~ 206	-	-	190	-	-	-	Fix
PIP BLKLR	0 ~ 15	-	-	5	-	-	-	Fix
PIP BLKLB	0 ~ 15	-	-	5	-	-	-	Fix
PIP PKLR	155 ~ 255	-	-	255	-	-	-	Fix
PIP PKLG	155 ~ 255	-	-	255	-	-	-	Fix
PIP PKLB	155 ~ 255	-	-	255	-	-	-	Fix

OSD	RANGE	SIM-812EA1		SIM-806EI1	SIM-806EI3		Remarks
		Australia, Newzealand 29" Flat dvd	Thailand 29" Flat DVD	India 29" Flat DVD	29" Normal	21" Flat	
VSU	96 ~111	100	100	100	108	108	Fix
H QEW	-30 ~ 30	0	0	0	0	0	Fix
H ZOOM Parabola	-30 ~ 30	13	13	13	0	8	Fix
H 16:9 Parabola	-30 ~ 30	-17	-17	-20	-10	-18	Fix
TTX H Shift	-30 ~ 30	6	6	10	0	0	Fix
Mono sound system	BG	BG	BG	M	BG	BG	Fix
V Slice Level	0 ~ 3	2	3	2	2	2	Fix
Melody Volume	0 ~ 20	8	10	8	15	15	Fix
AKB	On/Off	On	On	-	-	-	Fix
TTX List Prior	On/Off	Off	On	-	-	-	Fix
Main Newlin	40 ~ 100	-	-	-	-	-	Fix
Main PFGHB	146 ~ 206	-	-	-	-	-	Fix
PIP BLKLR	0 ~ 15	-	-	-	-	-	Fix
PIP BLKLB	0 ~ 15	-	-	-	-	-	Fix
PIP PKLR	155 ~ 255	-	-	-	-	-	Fix
PIP PKLG	155 ~ 255	-	-	-	-	-	Fix
PIP PKLB	155 ~ 255	-	-	-	-	-	Fix

4-8-2(I) Y-ADD

No.	OSD	Function
1	H-BOW	Horizontal bow control (Refer to bottom picture) actually no active function.
2	H-ANGLE	Horizontal angle control (Refer to bottom picture) actually no active function.
3	H-DSCC	Discharge sample counter for deflection retrace.
4	DVD TINT CONTROL	Determines whether DVD SUB TINT control is used. VDP3130Y B1 is set to '1' and B2 is set to '0'.
5	DVD SUB TINT	Adjusts the color phase in the Picture standard mode and receives a NTSC DVD signal.
6	EHT OFFSET	EHT Compensation east/west offset coefficent (Not used)
7	EHT HORIZONTAL	EHT Compensation east/west gain coefficent (Not used)
8	VDPY B2 Version	Selects the VDP3130Y IC version. B2 version is set 'ON,' but B1 version is set 'OFF.

①H-BOW



②H-ANGLE



SIM-806EW doesn't have this function

OSD	INITIAL DATA										Remarks
	SIM-812MA3	SIM-812MAD		SIM-806MA3		SIM-812EA1		SIM-806EI1	SIM-806EI3		
	29" Flat	29" Flat DVD	CS29A6MT	34" Flat	29" Flat	29" Flat DVD (VDP3130Y B1)	29" Flat DVD (VDP3130Y B2)	India 29" Flat DVD	29" Normal	21" Flat	
H-BOW	0	0	0	0	0	0	0	0	0	0	Fix
H-ANGLE	0	0	0	0	0	0	0	0	0	0	Fix
H-DSCC	3	3	3	3	3	3	3	3	3	2	Fix
DVD TINT CONTROL	1	1	1	1	1	1	0	0	0	0	Fix
DVD SUB TINT	25	25	25	25	25	25	25	25	60	60	Fix
EHT OFFSET	0	0	0	0	0	0	0	0	0	0	Fix
EHT HORIZONTAL	0	0	0	0	0	0	0	0	0	0	Fix
VDPY 32 Version	Off	On	Off	Off	Off	Off	On	On	On	On	Fix

4-9 MICOM

4-9-1 Pin Layout

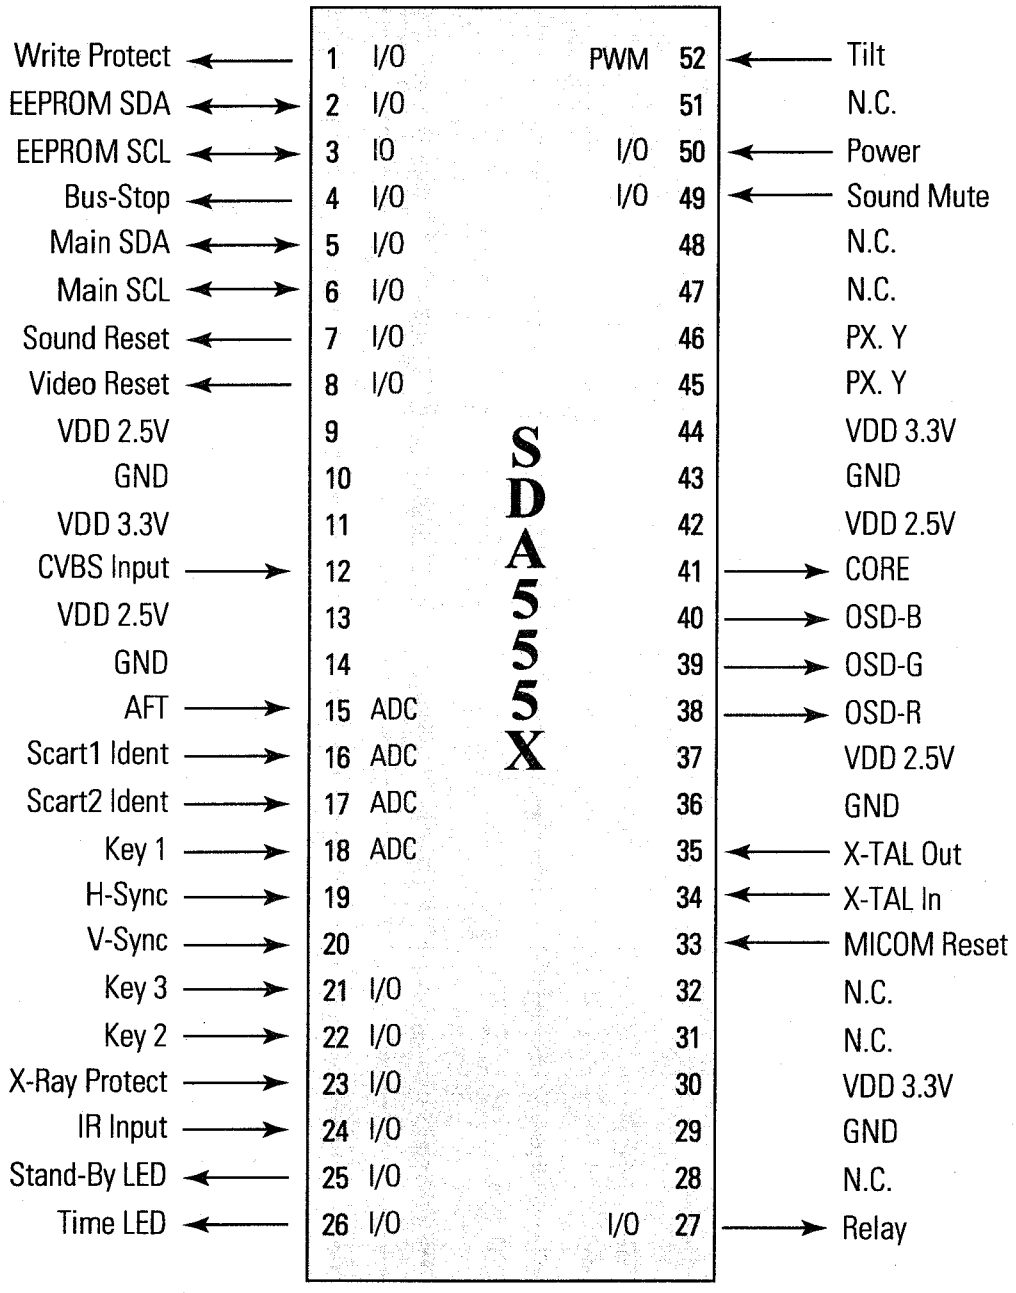

4-9-2 Pin Assignment Specification

PIN NO	FUNCTION	ASSIGN	IN/OUT	ACTIVE H/L	DESCRIPTION
1	I/O	Write Protect	Out	Low	EEPROM Write Protection
2	I/O	ROM SDA	I/O		EEPROM Serial Data Line
3	I/O	ROM SCL	I/O		EEPROM Serial Clock Line
4	I/O	Bus Stop	In	Low	Disable Micom IIC
5	I/O	Main SDA	I/O		Peripheral IC Serial Data Line
6	I/O	Main SCL	I/O	Low	Peripheral IC Serial Clock Line
7	I/O	Sound Reset	Out	Low	MSP IC Initial Control
8	I/O	Video Reset	Out		VDP IC Initial Control
9	Vdd	VDD 2.5V			
10	GND				
11	Vdd	VDD 3.3V			
12	CVBS	CVBS Input	In		TTX CVBS Input
13	Vdd	VDD 2.5V			Analog B+
14	GND				Analog Ground
15	ADC	AFT	In		Auto Fine Tuning Control
16	ADC	SC1-ID	In		Scart1 Ident
17	ADC	SC2-ID	In		Scart2 Ident
18	ADC	Key1	In		Key1 Input
19	HS	H-Sync	In		Horizontal Sync Input
20	VS	V-Sync	In		Vertical Sync Input
21	I/O	Key3	In		Key3 Input
22	I/O	Key2	In		Key2 Input
23	I/O	X-Ray	In		X-Ray Protection
24	I/O	IR-In	In		Remocon Signal Input
25	I/O	STD-LED	Out		LED Drive Output(Red)
26	I/O	TIM-LED	Out		LED Drive Output(Green)

4-9-2 Pin Assignment Specification (Continued)

PIN NO	FUNCTION	ASSIGN	IN/OUT	ACTIVE H/L	DESCRIPTION
27	I/O	Relay	Out	Low	Activate Degausssing Coil
28	N.C.				Not Used (Programmed Gound Level)
29	GND				Analog Ground
30	Vdd	VDD 3.3V			Not Used (Programmed Gound Level)
31	N.C.				Not Used (Programmed Gound Level)
32	N.C.				Micom Hardware Reset
33	Reset	Reset	In	Low	Crystal Oscillation Input
34	X-In	X-TAL In	In	6MHz	Crystal Oscillation Output
35	X-Out	X-TAL Out	Out	6MHz	Analog Ground
36	GND				Analog B+
37	Vdd	VDD 2.5V			OSD/TTX Output (Red)
38	R	OSD-R	Out		OSD/TTX Output (Green)
39	G	OSD-G	Out		OSD/TTX Output (Blue)
40	B	OSD-B	Out		Fast Blank/Half Contrast Output
41	COR	CORE	Out		
42	Vdd	VDD 2.5V			
43	GND				
44	Vdd	VDD 3.3V			
45	I/O	PX.Y	In		When The Caption Function Adopted, Used.
46	I/O	PX.Y	Out		
47	N.C.				Not Used (Programmed Gound Level)
48	N.C.				
49	I/O	S-Mute	Out	High	Sound Amp Mute
50	I/O	Power	Out	Low	Picture On/Off Control
51	N.C.				Not Used (Programmed Gound Level)
52	I/O	Tilt	Out	PWM	Tilt Control Output

5. Troubleshooting

5-1 No Power

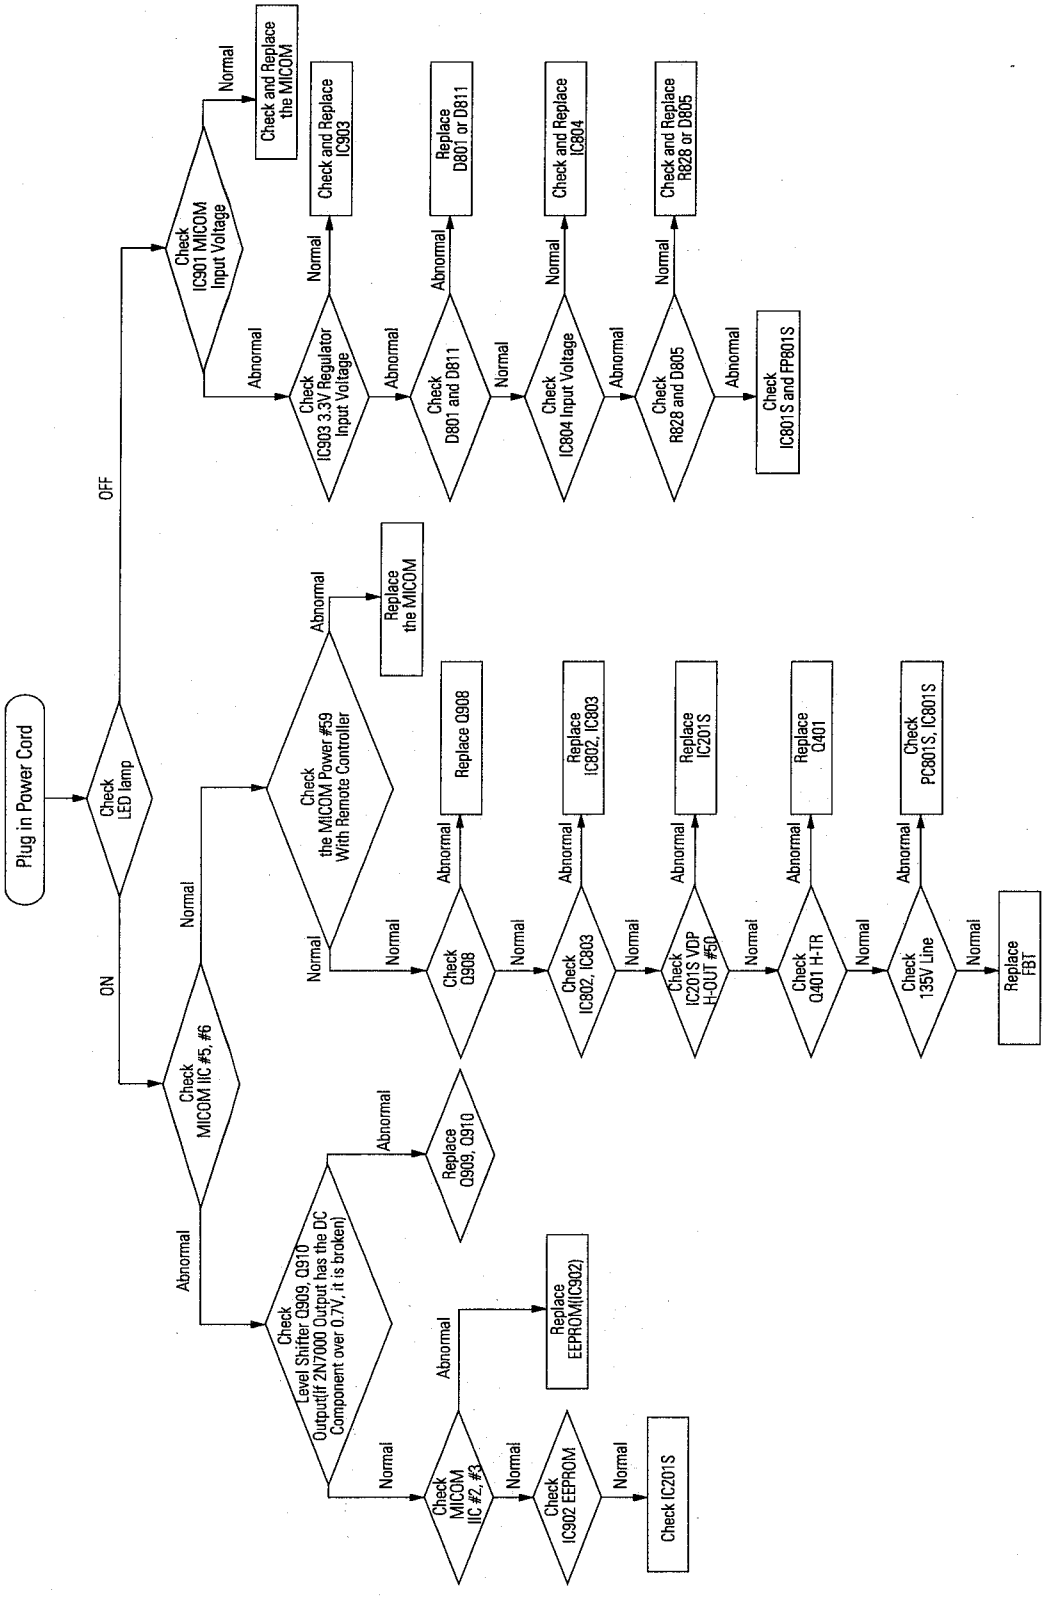

Note : When you check whether any component is normal, you must let the output pin be open in order not to be affected by the side of output.

5-2 No Picture

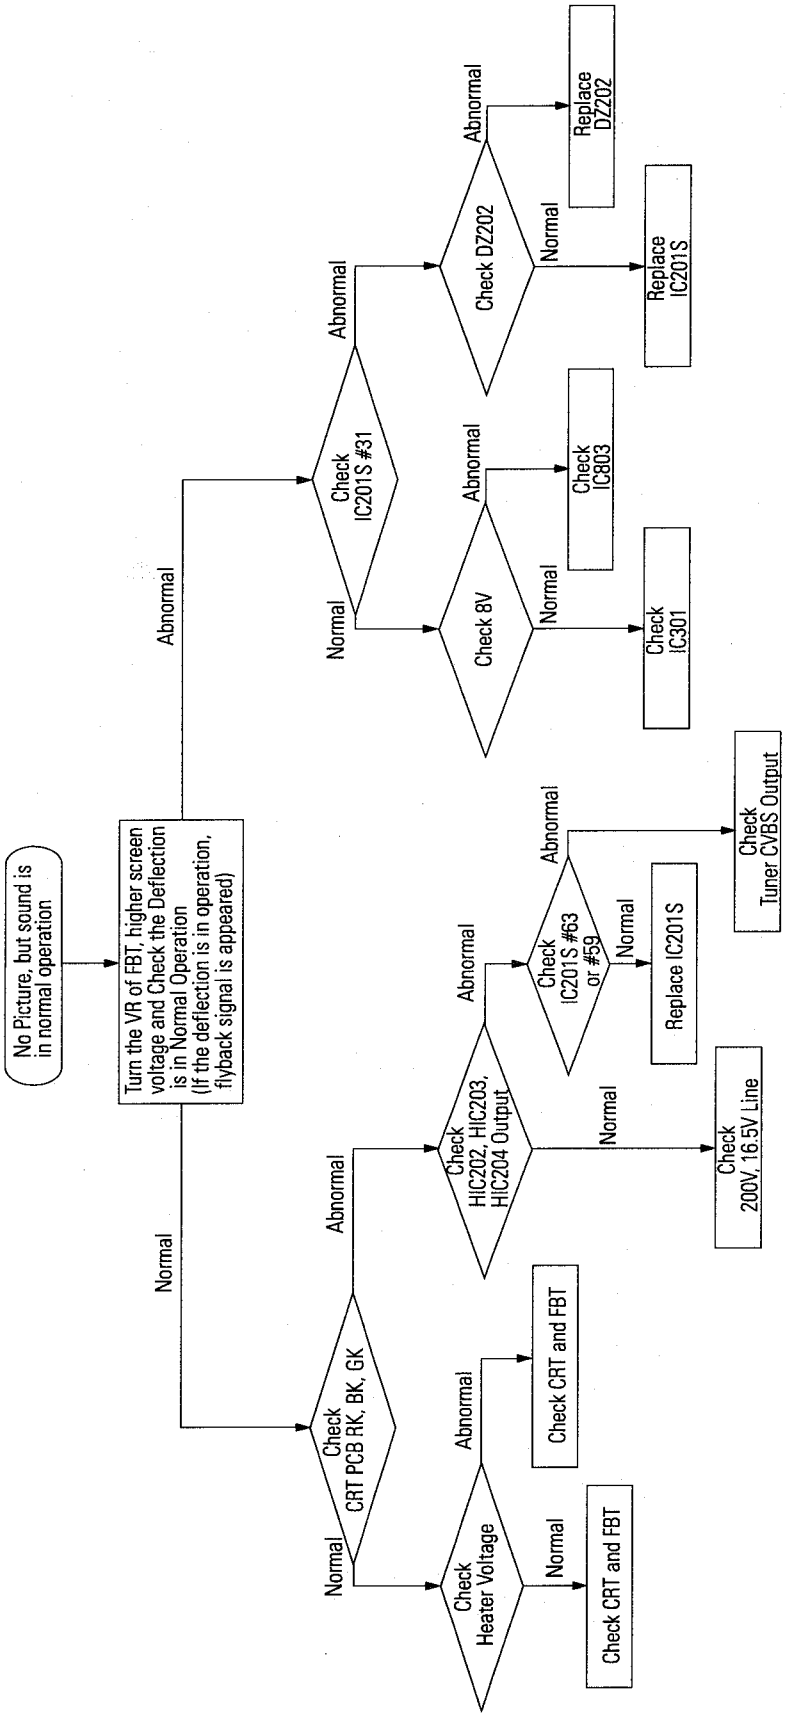

5-3 No Sound

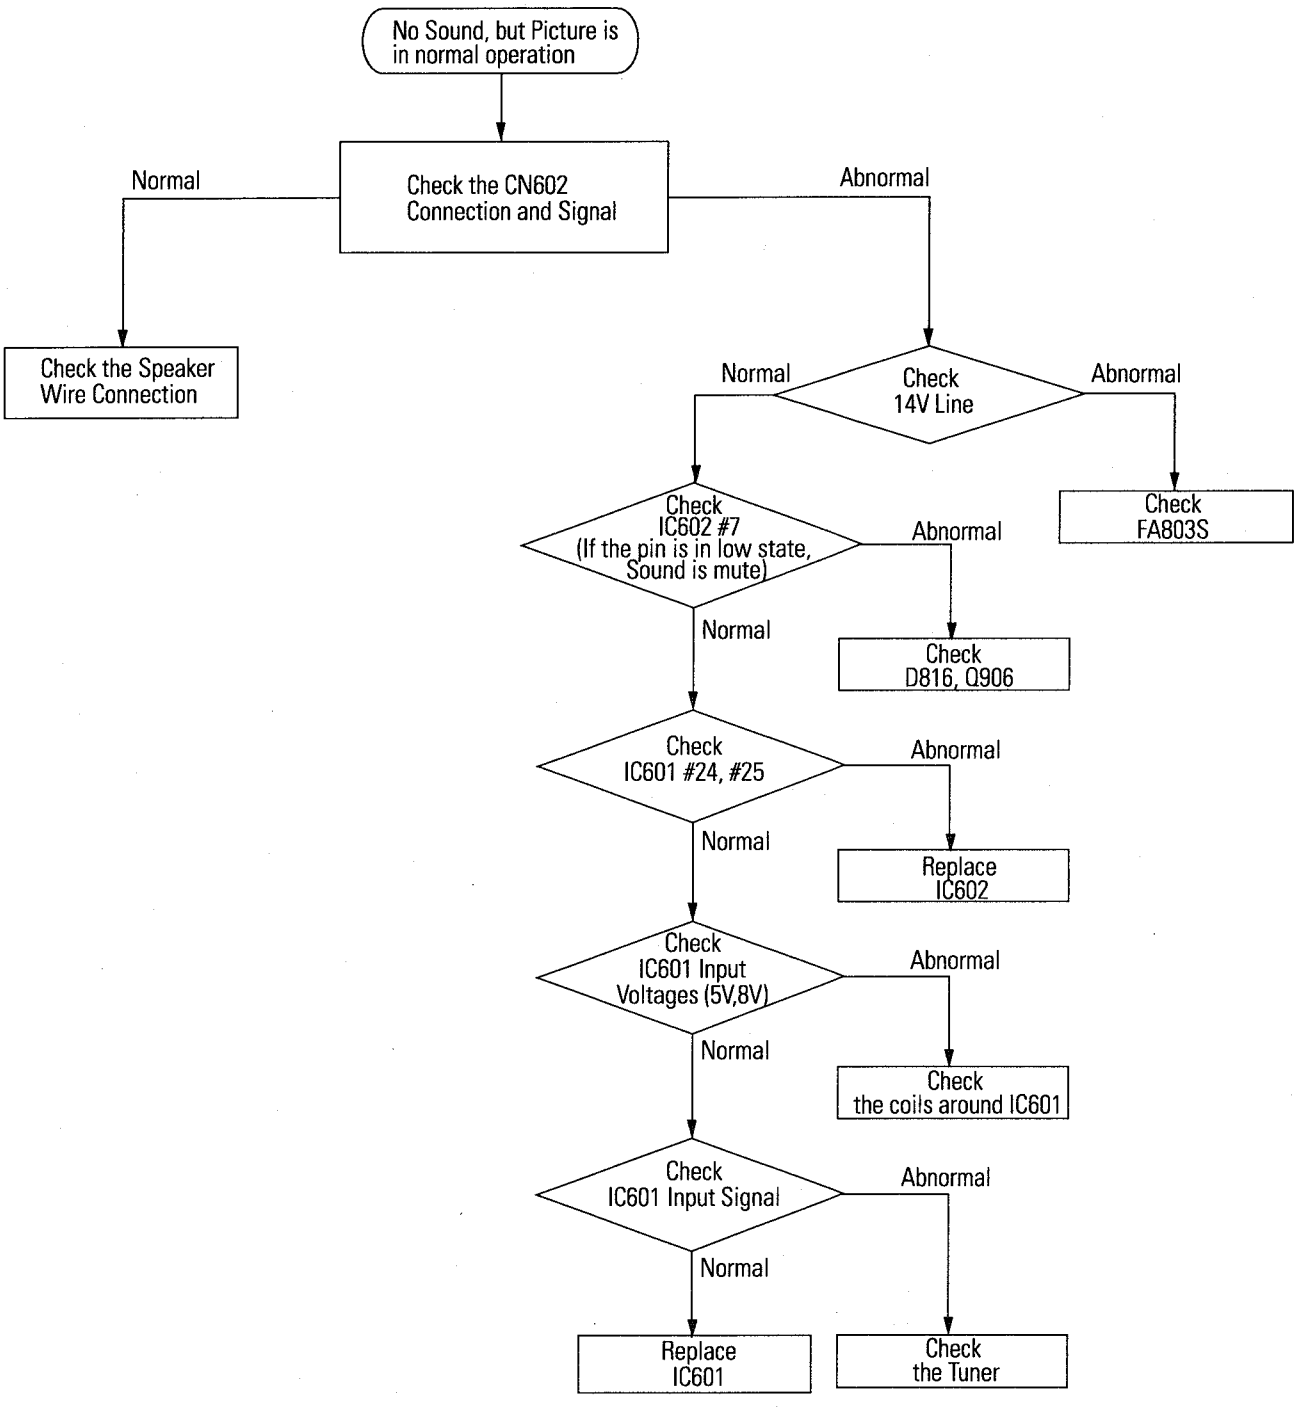
No Sound, but Picture is in normal operation
Check the CN602 Connection and Signal
Normal
Abnormal
Check the Speaker Wire Connection
Check 14V Line
Normal
Abnormal
Check FA803S
Check IC602 #7 (If the pin is in low state, Sound is mute)
Abnormal
Check D816, Q906
Normal
Check IC601 #24, #25
Abnormal
Replace IC602
Normal
Check IC601 Input Voltages (5V,8V)
Abnormal
Check the coils around IC601
Normal
Check IC601 Input Signal
Abnormal
Check the Tuner
Normal
Replace IC601

MEMO

6. Exploded View & Parts List

6-1 CW29A8VDE8XXEC

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

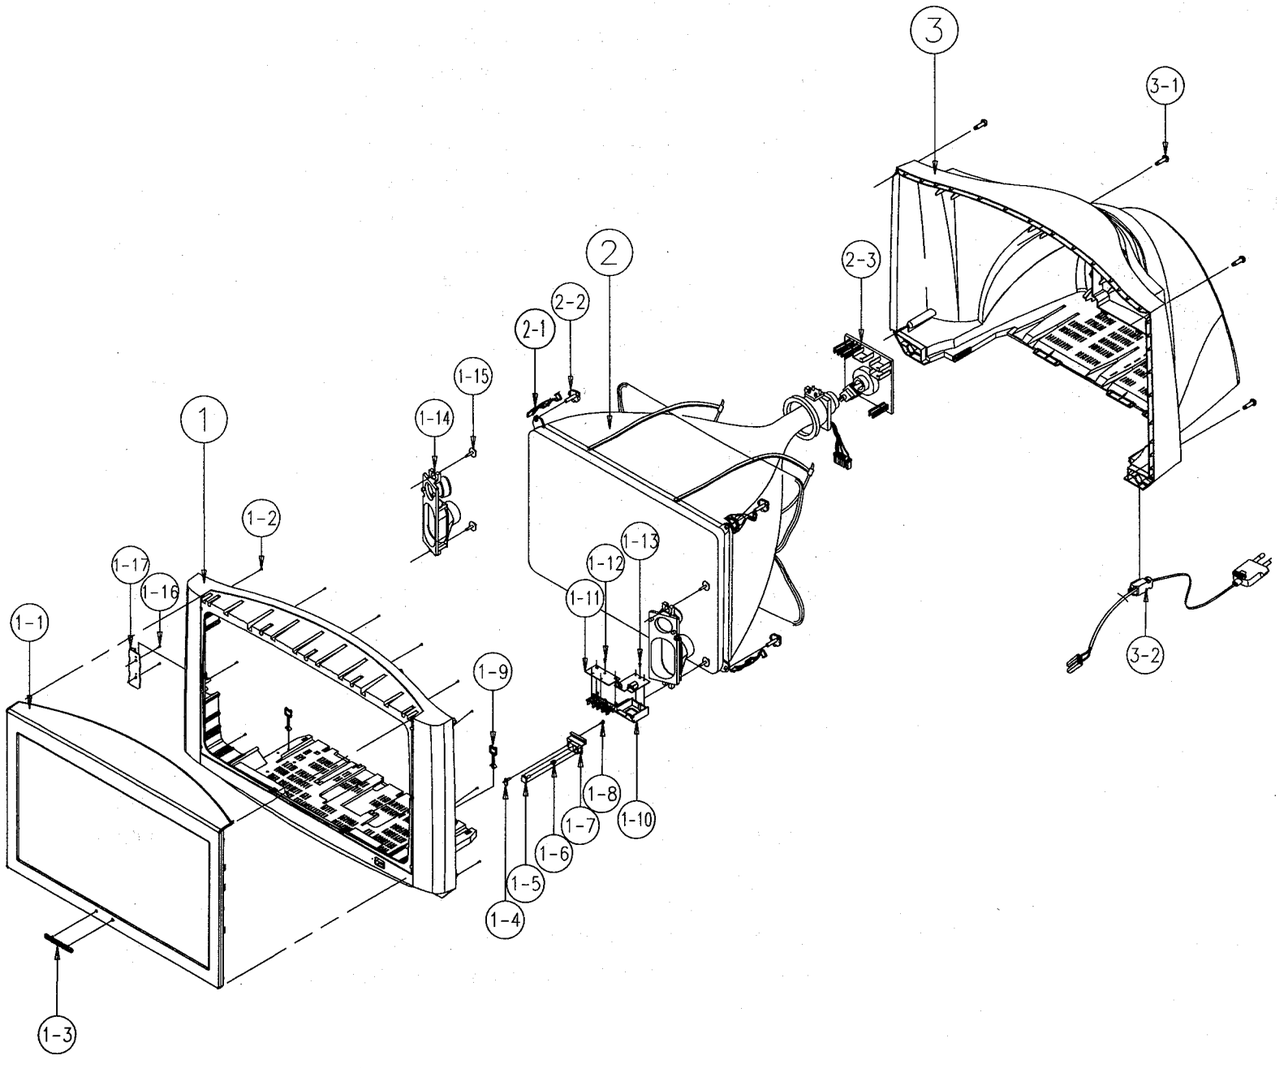

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1	HA91-00882H	ASSY CABINET FRONT;,29A8D,PLANO,COR-PROT	1		
1*	AA64-02435B	CABINET-FRONT;29A8,HIPS,HB,SV-907P,GRY,C	1		
1-1	HA64-00006B	CABINET-MASK;;29A8,PLANO,HIPS,HB,DB-004P	1		
1-2	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	12	CF+CM	
1-3	AA64-01062A	BADGE-BRAND;32W8,AL FORGING,-,-,L65,-,SI	1		
1-4	HA64-00916B	INDICATOR-LED;32W8,ACRYL,-,CLR,-,-,-,	1		
1-5	AA64-02505A	KNOB POWER;32W8,HIPS,HB,BLK	1		
1-6	AA61-60003T	SPRING ETC-CS;-,SUS304,-,-,OD7,N5,OD7,-,	1		
1-7	HA64-00915B	WINDOW-REMOCON;32W8,PC,-,-,-,-VIOLET,-	1		
1-8	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	1	WR+CF	
1-9	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	2		
1-10	HA64-02497A	KNOB CONTROL;;32W8,HIPS,HB,GRY	1		
1-11	AA41-00284C	PCB-CONTROL;CW32W8,FR-1,1L,C,1.6T,245X24	1	PCB	
1-12	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	2	KC+PCB	
1-13	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	2	CF+KC	
1-14	AA91-00150B	ASSY HOLDER SPK;DP,-,8OHM/15W,-,AA91-001	1		
1-15	AA60-10050A	SCREW-ASSY;-,SWRCH18A,M4,L25,RH,+,WP,-,Z	4	CF+SPK	
1-16	6003-001135	SCREW-TAPTITE;TH,+,B,M4.0,L15,BLK,SWRCH1	2	CF+AV	
1-17	AA95-01521A	ASSY ETC-PCB A/V BOARD;,28W8,29A8,KS3A,5	1		
2	AA94-05795A	ASSY CRT;A68QCP891X307,+400MG,29,ITC,2	1		
2-1	AA65-30113A	CLAMPER CORE-D,COIL;-,NYLON 66,V2,-,BLK,	4		
2-2	AA60-10050V	SCREW-ASSY;-,SWRCH18A,M6,L30,HH,+,WC,-,Z	4	CRT+CF	
2-3	3704-000114	SOCKET-CRT;14P,29.1,35.5,SN,ISH09S/BK	1	VA999	
3	HA64-02446C	CABINET BACK;29A8,VL-1823,GRY	1		
3-1	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	8	CB+CF	
3-2	AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25	1		

6-2 WS28V63NS8XXEC(32V6)

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

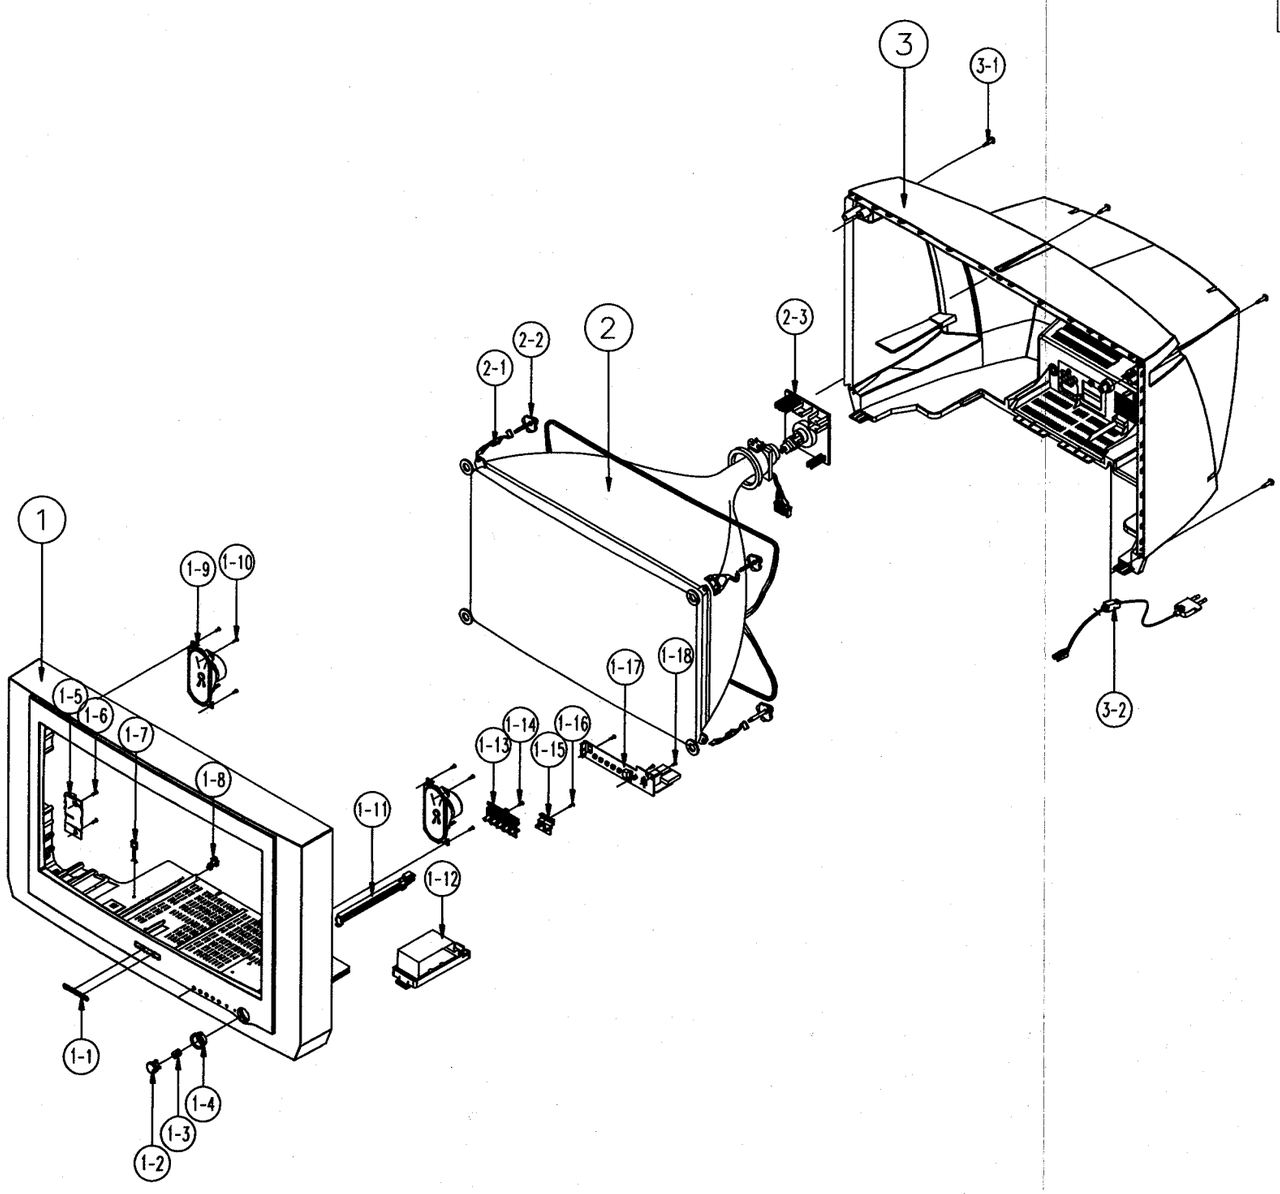

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1	AA96-01298A	ASSY COVER P-FRONT;28V6,HIPS HB,SILVER	1		
1*	AA64-03140A	CABINET-FRONT;28V6 SEH,HIPS,HB,G4309,SV0	1		
1-1	AA64-70117B	BADGE-BRAND;-,AL,-,-,L65,R2000,SILVER,SS	1		
1-2	AA64-03143A	KNOB-POWER;28V6 SEH,ABS,HB,G3676,SVM3012	1		
1-3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	1		
1-4	AA64-03145A	DECORATION-POWER;28V6 SEH,ABS,HB,G3676,S	1		
1-5	AA95-01518A	ASSY ETC-PCB A/V BOARD;,29K8,KS3A,50HZ	1		
1-6	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	2	CF+PCB	
1-7	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	2		
1-8	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	1		
1-9	3001-001005	SPEAKER;10W,8OHM,91DB,140HZ	2		
1-10	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	8	CF+SPK	
1-11	HA61-00711C	HOLDER-PCB;29K8,HIPS,HB,GRY	1		
1-12	HA94-05786B	ASSYPCB-PFC;28W8/Z4-29A8/K8,50HZ,5786A	1		
1-13	AA64-03142A	KNOB-CONTROL;28V6 SEH,ABS,HB,G3676,SVM30	1		
1-14	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	1	CF+KC	
1-15	AA64-03144A	WINDOW-RMC,LED;28V6 SEH,PC,CLR	1		
1-16	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	1	CF+WR	
1-17	AA94-12332A	ASSY PCB MISC-CONTROL;28V6,KS3A,PAL	1		
1-18		SCREW-TAPTITE;	3		
2	HA94-01652A	ASSY CRT;-,-,28,ITC,W66EJU023X215,NON-	1		
2-1		CLAMPER CORE-D,COIL;	4		
2-2	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-	4	CRT+CF	
2-3	3704-000114	SOCKET-CRT;14P,29.1,35.5,SN,ISH09S/BK	1	VA999	
3	HA64-02530C	CABINET-BACK;28M6,VL-1823,GRY	1		
3-1	6003-001025	SCREW-TAPTITE;RH,+,B,M4,L20,ZPC(BLK),SWR	7	CF+CB	
3-2	AA96-01126B	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C40	1		

7. Electrical Parts List

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

7-1 CW29A8VDE8XXEC

Level	Loc. No.	Code No.	Description ; Specification	Remark
			ASSY PCB MAIN(OPT)	
1		AA94-05718B	ASSY PCB MAIN(OPT);CW29A8D,KS3A/H,SEB,IN	
2	C815	2401-003602	C-AL;220uF,20%,160V,GP,BK,22x25mm,1	
2	CN501	3711-002641	CONNECTOR-HEADER;BOX,10P,1R,2.54mm,STRAI	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
2	IC301	HA96-50406B	ASSY-H/S;ASSY-H/S;-,AA62-30180B,LA7845	
3		1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
3		AA62-30180B	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,70MM,-,	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC401	1202-000103	IC-VOLTAGE COMP.;393,DIP,8P,300MIL,DUAL,	
⚠ 2	IC801S	HA96-50371C	ASSY H/S;-,-,AA62-30181H,KA3A1265R,-	
3		AA13-00101A	IC HYBRID;KA3S1265RD,CN5039,5PIN,-50TO12	
3		AA61-10386A	BRACKET-IC;-,SECC 100,T1.0,-,-,-,KA2S068	
3		AA62-30197D	HEAT SINK-ES;DP,-,-,-,AA62-30181H,-,-,-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	JA701	3722-000195	JACK-SCART;42P,-,SN,BLK,NO	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	PC801S	0604-001038	PHOTO-COUPLER;TR,130-260%,200mW,DIP-4,ST	
⚠ 2	PT801S	1404-001156	THERMISTOR-PTC;9OHM,+30%/-20%,220VRMS,27	
⚠ 2	T444S	AA26-00145A	TRANS FBT;1372.0076B,CT29A5P,3.5MH,135V	
2	HC801	HA96-00274A	ASSY-H/S;-,COMPLEX,AA62-00053A,FMLG12S	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00053A	HEAT SINK-PS;-,-,-,SILVER,HOLE 22mm,ALL,	
⚠ 3	D802	0402-001230	DIODE-RECTIFIER;FMG-G2CS,1000V,3A,TO-220	
⚠ 3	D805	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	D806	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	D807	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	IC802	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	HC401	HA96-00275A	ASSY-H/S;-,COMPLEX,AA62-00051A,KSD5703,	
3		AA62-00051A	HEAT SINK-PS;-,-,-,SILVER,HOLE 31mm,ALL,	
⚠ 3	D414	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
3	Q401	0502-001136	TR-POWER;KSD5703,NPN,70W,TO-3PF,ST,8-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	D801S	0402-001399	DIODE-BRIDGE;GSIB660,600V,6A,SIP-4,BK	
2	IC602	HA96-50369B	ASSY-H/S;-,-,AA62-30181F,TDA7297,-	
3		1201-001064	IC-POWER AMP;7297,ZIP,15P,-,DUAL,32dB,PL	
3		AA62-30181F	HEAT SINK-ES;-,AL6063 EXTR.,2,WHT,50MM,-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	IC902	1103-001171	IC-EEPROM;L51DC,16KBit,DIP,8P,300MIL,10m	
2	C105	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C101	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C103	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C228	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C230	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C809	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C810	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C811	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C202	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C205	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C920	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C231	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C215	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C630	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C631	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C645	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C652	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C603	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C708	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C214	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C216	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C605	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C620	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C635	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C646	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C829	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C837	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C839	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C916	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C308	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C914	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C831	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C825	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C217	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C636	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C905	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C607	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C608	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C903	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C211	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C212	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C213	2301-000247	C-FILM,PEF;33nF,5%,50V,TP,8.1x4.5x13mm,5	
2	C218	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C219	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C220	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C221	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C222	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C223	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C901	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C921	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C922	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C919	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C924	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C233	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C234	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C235	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C907	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C909	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C237	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C841	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C201	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C303	2201-002031	C-CERAMIC,DISC;0.005NF,0.5PF,50V,C0G,TP,	
2	C224	2201-002031	C-CERAMIC,DISC;0.005NF,0.5PF,50V,C0G,TP,	
2	C225	2201-002031	C-CERAMIC,DISC;0.005NF,0.5PF,50V,C0G,TP,	
2	C304	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C305	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
2	C821	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C902	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C302	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C401	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C403	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C421	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C402	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
2	C404	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
2	C408	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C414	2401-002597	C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
2	C418	2401-002597	C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
2	C422	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
2	C424	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
2	C601	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
2	C610	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C611	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C415	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C612	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C613	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C617	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C917	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C413	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C622	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C625	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C626	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C628	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C623	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C624	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C627	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C629	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C642	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C644	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C701	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C638	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C639	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C249	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C632	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
2	C634	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C826	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C832	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C838	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C637	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C640	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C641	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C643	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C912	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C647	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
2	C649	2301-000108	C-FILM,PEF;1.5nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C804	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
2	C805	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
2	C807	2301-001397	C-FILM,PPF;2.2nF,5%,1.2kV,TP,15x8.5x13.5	
2	C814	2201-000406	C-CERAMIC,DISC;0.27NF,10%,2KV,Y5P,TP,6.3	
2	C817	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C819	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C822	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C419	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C818	2401-000722	C-AL;2200uF,20%,25V,WT,TP,16x25,7.5	
2	C910	2201-000980	C-CERAMIC,DISC;0.03NF,5%,50V,C0G,TP,5X3M	
2	C911	2201-000980	C-CERAMIC,DISC;0.03NF,5%,50V,C0G,TP,5X3M	
2	C913	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C915	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C918	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C210	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D202	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D207	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D208	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D209	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D210	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D211	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D602	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D804	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DZ402	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D906	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D405	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D408	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D411	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D803	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D816	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
⚠ 2	D404	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
⚠ 2	D402	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
⚠ 2	D403	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D406	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D810	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D811	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D907	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D407	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D413	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
⚠ 2	D801	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
2	DZ201	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ202	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ802	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ902	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ601	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ603	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ906	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ907	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ604	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ605	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ908	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ909	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ910	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ203	0403-001321	DIODE-ZENER;MTZJ6.8C,6.66-7.01V,500mW,DO	
2	DZ302	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ303	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ304	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ305	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ306	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ804	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ401	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
2	DZ801	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ808	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ204	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ205	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT102	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT301	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT302	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT401	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT402	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT801	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT103	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT404	AA60-40014A	PIN-GT,ASSY;AUTO	
2	J102	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J103	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J105	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J108	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J111	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J112	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J113	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J114	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J115	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J116	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J117	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J119	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J122	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J123	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J124	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J203	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J205	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J206	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J207	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J208	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J209	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J210	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J211	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J212	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J213	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J214	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J216	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J217	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J218	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J219	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J222	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J223	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J224	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J225	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J226	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J227	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J228	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J229	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J230	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J232	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J234	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J236	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J237	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J238	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J239	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J241	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J242	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J244	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J246	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J247	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J248	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J401	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J402	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J404	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J409	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J411	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J412	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J414	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J416	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J421	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J422	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J424	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J428	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J601	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J602	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J603	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J604	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J606	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J607	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J611	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J614	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J615	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J616	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J617	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J618	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J619	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J620	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J621	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J622	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J624	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J627	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J629	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J631	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J632	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J703	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J704	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J708	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J715	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J716	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J717	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J801	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J802	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J803	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J804	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J805	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J806	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J807	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J810	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J811	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J816	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J819	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J820	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J821	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J824	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J826	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J829	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J830	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J831	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J832	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J833	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J909	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J911	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J912	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J913	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J915	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J916	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J917	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J924	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J925	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J926	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J927	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J928	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J932	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J933	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J934	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J936	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J939	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J941	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J942	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R939	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J714	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J249	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	D908	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J835	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J425	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J633	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J818	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J612	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L610	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J940	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J937	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J918	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J906	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J626	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J430	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J126	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J118	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J101	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J253	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J943	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J944	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J705	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J707	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J407	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J127	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J605	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J608	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J609	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L107	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J419	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J902	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J630	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J834	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L410	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J204	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J701	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J817	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L413	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R926	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R427	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	EY301	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY302	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY303	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY304	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY413	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY418	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY424	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY425	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY426	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY427	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY428	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY429	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY430	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY431	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY432	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY433	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY434	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY435	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY436	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY437	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY438	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY439	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY440	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY441	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY442	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY443	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY444	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY445	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY446	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY447	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY448	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY449	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY450	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY451	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY452	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY453	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY454	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY455	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY456	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY457	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY458	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY601	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY602	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY603	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY604	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY701	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY702	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY703	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY704	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY804	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY805	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY806	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY811	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY812	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY814	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY815	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY816	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY817	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY820	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY826	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY831	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY832	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY834	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY835	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY836	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY837	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY838	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY839	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY840	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY841	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY842	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY844	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY845	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY846	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY847	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY848	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY849	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY854	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY855	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY856	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY857	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY858	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY859	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	TOP1	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	TOP2	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL401	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL402	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL405	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL406	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL803	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL805	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL806	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL807	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL808	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL809	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL810	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL811	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	R236	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R237	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R238	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R247	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R622	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R621	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R935	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R202	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R243	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R245	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R246	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R310	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R716	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R715	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R606	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R602	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R601	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R620	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R629	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R309	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R609	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R952	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R940	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R941	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R942	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R947	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R948	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R102	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R103	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R604	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R605	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R610	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R611	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R612	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R613	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R628	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R627	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R706	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R707	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R708	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R907	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J920	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J904	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R925	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R955	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 2	RR430S	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R418	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
⚠ 2	RY801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY802S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	VP801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	X901	2801-003728	CRYSTAL-UNIT;6MHz,30ppm,28-AAM,20pF,40oh	
2	L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C707	2401-000939	C-AL;22uF,20%,25V,GP,TP,5x11,5	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L406	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L907	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L711	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L707	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L708	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L108	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L109	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L902	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L222	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L302	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L804	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L809	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J901	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L303	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L207	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L412	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J406	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L407	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L601	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L609	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L201	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L604	2701-000169	INDUCTOR-AXIAL;3.9uH,10%,2.5x3.4mm	
2	L905	2701-000211	INDUCTOR-AXIAL;68uH,10%,2.5x3.4mm	
2	Q201	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q203	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q906	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q908	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q204	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q907	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	R244	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R954	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R823	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R216	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R234	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R235	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R603	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R817	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R924	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R607	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R608	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R252	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R726	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R902	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R816	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R228	2001-000117	R-CARBON(S);680HM,5%,1/2W,AA,TP,2.4X6.4M	
2	R301	2004-001397	R-METAL(S);4.7Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R303	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R828	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R405	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R314	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R411	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R412	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R421	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R913	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R426	2003-000540	R-METAL OXIDE(S);1Kohm,5%,2W,AF,TP,4x12m	
2	R434	2003-000664	R-METAL OXIDE(S);33ohm,5%,2W,AF,TP,4x12m	
2	R614	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R615	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R616	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R617	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R226	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R931	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R812	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R831	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R956	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R214	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R701	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R702	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R703	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R704	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R705	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R242	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R802	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R803	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R804	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R805	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R806	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R813	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R832	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R810	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R819	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R820	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R822	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R824	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R825	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R901	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R903	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R905	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R906	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R921	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R927	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R928	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R937	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R938	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R724	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R725	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R251	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R223	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R248	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R249	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R250	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R911	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R922	2001-000924	R-CARBON;6800HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R923	2001-000924	R-CARBON;6800HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	C409	2301-001268	C-FILM,PPF;33nF,5%,630V,TP,20x11x17,7.5	
2	C411	2301-000104	C-FILM,PEF;1.2NF,5%,50V,TP,6.5X3.0X5.5MM	
2	C412	2301-000313	C-FILM,PEF;8.2nF,5%,100V,TP,7x3.2x7mm,5m	
2	C427	2401-002267	C-AL;2.2uF,20%,250V,GP,TP,8x11.5,5	
2	C833	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C229	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
2	CN901	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
2	CN903	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
2	CW901	2503-000156	C-NETWORK;100pFx4,20%,50V	
2	D203	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D204	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D205	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D206	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D901	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D902	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D903	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D904	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	DZ803	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
⚠ 2	FA802S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
2	HIC201	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC202	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC203	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC204	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	R302	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R409	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	R410	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	R413	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R424	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R827	2008-000284	R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
2	R829	2008-001029	R-FUSIBLE(S);5.6ohm,5%,2W,AF,TP,3.9x10mm	
2	R433	2003-001042	R-METAL OXIDE(S);5.6Kohm,5%,2W,AF,TP,3.9	
2	R717	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R105	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	X201	2801-003432	CRYSTAL-UNIT;20.25MHZ,30PPM,28-AAM,13PF,	
2	X601	2801-003903	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,12pF	
2	IC904	1203-001943	IC-VOL. DETECTOR;7025,TO-92,3P,-,PLASTIC	
2	PCB	AA41-00168H	PCB-MAIN;CS29A6,FR-1,1L,H,1.6T,330X245,K	
2	Q909	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
2	Q910	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
2	R403	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
2	L705	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L706	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L605	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L606	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L607	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L608	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L701	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	R106	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R313	2004-001137	R-METAL;6.8Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R710	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R241	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R315	2004-004970	R-METAL(S);62Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R811	2004-001408	R-METAL(S);91Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	R809	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R420	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	L901	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L903	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L904	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L909	2701-000191	INDUCTOR-AXIAL;47uH,10%,2.5x3.4mm	
2	L908	2701-000191	INDUCTOR-AXIAL;47uH,10%,2.5x3.4mm	
2	R818	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
2	CN702	3711-002647	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	
2	C656	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
2	C657	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
2	C306	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	R422	2001-000037	R-CARBON(S);33OOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R305	2003-002157	R-METAL OXIDE;2200HM,5%,2W,AG,TP,6X16MM	
2	R306	2003-002157	R-METAL OXIDE;2200HM,5%,2W,AG,TP,6X16MM	
2	C621	2401-002458	C-AL;1000uF,20%,35V,GP,TP,16x25,7.5	
2	C824	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C823	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C808	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C115	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C116	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C244	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C245	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	L209	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L210	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L801	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
2	L806	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
2	R945	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R946	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C104	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
⚠ 2	RX801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
2	R821	2004-001891	R-METAL(S);133Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R210	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
⚠ 2	FP801S	3601-000297	FUSE-CARTRIDGE;250V,5A,TIME-LAG,GLASS,5.	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	C835	2401-002289	C-AL;470uF,20%,35V,WT,TP,10x20,5	
2	C840	2401-002212	C-AL;10uF,20%,25V,WT,TP,5x11,5	
2	C827	2401-002212	C-AL;10uF,20%,25V,WT,TP,5x11,5	
2	C301	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
2	C106	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
2	R417	2004-001382	R-METAL(S);13Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	DZ602	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	CN502	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
2	R808	2001-001079	R-CARBON(S);15OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	C425	2301-001259	C-FILM,MPPF;100nF,5%,400V,TP,19x8x16,7.5	
2	C248	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	C246	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	R436	2003-002008	R-METAL OXIDE(S);18Kohm,5%,2W,AF,TP,3.9x	
2	R304	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
2	C102	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
2	L208	2701-000147	INDUCTOR-AXIAL;2.2uH,5%,2.4x3.4mm	
2	C247	2202-000849	C-CERAMIC,MLC-AXIAL;0.018NF,5%,50V,C0G,T	
2	C410	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2		HA68-02176A	LABEL;LABEL	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	C654	2201-000611	C-CERAMIC,DISC;0.056NF,5%,50V,C0G,TP,7X3	
2	R429	2001-001103	R-CARBON(S);20KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R213	2001-000232	R-CARBON;1.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	DZ806	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
⚠ 2	FA803S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
2	L401	2001-001038	R-CARBON(S);0.56OHM,5%,1/2W,AA,TP,2.4X6.	
2	R404	2001-001038	R-CARBON(S);0.56OHM,5%,1/2W,AA,TP,2.4X6.	
2	R207	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R212	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
2	R414	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R428	2001-000096	R-CARBON(S);1MOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R425	2008-001011	R-FUSIBLE(S);0.18ohm,10%,2W,AF,TP,3.9x10	
2	R401	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
2	R402	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
2	J914	2001-000674	R-CARBON;360OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R423	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
2	C925	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C828	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
2	J919	2701-000183	INDUCTOR-AXIAL;39uH,5%,2.5x3.4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C416	2301-000148	C-FILM,PEF;10nF,5%,100V,TP,7x3.2x7mm,5mm	
2	R415	2004-001987	R-METAL(S);4.3Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R826	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
2	KEZI	2303-000296	C-FILM,PPF;18nF,0.05,630V,BK,20x16x9.5mm	
2	R432	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
2	C203	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	R944	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	L910	2701-000215	INDUCTOR-AXIAL;8.2uH,10%,2.5x3.4mm	
2	C926	2202-000154	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
2	R835	2003-002181	R-METAL OXIDE(S);68Kohm,5%,2W,AG,TP,3.9x	
2	R836	2003-002181	R-METAL OXIDE(S);68Kohm,5%,2W,AG,TP,3.9x	
2	C420	2305-001003	C-FILM,MPEF;10nF,5%,250V,TP,13x4.5x9mm,7	
2	IC901	AA09-00181A	IC MICOM;SIM806EW3-A035,SIM806EW3-A035,5	
⚠ 2	IC201S	1204-001634	IC-VIDEO PROCESS;VDP3120B-C3,DIP,64P,-,P	
2	IC601	1204-001661	IC-SOUND PROCESSOR;MSP3411G-A2,DIP,52P,-	
⚠ 2	T401	AA26-50001L	TRANS-HORIZ.DRIVE;-,-,-,29mH,-,-,133uH,-	
⚠ 2	L403	AA27-00099A	COIL LINEARITY;23.5uH,23.5uH,DR14x15C:5.	
⚠ 2	TU01S	AA40-00079A	TUNER;TCPW3001PD16A(S),PAL,181CH,38.	
2		AA98-00245A	ASSY SUB PART;S51A,PCB MAIN(OPT)	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
⚠ 2	T801S	AA26-00046A	TRANS SWITCHING;-,-,-,AC90~260V,DC135/16	
⚠ 2	IC804	HA96-00243C	ASSY-H/S;-,REGULATOR,AA62-00045A,KA7806	
3		1203-000284	IC-POSI.FIXED REG.;7806,TO-220,3P,-,PLAS	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	L408	AA27-00103A	COIL CHOKE;600UH,-,600UH,+-10%,600UH,0.5	
⚠ 2	LX801S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,+-	
2	L405	AA27-00057A	COIL HORIZ. WIDTH;-,10mH,YL-9N 15x27.5 C	
⚠ 2	IC803	1203-001697	IC-VOLTAGE REGULATOR;78R08,TO-220,4P,-,P	
2	Q404	HA96-00437A	ASSY-H/S;ASSY-H/S;AA62-00076A,IRF620	
3		0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		HA62-00076A	HEAT SINK;AL,100Hz,T1.0,10,40	
2	Q402	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
⚠ 2	CY802S	2201-002002	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,TP,16X	
2	C407	2301-001338	C-FILM,MPE-PPF;0.68nF,5%,1.6kV,TP,28x7x1	
2	C405	2306-000330	C-FILM,MPPF;7.7nF,3%,1.6KV,TP,28.5x18.5x	
2	C426	2306-000204	C-FILM,MPPF;430nF,5%,400V,TP,26x20.5x12.	
2	IC903	1203-001944	IC-POSI.FIXED REG.;78RM33,TO-220,3P,-,PL	
2	C806	2401-003031	C-AL;470uF,20%,450V,GP,BK,35x45mm,1	
2	C820	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM	
2	R807	2006-001083	R-CEMENT;120ohm,5%,5W,CJ,TP,14x10x27mm	
2	C423	2301-001192	C-FILM,MPPF;820nF,5%,400V,TP,29x18.5x25.	
2	C406	2306-000357	C-FILM,MPPF;8.2nF,5%,1.6KV,BK,20x9.5x17.	
2	JA702	3722-001425	JACK-PIN;2P,3.4mm,NI,BLK,-	
2	TOP	AA39-20010B	LEAD CONNECTOR-ASSY,,1P,500,YFH800-01,S,	
2	L808	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
2	L402	AA27-00067A	COIL HORIZ. WIDTH;-,240uH,YL9N 12x20 C:6	
2	CN801	3711-004721	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2	CN802	3711-004720	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	

ASSY-ACCESSORY

1		HA94-01594E	ASSY-ACCESSORY;KS3A,FLAT,XEC,DOLBY,50HZ
2		4301-000121	BATTERY-MN;1.5V,-,AAA,10.5x44.5m,HOLDER
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM
2		HA68-02124A	LABEL;A/P120(G),70,69,WHITE,XECCO
2		HA68-00971A	LABEL-BACK,DOLBY;A/P100(G),SILVER-BLACK

ASSY CRT

1		AA94-05795A	ASSY CRT;A68QCP891X307,+400MG,29,ITC,2
⚠ 2		AA03-00342A	CRT COLOR;A68QCP893X003,400MG,1.11MH,14.
2		AA27-00128A	COIL DEGAUSSING;-,-,-,-,50T,7,-,29inch,2
2		AA98-70011A	ASSY TBC WIRE(P);-,29INCH,NTSC,PAL,2P-WH

ASSY PCB CONTROL

1		AA95-01530A	ASSY PCB CONTROL;,KS3A,XXA8-W8
2	RY03	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM
2	RY05	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM
2	RY02	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM
2	RY04	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M
2	PCB	AA41-00284C	PCB-CONTROL;CW32W8,FR-1,1L,C,1.6T,245X24
2	LY01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)
2	DZY02	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
2	SWY02	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS
2	SWY03	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS
2	SWY04	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS
2	SWY05	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS
2	SWY06	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS
2	CNY02	AA39-20005A	LEAD CONNECTOR-ASSY,,3P,500,YBNH025-03,6

ASSY PCB CRT

1		AA95-01533A	ASSY PCB CRT;,KS3A,28,29,W8-Z4-A8-K8,5
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR
2	CN501A	3711-002641	CONNECTOR-HEADER;BOX,10P,1R,2.54mm,STRAI
2	CN501A	AA39-00225A	LEAD CONNECTOR-ASSY,,10P,600MM,67096-010
2	CN502A	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH
2	CN502E	AA39-20029K	LEAD CONNECTOR-ASSY,,7P,400,67096-007,S,
2	CNF01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH
2	CNG01	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH
2	IC501	HA96-50151A	ASSY-H/S;-,TR,AA61-10060A,TDA6101Q,-
2	IC502	HA96-50151A	ASSY-H/S;-,TR,AA61-10060A,TDA6101Q,-
2	IC503	HA96-50151A	ASSY-H/S;-,TR,AA61-10060A,TDA6101Q,-
3		1201-000539	IC-VIDEO AMP;6101,ZIP,9P,-,SINGLE,-,PLAS
3		6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1
3		6021-000154	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C
3	BRC501	AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-,-
2	ICG01	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV
2	QG03	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6
2	VA999	3704-000114	SOCKET-CRT;14P,29.1,35.5,SN,ISH09S/BK
2		HA68-02176A	LABEL;LABEL
2	C501	2201-000247	C-CERAMIC,DISC;0.015NF,5%,50V,C0G,TP,5X3
2	C507	2201-000247	C-CERAMIC,DISC;0.015NF,5%,50V,C0G,TP,5X3
2	C502	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5
2	C505	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5
2	C508	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5
2	CF07	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5
2	C503	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.
2	C506	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.
2	C509	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.
2	C511	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5
2	C512	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5
2	C515	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5
2	C526	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5
2	C514	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m
2	C518	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5
2	C519	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5
2	C520	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5
2	C521	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5
2	C522	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5
2	C523	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5
2	CF01	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM
2	CF02	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm
2	C516	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm
2	CF03	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3
2	CF04	2201-000653	C-CERAMIC,DISC;0.068NF,5%,50V,SL,TP,5X3M
2	CF05	2301-000261	C-FILM,PEF;4.7nF,5%,100V,TP,10.5x12.5x6.
2	CF06	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP
2	CF08	2201-000604	C-CERAMIC,DISC;0.056NF,+100-0%,500V,SL,T
2	CF10	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5
2	CF12	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5
2	CF14	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5
2	CG01	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5
2	CG04	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	CG02	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
2	CG03	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	D502	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D507	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D508	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D509	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D510	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D511	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D512	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF02	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF03	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DF04	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DG01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DZ503	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
2	KEZI	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
2	DZF01	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
2	DZF02	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
2	EL81	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL82	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL83	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL84	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL85	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL86	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL87	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL88	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL89	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL90	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL91	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL92	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL93	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL94	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT504	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT505	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT508	AA60-40014A	PIN-GT,ASSY;AUTO	
2	J501	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J503	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J505	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J506	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J507	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J508	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J509	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J510	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J511	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JG01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J512	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J513	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J514	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J515	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J516	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J517	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J518	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J519	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J520	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J524	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J526	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J527	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J528	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF06	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF07	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J529	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J530	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J521	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J523	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J531	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L501	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
2	LF02	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
2	LF01	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L505	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L506	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	LF03	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	PCB	AA41-00210D	PCB-CRT;CS29A6,FR-1,1L,D,1.6T,330x245,KS	
2	Q502	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	QG01	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q503	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	QF01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	QF02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	QF03	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	RF10	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF11	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R502	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R507	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R512	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R503	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R513	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R508	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R504	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R509	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R539	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R505	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R510	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R517	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF18	2003-000458	R-METAL OXIDE(S);100ohm,5%,2W,AF,TP,4x12	
2	R519	2002-001009	R-COMPOSITION;2.7Kohm,10%,1/2W,AA,TP,3.7	
2	R521	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF05	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R522	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R542	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R543	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R544	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R546	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R501	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF02	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF03	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF06	2001-000989	R-CARBON;820KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF07	2004-001989	R-METAL;620ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	RF08	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF09	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF12	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF13	2001-001179	R-CARBON(S);68KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF16	2001-001179	R-CARBON(S);68KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF14	2001-001071	R-CARBON(S);12KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF15	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF17	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RG06	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RG07	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF19	2003-001023	R-METAL OXIDE(S);120ohm,5%,2W,AF,TP,3.9x	
2	RF20	2003-002214	R-METAL OXIDE(S);680ohm,5%,2W,AG,TP,3.9x	
2	RF21	2003-002214	R-METAL OXIDE(S);680ohm,5%,2W,AG,TP,3.9x	
2	RF22	2003-002214	R-METAL OXIDE(S);680ohm,5%,2W,AG,TP,3.9x	
2	RF23	2003-000746	R-METAL OXIDE(S);56ohm,5%,2W,AF,TP,4x12m	
2	RF24	2003-000746	R-METAL OXIDE(S);56ohm,5%,2W,AF,TP,4x12m	
2	RF25	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	RG01	2004-001397	R-METAL(S);4.7Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	RG02	2004-002022	R-METAL(S);51Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	RG04	2004-002022	R-METAL(S);51Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	RG03	2004-001987	R-METAL(S);4.3Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	RG05	2001-001163	R-CARBON(S);560OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RG08	2001-001163	R-CARBON(S);560OHM,5%,1/2W,AA,TP,2.4X6.4	
2	L503	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L504	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	LF04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	LF05	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	EY501	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	R518	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R526	2004-000500	R-METAL;2.7Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R527	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
2	DZG501	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	L507	2701-000215	INDUCTOR-AXIAL;8.2uH,10%,2.5x3.4mm	
2	SG501	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG503	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	SG504	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG505	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2		HA98-00054A	ASSY SUB PART;ASSY SUB PART;KS3A,PCB,CRT	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
2	QF04	HA96-50149A	ASSY-H/S;-,AA62-30013A,2SC2344,-	
3		0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
3	SCR09	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S09	AA62-30013A	HEAT SINK-ES;-,A6063 EXTR,-,-,45(21) T02	
2	QF05	HA96-50149B	ASSY-H/S;-,TR,AA62-30013A,2SA1011,-	
3	QV10	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
3	SCR10	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S10	AA62-30013A	HEAT SINK-ES;-,A6063 EXTR,-,-,45(21) T02	
2	C510	2401-001525	C-AL;47uF,20%,250V,GP,BK,16x25mm,7.	
2	R523	2008-000267	R-FUSIBLE(S);2.4ohm,5%,2W,AA,TP,3.9x10mm	
2	CF11	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	JA501	3722-001503	JACK-PIN;1P,1PI,NI,RED,SCR-JACK	
2	QG02	0502-000244	TR-POWER;KSA940,PNP,1.5W,TO-220,-,40-14	
2	C513	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	

ASSY ETC-PCB SUB POWER

1		AA95-01546A	ASSY ETC-PCB SUB POWER;,29A8,28-32W8,KS3	
⚠ 2	SW811S	3403-001107	SWITCH-PUSH;250V,5A,DPST,-,KDC-A04	
⚠ 2	PD812S	AA39-20179F	LEAD CONNECTOR-ASSY;,3(2)P,400MM,YFH800-	
2	RMY01	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
2	LDY01	AA96-00461A	ASSY LED GUIDE;-,-,SL-255D,RED/GRN	
2	CNY01	AA39-20546C	LEAD CONNECTOR-ASSY;,5P,500/480MM,YBNH25	
2	DZY01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZY03	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	RY01	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,TP,2.4X6.4M	
2	CY01	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
2	PCB	AA41-00285B	PCB-POWER S/W;WS32W8,FR-1,1L,B,1.6T,245x	
2	EL01	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL02	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL03	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL04	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	GTY01	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GTY02	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GTY03	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GTY08	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GTY09	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GTY10	AA60-40014A	PIN-GT,ASSY;AUTO	
2	JY01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	

ASSY-KNOB-CONTROL

1		HA91-00910A	ASSY-KNOB-CONTROL;HIPS,HB,GRY,32W8	
2		HA64-02497A	KNOB CONTROL;;32W8,HIPS,HB,GRY	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00012A	LP-RESIN;,M BATCH,WILSON 6053-GY-60,GRY	
2	KC+PCB	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	

ASSYPCB-PFC

1		HA94-05786B	ASSYPCB-PFC;28W8/Z4-29A8/K8,50HZ,5786A	
2	EYP07	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP08	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP09	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP10	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP11	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP12	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP13	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP14	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP15	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP16	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP17	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP18	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP01	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP02	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP03	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP04	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP05	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP06	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	PCB	AA41-00404A	PCB-PFC;CS2539,FR-1,1L,A,1.6T,330x245,KS	
2	JP801	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JP802	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	CNP02	AA39-00236A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YHL500-	
2	PFT01	AA27-00116A	COIL CHOKE;CODE_NO,-,35mH,-0, +5%,-,2.80	
2		HA98-600020	ASSY-SUB,PART,KS4A,PFC PCB	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2		HA61-00987A	HOLDER-PFC;32W8,29A8,28W8,HIPS,ALLFLAT	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2	CNP02	3711-004721	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2		6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	CNP01	AA39-00235A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YHL500-	
2	CNP01	3711-004720	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
⚠ 2	LX803S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,+-	
⚠ 2	CX803S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	

ASSY-CABINET(COM)

1		AA90-01095D	ASSY-CABINET(COM);KS3A,VL-1823,29A8D	
2		HA91-00945C	ASSY CABINET BACK;,KS3A,VL-1823,29A8	
3		AA64-00894G	INLAY-BACK;D3,PS SHEET,T0.3,-,-,BLK,SCAR	
3		HA59-00244A	TERMINAL-BOARD;TERMINAL-BOARD;32W8,HIPS,	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
3		HA64-02446C	CABINET BACK;29A8,VL-1823,GRY	
4		AA81-00096A	RESIN-A;VL-1823,G5433,A	
2		AA65-30113A	CLAMPER CORE-D,COIL;-,NYLON 66,V2,-,BLK,	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	
2	CRT+CF	AA60-10050V	SCREW-ASSY;-,SWRCH18A,M6,L30,HH,+,WC,-,Z	
2	CF+SPK	AA60-10050A	SCREW-ASSY;-,SWRCH18A,M4,L25,RH,+,WP,-,Z	
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	rating	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	CF+AV	6003-001135	SCREW-TAPTITE;TH,+,B,M4.0,L15,BLK,SWRCH1	
2	KC+POW	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	KC+CON	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	CHL+DF	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	CF+CHR	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW	
2	CB+TB	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CF+KC	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CB+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	TB+SCR	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2		HA61-00392C	RAIL-L;32W8,HIPS,HB,NTR	
3		HA83-00013A	LP-RESIN HIPS;,NTR,HB,DOW A-TECH,IEC65	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		HA61-00392B	RAIL-L;SEH 32W8,ABS HB,NTR	
3		HA83-00013A	LP-RESIN HIPS;,NTR,HB,DOW A-TECH,IEC65	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2		HA68-02177B	LABEL-POS;ALL,30MM,65MM,WHITE,AA68-02177	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	

Level	Loc. No.	Code No.	Description ; Specification	Remark
			ASSY CABINET FRONT	
1		HA91-00882H	ASSY CABINET FRONT;,29A8D,PLANO,COR-PROT	
2	CF+CM	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	WR+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2		HA64-00915B	WINDOW-REMOCON;32W8,PC,-,-,-,-VIOLET,-	
3		HA83-00009A	LP-RESIN PC;,LEXAN 121R,VIOLET	
2		HA64-00006B	CABINET-MASK;;29A8,PLANO,HIPS,HB,DB-004P	
3		HA83-00028A	LP-MARKING PAINT;,DARK BLUE,DP-004P	
3		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
2		AA64-02505A	KNOB POWER;32W8,HIPS,HB,BLK	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00007A	LP-RESIN;,M BATCH,WILSON 902-BK-60,BLK	
2		HA64-00916B	INDICATOR-LED;32W8,ACRYL,-,CLR,-,-,-,	
3		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
2		AA64-01062A	BADGE-BRAND;32W8,AL FORGING,-,-,L65,-,SI	
2		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
2		AA61-60003T	SPRING ETC-CS;-,SUS304,-,-,OD7,N5,OD7,-,	
2		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2		AA64-60399C	INLAY-AV;-,PS SHEET,T0.3,-,-,BLK,S/GRAY	
2		AA64-60446C	INLAY-PC,JACK;29A6,PS SHEET,T0.5,BLK,SIL	
2		AA64-60445Q	INLAY AV;72A6,PS SHEET,-,-,-,BLK,KS3A 50	
2		AA64-02435B	CABINET-FRONT;29A8,HIPS,HB,SV-907P,GRY,C	
3		HA83-00029A	LP-MARKING PAINT;,METALLIC-SILVER,SV-907	
3		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50	
			ASSY ETC-PCB A/V BOARD	
1		AA95-01521A	ASSY ETC-PCB A/V BOARD;,28W8,29A8,KS3A,5	
2	JH701	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
2	JA701	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
2	CN701	AA39-20068G	LEAD CONNECTOR-ASSY;,8P,700MM,YBNH025-08	
2	CN703	AA39-20069A	LEAD CONNECTOR-ASSY;,5P,500,YBNH025-05,6	
2	C701	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C702	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	L701	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L702	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L703	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L704	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L709	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	R701	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
2	R702	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
2	C703	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C704	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C705	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
2	C706	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
2	L707	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L708	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	PCB	AA41-00155B	PCB-SIDE AV;CS29A6,FR-1,1L,B,1.6T,245x24	
2	CN704	AA39-20499D	LEAD CONNECTOR-ASSY;,4P,400,YBNH025-04,S	
			ASSY HOLDER SPK	
1		AA91-00150B	ASSY HOLDER SPK;DP,-,8OHM/15W,-,AA91-001	
			ASSY PACKING	
1		AA90-01135A	ASSY PACKING;29A8	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		HA69-01500A	CUSHION-SET;29A8,PS,C=0.02	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	
2		AA69-00744F	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1400,H1	
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE	
2		HA69-00480B	PACKING-CASE;29A8,CB D-4 AB,-,-,,YE	
2		HA83-00057B	LP-TAPE-CELLULOSE;,HA02-030010,T0,046,W7	
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM	
			REMOCON	
1		AA59-00116B	REMOCON;-,TM57,37,D3/D4,L/GRAY,S/S,GRA	
			ASSY POWER CORD	
⚠ 1		AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	

7-2 CW29A8VDESXXEC

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-05718B	ASSY PCB MAIN(OPT);CW29A8D,KS3A/H,SEB,IN	
2	C815	2401-003602	C-AL;220uF,20%,160V,GP,BK,22x25mm,1	
2	CN501	3711-002641	CONNECTOR-HEADER;BOX,10P,1R,2.54mm,STRAI	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
2	IC301	HA96-50406B	ASSY-H/S;ASSY-H/S;-,AA62-30180B,LA7845	
3		1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
3		AA62-30180B	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,70MM,-,	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC401	1202-000103	IC-VOLTAGE COMP.;393,DIP,8P,300MIL,DUAL,	
⚠ 2	IC801S	HA96-50371C	ASSY H/S;-,-,AA62-30181H,KA3A1265R,-	
3		AA13-00101A	IC HYBRID;KA3S1265RD,CN5039,5PIN,-50TO12	
3		AA61-10386A	BRACKET-IC;-,SECC 100,T1.0,-,-,-,KA2S068	
3		AA62-30197D	HEAT SINK-ES;DP,-,-,-,AA62-30181H,-,-,-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	JA701	3722-000195	JACK-SCART;42P,-,SN,BLK,NO	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	PC801S	0604-001038	PHOTO-COUPLER;TR,130-260%,200mW,DIP-4,ST	
⚠ 2	PT801S	1404-001156	THERMISTOR-PTC;90HM,+30%/-20%,220VRMS,27	
⚠ 2	T444S	AA26-00145A	TRANS FBT;1372.0076B,CT29A5P3.5MH,135V	
2	HC801	HA96-00274A	ASSY-H/S;-,COMPLEX,AA62-00053A,FMLG12S	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00053A	HEAT SINK-PS;-,-,-,SILVER,HOLE 22mm,ALL,	
⚠ 3	D802	0402-001230	DIODE-RECTIFIER;FMG-G2CS,1000V,3A,TO-220	
⚠ 3	D805	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	D806	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	D807	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	IC802	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	HC401	HA96-00275A	ASSY-H/S;-,COMPLEX,AA62-00051A,KSD5703,	
3		AA62-00051A	HEAT SINK-PS;-,-,-,SILVER,HOLE 31mm,ALL,	
⚠ 3	D414	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
3	Q401	0502-001136	TR-POWER;KSD5703,NPN,70W,TO-3PF,ST,8-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	D801S	0402-001399	DIODE-BRIDGE;GSIB660,600V,6A,SIP-4,BK	
2	IC602	HA96-50369B	ASSY-H/S;-,-,AA62-30181F,TDA7297,-	
3		1201-001064	IC-POWER AMP;7297,ZIP,15P,-,DUAL,32dB,PL	
3		AA62-30181F	HEAT SINK-ES;-,AL6063 EXTR.,2,WHT,50MM,-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	IC902	1103-001171	IC-EEPROM;L51DC,16KBit,DIP,8P,300MIL,10m	
2	C105	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C101	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C103	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C228	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C230	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C809	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C810	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C811	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C202	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C205	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C920	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C231	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C215	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C630	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C631	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C645	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C652	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C603	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C708	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C214	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C216	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C605	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C620	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C635	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C646	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C829	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C837	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C839	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C916	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C308	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C914	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C831	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C825	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C217	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C636	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C905	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C607	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C608	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C903	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C211	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C212	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C213	2301-000247	C-FILM,PEF;33nF,5%,50V,TP,8.1x4.5x13mm,5	
2	C218	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C219	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C220	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C221	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C222	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C223	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C901	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C921	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C922	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C919	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C924	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C233	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C234	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C235	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C907	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C909	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C237	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C841	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C201	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C303	2201-002031	C-CERAMIC,DISC;0.005NF,0.5PF,50V,C0G,TP,	
2	C224	2201-002031	C-CERAMIC,DISC;0.005NF,0.5PF,50V,C0G,TP,	
2	C225	2201-002031	C-CERAMIC,DISC;0.005NF,0.5PF,50V,C0G,TP,	
2	C304	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C305	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
2	C821	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C902	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C302	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C401	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C403	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C421	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C402	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
2	C404	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
2	C408	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	
2	C414	2401-002597	C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
2	C418	2401-002597	C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
2	C422	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
2	C424	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
2	C601	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
2	C610	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C611	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C415	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C612	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C613	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C617	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C917	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C413	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C622	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C625	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C626	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C628	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C623	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C624	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C627	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C629	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C642	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C644	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C701	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C638	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C639	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C249	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C632	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
2	C634	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C826	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C832	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C838	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C637	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C640	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C641	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C643	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C912	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C647	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
2	C649	2301-000108	C-FILM,PEF;1.5nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C804	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
2	C805	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
2	C807	2301-001397	C-FILM,PPF;2.2nF,5%,1.2kV,TP,15x8.5x13.5	
2	C814	2201-000406	C-CERAMIC,DISC;0.27NF,10%,2KV,Y5P,TP,6.3	
2	C817	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C819	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C822	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C419	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C818	2401-000722	C-AL;2200uF,20%,25V,WT,TP,16x25,7.5	
2	C910	2201-000980	C-CERAMIC,DISC;0.03NF,5%,50V,C0G,TP,5X3M	
2	C911	2201-000980	C-CERAMIC,DISC;0.03NF,5%,50V,C0G,TP,5X3M	
2	C913	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C915	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C918	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C210	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D202	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D207	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D208	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D209	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D210	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D211	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D602	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D804	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DZ402	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D906	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D405	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D408	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D411	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D803	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D816	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
⚠ 2	D404	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
⚠ 2	D402	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
⚠ 2	D403	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D406	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D810	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D811	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D907	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D407	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D413	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
⚠ 2	D801	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
2	DZ201	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ202	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ802	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ902	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ601	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ603	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ906	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	DZ907	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ604	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ605	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ908	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ909	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ910	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ203	0403-001321	DIODE-ZENER;MTZJ6.8C,6.66-7.01V,500mW,DO	
2	DZ302	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ303	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ304	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ305	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ306	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ804	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ401	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
2	DZ801	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ808	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ204	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ205	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT102	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT301	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT302	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT401	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT402	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT801	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT103	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT404	AA60-40014A	PIN-GT,ASSY;AUTO	
2	J102	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J103	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J105	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J108	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J111	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J112	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J113	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J114	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J115	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J116	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J117	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J119	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J122	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J123	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J124	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J203	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J205	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J206	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J207	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J208	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J209	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J210	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J211	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J212	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J213	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J214	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J216	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J217	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J218	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J219	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J222	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J223	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J224	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J225	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J226	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J227	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J228	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J229	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J230	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J232	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J234	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J236	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J237	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J238	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J239	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J241	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J242	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J244	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J246	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J247	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J248	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J401	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J402	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J404	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J409	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J411	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J412	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J414	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J416	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J421	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J422	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J424	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J428	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J601	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J602	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J603	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J604	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J606	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J607	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J611	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J614	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J615	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J616	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J617	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J618	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J619	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J620	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J621	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J622	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J624	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J627	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J629	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J631	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J632	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J703	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J704	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J708	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J715	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J716	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J717	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J801	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J802	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J803	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J804	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J805	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J806	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J807	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J810	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J811	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J816	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J819	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J820	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J821	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J824	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J826	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J829	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J830	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J831	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J832	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J833	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J909	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J911	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J912	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J913	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J915	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J916	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J917	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J924	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J925	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J926	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J927	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J928	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J932	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J933	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J934	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J936	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J939	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J941	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J942	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R939	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J714	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J249	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	D908	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J835	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J425	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J633	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J818	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J612	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L610	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J940	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J937	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J918	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J906	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J626	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J430	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J126	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J118	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J101	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J253	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J943	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J944	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J705	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J707	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J407	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J127	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J605	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J608	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J609	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L107	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J419	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J902	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J630	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J834	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L410	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J204	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J701	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J817	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L413	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R926	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R427	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	EY301	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY302	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY303	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY304	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY413	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY418	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	EY424	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY425	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY426	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY427	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY428	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY429	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY430	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY431	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY432	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY433	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY434	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY435	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY436	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY437	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY438	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY439	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY440	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY441	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY442	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY443	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY444	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY445	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY446	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY447	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY448	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY449	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY450	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY451	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY452	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY453	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY454	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY455	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY456	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY457	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY458	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY601	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY602	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY603	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY604	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY701	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY702	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY703	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY704	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY804	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY805	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY806	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY811	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY812	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY814	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY815	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY816	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY817	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY820	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY826	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY831	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY832	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY834	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY835	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY836	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY837	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY838	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY839	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY840	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY841	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY842	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY844	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY845	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY846	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY847	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY848	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY849	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY854	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY855	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY856	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY857	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY858	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY859	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	TOP1	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	TOP2	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL401	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL402	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL405	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL406	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL803	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL805	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL806	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL807	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL808	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL809	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL810	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL811	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	R236	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R237	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R238	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R247	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R622	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R621	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R935	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R202	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R243	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R245	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R246	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R310	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R716	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R606	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R602	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R601	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R620	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R629	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R309	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R609	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R952	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R940	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R941	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R942	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R947	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R948	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R102	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R103	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R604	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R605	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R610	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R611	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R612	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R613	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R628	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R627	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R706	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R707	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R708	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R907	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J920	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J904	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R925	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R955	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 2	RR430S	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R418	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
⚠ 2	RY801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY802S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	VP801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	X901	2801-003728	CRYSTAL-UNIT;6MHz,30ppm,28-AAM,20pF,40oh	
2	L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C707	2401-000939	C-AL;22uF,20%,25V,GP,TP,5x11,5	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L406	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L907	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L711	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L707	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L708	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L108	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L109	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L902	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L222	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L302	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L804	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L809	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J901	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L303	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L207	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L412	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J406	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L407	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L601	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L609	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L201	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L604	2701-000169	INDUCTOR-AXIAL;3.9uH,10%,2.5x3.4mm	
2	L905	2701-000211	INDUCTOR-AXIAL;68uH,10%,2.5x3.4mm	
2	Q201	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q203	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q906	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q908	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q204	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q907	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	R244	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R954	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R823	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R216	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R234	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R235	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R603	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R817	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R924	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R607	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R608	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R252	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R726	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R902	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R816	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R228	2001-000117	R-CARBON(S);680HM,5%,1/2W,AA,TP,2.4X6.4M	
2	R301	2004-001397	R-METAL(S);4.7Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R303	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R828	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R405	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R314	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R411	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R412	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R421	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R913	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R426	2003-000540	R-METAL OXIDE(S);1Kohm,5%,2W,AF,TP,4x12m	
2	R434	2003-000664	R-METAL OXIDE(S);33ohm,5%,2W,AF,TP,4x12m	
2	R614	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R615	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R616	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R617	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R226	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R931	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R812	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R831	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R956	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R214	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R701	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R702	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R703	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R704	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R705	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R242	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R802	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R803	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R804	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R805	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R806	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R813	2001-001153	R-CARBON(S);470HM,5%,1/2W,AA,TP,2.4X6.4M	
2	R832	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R810	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R819	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R820	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R822	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R824	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R825	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R901	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R905	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R906	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R921	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R927	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R928	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R937	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R938	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R724	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R725	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R251	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R223	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R248	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R249	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R250	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R911	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R922	2001-000924	R-CARBON;6800HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R923	2001-000924	R-CARBON;6800HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	C409	2301-001268	C-FILM,PPF;33nF,5%,630V,TP,20x11x17,7.5	
2	C411	2301-000104	C-FILM,PEF;1.2NF,5%,50V,TP,6.5X3.0X5.5MM	
2	C412	2301-000313	C-FILM,PEF;8.2nF,5%,100V,TP,7x3.2x7mm,5m	
2	C427	2401-002267	C-AL;2.2uF,20%,250V,GP,TP,8x11.5,5	
2	C833	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C229	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
2	CN901	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
2	CN903	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
2	CW901	2503-000156	C-NETWORK;100pFx4,20%,50V	
2	D203	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D204	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D205	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D206	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D901	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D902	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D903	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D904	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	DZ803	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
⚠ 2	FA802S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
2	HIC201	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC202	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC203	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC204	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	R302	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R409	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	R410	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	R413	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R424	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R827	2008-000284	R-FUSIBLE(S);0.1OHM,10%,2W,AF,TP,3.9X10M	
2	R829	2008-001029	R-FUSIBLE(S);5.6ohm,5%,2W,AF,TP,3.9x10mm	
2	R433	2003-001042	R-METAL OXIDE(S);5.6Kohm,5%,2W,AF,TP,3.9	
2	R717	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R105	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	X201	2801-003432	CRYSTAL-UNIT;20.25MHZ,30PPM,28-AAM,13PF,	
2	X601	2801-003903	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,12pF	
2	IC904	1203-001943	IC-VOL. DETECTOR;7025,TO-92,3P,-,PLASTIC	
2	PCB	AA41-00168H	PCB-MAIN;CS29A6,FR-1,1L,H,1.6T,330X245,K	
2	Q909	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
2	Q910	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
2	R403	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
2	L705	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L706	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L605	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L606	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L607	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L608	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L701	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	R106	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R313	2004-001137	R-METAL;6.8Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R710	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R241	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R315	2004-004970	R-METAL(S);62Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R811	2004-001408	R-METAL(S);91Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	R809	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R420	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	L901	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L903	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L904	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L909	2701-000191	INDUCTOR-AXIAL;47uH,10%,2.5x3.4mm	
2	L908	2701-000191	INDUCTOR-AXIAL;47uH,10%,2.5x3.4mm	
2	R818	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
2	CN702	3711-002647	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	
2	C656	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
2	C657	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
2	C306	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	R422	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R305	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
2	R306	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
2	C621	2401-002458	C-AL;1000uF,20%,35V,GP,TP,16x25,7.5	
2	C824	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C823	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C808	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C115	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C116	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C244	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C245	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	L209	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L210	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L801	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
2	L806	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
2	R945	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R946	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C104	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
⚠ 2	RX801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
2	R821	2004-001891	R-METAL(S);133Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R210	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
⚠ 2	FP801S	3601-000297	FUSE-CARTRIDGE;250V,5A,TIME-LAG,GLASS,5.	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	C835	2401-002289	C-AL;470uF,20%,35V,WT,TP,10x20,5	
2	C840	2401-002212	C-AL;10uF,20%,25V,WT,TP,5x11,5	
2	C827	2401-002212	C-AL;10uF,20%,25V,WT,TP,5x11,5	
2	C301	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
2	C106	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
2	R417	2004-001382	R-METAL(S);13Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	DZ602	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	CN502	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
2	R808	2001-001079	R-CARBON(S);150HM,5%,1/2W,AA,TP,2.4X6.4M	
2	C425	2301-001259	C-FILM,MPPF;100nF,5%,400V,TP,19x8x16,7.5	
2	C248	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	C246	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	R436	2003-002008	R-METAL OXIDE(S);18Kohm,5%,2W,AF,TP,3.9x	
2	R304	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
2	C102	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
2	L208	2701-000147	INDUCTOR-AXIAL;2.2uH,5%,2.4x3.4mm	
2	C247	2202-000849	C-CERAMIC,MLC-AXIAL;0.018NF,5%,50V,C0G,T	
2	C410	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2		HA68-02176A	LABEL;LABEL	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	C654	2201-000611	C-CERAMIC,DISC;0.056NF,5%,50V,C0G,TP,7X3	
2	R429	2001-001103	R-CARBON(S);20KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R213	2001-000232	R-CARBON;1.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	DZ806	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
⚠ 2	FA803S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
⚠ 2	L401	2001-001038	R-CARBON(S);0.56OHM,5%,1/2W,AA,TP,2.4X6.	
2	R404	2001-001038	R-CARBON(S);0.56OHM,5%,1/2W,AA,TP,2.4X6.	
2	R207	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R212	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
2	R414	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R428	2001-000096	R-CARBON(S);1MOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R425	2008-001011	R-FUSIBLE(S);0.18ohm,10%,2W,AF,TP,3.9x10	
2	R401	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
2	R402	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
2	J914	2001-000674	R-CARBON;3600HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R423	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
2	C925	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C828	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
2	J919	2701-000183	INDUCTOR-AXIAL;39uH,5%,2.5x3.4mm	
2	C416	2301-000148	C-FILM,PEF;10nF,5%,100V,TP,7x3.2x7mm,5mm	
2	R415	2004-001987	R-METAL(S);4.3Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R826	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
2	KEZI	2303-000296	C-FILM,PPF;18nF,0.05,630V,BK,20x16x9.5mm	
2	R432	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
2	C203	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	R944	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	L910	2701-000215	INDUCTOR-AXIAL;8.2uH,10%,2.5x3.4mm	
2	C926	2202-000154	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
2	R835	2003-002181	R-METAL OXIDE(S);68Kohm,5%,2W,AG,TP,3.9x	
2	R836	2003-002181	R-METAL OXIDE(S);68Kohm,5%,2W,AG,TP,3.9x	
2	C420	2305-001003	C-FILM,MPEF;10nF,5%,250V,TP,13x4.5x9mm,7	
2	IC901	AA09-00181A	IC MICOM;SIM806EW3-A035,SIM806EW3-A035,5	
⚠ 2	IC201S	1204-001634	IC-VIDEO PROCESS;VDP3120B-C3,DIP,64P,-,P	
2	IC601	1204-001661	IC-SOUND PROCESSOR;MSP3411G-A2,DIP,52P,-	
⚠ 2	T401	AA26-50001L	TRANS-HORIZ.DRIVE;-,-,-,29mH,-,-,133uH,-	
⚠ 2	L403	AA27-00099A	COIL LINEARITY;23.5uH,23.5uH,DR14x15C:5.	

Level	Loc. No.	Code No.	Description ; Specification	Remark
⚠ 2	TU01S	AA40-00079A	TUNER;TCPW3001PD16A(S),PAL,181CH,38.	
2		AA98-00245A	ASSY SUB PART;S51A,PCB MAIN(OPT)	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
⚠ 2	T801S	AA26-00046A	TRANS SWITCHING;-,-,-,-AC90~260V,DC135/16	
⚠ 2	IC804	HA96-00243C	ASSY-H/S;-,REGULATOR,AA62-00045A,KA7806	
3		1203-000284	IC-POSI.FIXED REG.;7806,TO-220,3P,-,PLAS	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	L408	AA27-00103A	COIL CHOKE;600UH,-,600UH,+-10%,600UH,0.5	
⚠ 2	LX801S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,+-	
2	L405	AA27-00057A	COIL HORIZ. WIDTH;-,10mH,YL-9N 15x27.5 C	
⚠ 2	IC803	1203-001697	IC-VOLTAGE REGULATOR;78R08,TO-220,4P,-,P	
2	Q404	HA96-00437A	ASSY-H/S;ASSY-H/S;AA62-00076A,IRF620	
3		0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		HA62-00076A	HEAT SINK;AL,100Hz,T1.0,10,40	
2	Q402	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
⚠ 2	CY802S	2201-002002	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,TP,16X	
2	C407	2301-001338	C-FILM,MPE-PPF;0.68nF,5%,1.6kV,TP,28x7x1	
2	C405	2306-000330	C-FILM,MPPF;7.7nF,3%,1.6KV,TP,28.5x18.5x	
2	C426	2306-000204	C-FILM,MPPF;430nF,5%,400V,TP,26x20.5x12.	
2	IC903	1203-001944	IC-POSI.FIXED REG.;78RM33,TO-220,3P,-,PL	
2	C806	2401-003031	C-AL;470uF,20%,450V,GP,BK,35x45mm,1	
2	C820	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM	
2	R807	2006-001083	R-CEMENT;120ohm,5%,5W,CJ,TP,14x10x27mm	
2	C423	2301-001192	C-FILM,MPPF;820nF,5%,400V,TP,29x18.5x25.	
2	C406	2306-000357	C-FILM,MPPF;8.2nF,5%,1.6KV,BK,20x9.5x17.	
2	JA702	3722-001425	JACK-PIN;2P,3.4mm,NI,BLK,-	
2	TOP	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
2	L808	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
2	L402	AA27-00067A	COIL HORIZ. WIDTH;-,240uH,YL9N 12x20 C:6	
2	CN801	3711-004721	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2	CN802	3711-004720	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	

ASSY CRT

1		AA94-05795A	ASSY CRT;A68QCP891X307,+400MG,29,ITC,2	
⚠ 2		AA03-00342A	CRT COLOR;A68QCP893X003,400MG,1.11MH,14.	
2		AA27-00128A	COIL DEGAUSSING;-,-,-,-,50T,7,-,29inch,2	
2		AA98-70011A	ASSY TBC WIRE(P);-,29INCH,NTSC,PAL,2P-WH	

ASSY PCB CONTROL

1		AA95-01530A	ASSY PCB CONTROL;,KS3A,XXA8-W8	
2	RY03	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RY05	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RY02	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RY04	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	PCB	AA41-00284C	PCB-CONTROL;CW32W8,FR-1,1L,C,1.6T,245X24	
2	LY01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	DZY02	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	SWY02	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
2	SWY03	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
2	SWY04	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
2	SWY05	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
2	SWY06	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
2	CNY02	AA39-20005A	LEAD CONNECTOR-ASSY;,3P,500,YBNH025-03,6	

ASSY HOLDER SPK

1		AA91-00150B	ASSY HOLDER SPK;DP,-,8OHM/15W,-,AA91-001	

Level	Loc. No.	Code No.	Description ; Specification	Remark

ASSY PCB CRT

1		AA95-01533A	ASSY PCB CRT;,KS3A,28,29,W8-Z4-A8-K8,5	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2	CN501A	3711-002641	CONNECTOR-HEADER;BOX,10P,1R,2.54mm,STRAI	
2	CN501A	AA39-00225A	LEAD CONNECTOR-ASSY;,10P,600MM,67096-010	
2	CN502A	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
2	CN502E	AA39-20029K	LEAD CONNECTOR-ASSY;,7P,400,67096-007,S,	
2	CNF01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
2	CNG01	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
2	IC501	HA96-50151A	ASSY-H/S;-,TR,AA61-10060A,TDA6101Q,-	
2	IC502	HA96-50151A	ASSY-H/S;-,TR,AA61-10060A,TDA6101Q,-	
2	IC503	HA96-50151A	ASSY-H/S;-,TR,AA61-10060A,TDA6101Q,-	
3		1201-000539	IC-VIDEO AMP;6101,ZIP,9P,-,SINGLE,-,PLAS	
3		6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	
3		6021-000154	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C	
3	BRC501	AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-,-	
2	ICG01	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
2	QG03	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
2	VA999	3704-000114	SOCKET-CRT;14P,29.1,35.5,SN,ISH09S/BK	
2		HA68-02176A	LABEL;LABEL	
2	C501	2201-000247	C-CERAMIC,DISC;0.015NF,5%,50V,C0G,TP,5X3	
2	C507	2201-000247	C-CERAMIC,DISC;0.015NF,5%,50V,C0G,TP,5X3	
2	C502	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C505	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C508	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	CF07	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C503	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C506	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C509	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C511	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	C512	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C515	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C526	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C514	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C518	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C519	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C520	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C521	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C522	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C523	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	CF01	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
2	CF02	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C516	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	CF03	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
2	CF04	2201-000653	C-CERAMIC,DISC;0.068NF,5%,50V,SL,TP,5X3M	
2	CF05	2301-000261	C-FILM,PEF;4.7nF,5%,100V,TP,10.5x12.5x6.	
2	CF06	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
2	CF08	2201-000604	C-CERAMIC,DISC;0.056NF,+100-0%,500V,SL,T	
2	CF10	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	CF12	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	CF14	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
2	CG01	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
2	CG04	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
2	CG02	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
2	CG03	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	D502	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D507	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D508	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D509	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D510	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D511	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D512	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF02	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF03	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DF04	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DG01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DZ503	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
2	KEZI	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
2	DZF01	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
2	DZF02	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
2	EL81	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL82	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL83	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	EL84	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL85	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL86	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL87	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL88	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL89	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL90	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL91	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL92	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL93	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL94	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT504	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT505	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT508	AA60-40014A	PIN-GT,ASSY;AUTO	
2	J501	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J503	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J505	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J506	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J507	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J508	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J509	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J510	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J511	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JG01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J512	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J513	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J514	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J515	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J516	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J517	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J518	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J519	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J520	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J524	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J526	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J527	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J528	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF06	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF07	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J529	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J530	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J521	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J523	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J531	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L501	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
2	LF02	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
2	LF01	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L505	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L506	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	LF03	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	PCB	AA41-00210D	PCB-CRT;CS29A6,FR-1,1L,D,1.6T,330x245,KS	
2	Q502	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	QG01	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q503	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	QF01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	QF02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	QF03	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	RF10	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF11	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R502	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R507	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R512	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R503	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R513	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R508	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R504	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R509	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R539	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R505	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R510	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R517	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF18	2003-000458	R-METAL OXIDE(S);100ohm,5%,2W,AF,TP,4x12	
2	R519	2002-001009	R-COMPOSITION;2.7Kohm,10%,1/2W,AA,TP,3.7	
2	R521	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF05	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R522	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R542	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R543	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R544	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R546	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R501	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF02	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF03	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF06	2001-000989	R-CARBON;820KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF07	2004-001989	R-METAL;620ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	RF08	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF09	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF12	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF13	2001-001179	R-CARBON(S);68KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF16	2001-001179	R-CARBON(S);68KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF14	2001-001071	R-CARBON(S);12KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF15	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF17	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RG06	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RG07	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF19	2003-001023	R-METAL OXIDE(S);120ohm,5%,2W,AF,TP,3.9x	
2	RF20	2003-002214	R-METAL OXIDE(S);680ohm,5%,2W,AG,TP,3.9x	
2	RF21	2003-002214	R-METAL OXIDE(S);680ohm,5%,2W,AG,TP,3.9x	
2	RF22	2003-002214	R-METAL OXIDE(S);680ohm,5%,2W,AG,TP,3.9x	
2	RF23	2003-000746	R-METAL OXIDE(S);56ohm,5%,2W,AF,TP,4x12m	
2	RF24	2003-000746	R-METAL OXIDE(S);56ohm,5%,2W,AF,TP,4x12m	
2	RF25	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	RG01	2004-001397	R-METAL(S);4.7Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	RG02	2004-002022	R-METAL(S);51Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	RG04	2004-002022	R-METAL(S);51Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	RG03	2004-001987	R-METAL(S);4.3Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	RG05	2001-001163	R-CARBON(S);560OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RG08	2001-001163	R-CARBON(S);560OHM,5%,1/2W,AA,TP,2.4X6.4	
2	L503	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L504	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	LF04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	LF05	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	EY501	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	R518	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R526	2004-000500	R-METAL;2.7Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R527	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
2	DZG501	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	L507	2701-000215	INDUCTOR-AXIAL;8.2uH,10%,2.5x3.4mm	
2	SG501	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG503	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG504	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG505	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2		HA98-00054A	ASSY SUB PART;ASSY SUB PART,KS3A,PCB,CRT	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
2	QF04	HA96-50149A	ASSY-H/S;-,AA62-30013A,2SC2344,-	
3		0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
3	SCR09	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S09	AA62-30013A	HEAT SINK-ES;-,A6063 EXTR,-,-,45(21) T02	
2	QF05	HA96-50149B	ASSY-H/S;-,TR,AA62-30013A,2SA1011,-	
3	QV10	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
3	SCR10	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S10	AA62-30013A	HEAT SINK-ES;-,A6063 EXTR,-,-,45(21) T02	
2	C510	2401-001525	C-AL;47uF,20%,250V,GP,BK,16x25mm,7.	
2	R523	2008-000267	R-FUSIBLE(S);2.4ohm,5%,2W,AA,TP,3.9x10mm	
2	CF11	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	JA501	3722-001503	JACK-PIN;1P,1PI,NI,RED,SCR-JACK	
2	QG02	0502-000244	TR-POWER;KSA940,PNP,1.5W,TO-220,-,40-14	
2	C513	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	

Level	Loc. No.	Code No.	Description ; Specification	Remark

ASSY ETC-PCB A/V BOARD

1		AA95-01521A	ASSY ETC-PCB A/V BOARD;,28W8,29A8,KS3A,5	
2	JH701	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
2	JA701	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
2	CN701	AA39-20068G	LEAD CONNECTOR-ASSY;,8P,700MM,YBNH025-08	
2	CN703	AA39-20069A	LEAD CONNECTOR-ASSY;,5P,500,YBNH025-05,6	
2	C701	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C702	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	L701	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L702	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L703	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L704	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L709	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	R701	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
2	R702	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
2	C703	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C704	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C705	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
2	C706	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
2	L707	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L708	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	PCB	AA41-00155B	PCB-SIDE AV;CS29A6,FR-1,1L,B,1.6T,245x24	
2	CN704	AA39-20499D	LEAD CONNECTOR-ASSY;,4P,400,YBNH025-04,S	

ASSY ETC-PCB SUB POWER

1		AA95-01546A	ASSY ETC-PCB SUB POWER;,29A8,28-32W8,KS3	
⚠ 2	SW811S	3403-001107	SWITCH-PUSH;250V,5A,DPST,-,KDC-A04	
⚠ 2	PD812S	AA39-20179F	LEAD CONNECTOR-ASSY;,3(2)P,400MM,YFH800-	
2	RMY01	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
2	LDY01	AA96-00461A	ASSY LED GUIDE;-,-,SL-255D,RED/GRN	
2	CNY01	AA39-20546C	LEAD CONNECTOR-ASSY;,5P,500/480MM,YBNH25	
2	DZY01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZY03	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	RY01	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	CY01	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
2	PCB	AA41-00285B	PCB-POWER S/W;WS32W8,FR-1,1L,B,1.6T,245x	
2	EL01	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL02	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL03	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL04	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	GTY01	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GTY02	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GTY03	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GTY08	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GTY09	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GTY10	AA60-40014A	PIN-GT,ASSY;AUTO	
2	JY01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	

ASSY-KNOB-CONTROL

1		HA91-00910A	ASSY-KNOB-CONTROL;HIPS,HB,GRY,32W8	
2		HA64-02497A	KNOB CONTROL;,32W8,HIPS,HB,GRY	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00012A	LP-RESIN;,M BATCH,WILSON 6053-GY-60,GRY	
2	KC+PCB	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	

ASSYPCB-PFC

1		HA94-05786B	ASSYPCB-PFC;28W8/Z4-29A8/K8,50HZ,5786A	
2	EYP07	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP08	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP09	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP10	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP11	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP12	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP13	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP14	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP15	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP16	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP17	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP18	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP01	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP02	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP03	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP04	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP05	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP06	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	PCB	AA41-00404A	PCB-PFC;CS2539,FR-1,1L,A,1.6T,330x245,KS	
2	JP801	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JP802	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	CNP02	AA39-00236A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YHL500-	
2	PFT01	AA27-00116A	COIL CHOKE;CODE_NO,-,35mH,-0, +5%,-,2.8O	
2		HA98-600020	ASSY-SUB,PART;KS4A,PFC PCB	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2		HA61-00987A	HOLDER-PFC;32W8,29A8,28W8,HIPS,ALLFLAT	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2	CNP02	3711-004721	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2		6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	CNP01	AA39-00235A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YHL500-	
2	CNP01	3711-004720	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
⚠ 2	LX803S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,+-	
⚠ 2	CX803S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	

ASSY-CABINET(COM)

1		AA90-01095D	ASSY-CABINET(COM);KS3A,VL-1823,29A8D	
2		HA91-00945C	ASSY CABINET BACK;,KS3A,VL-1823,29A8	
3		AA64-00894G	INLAY-BACK;D3,PS SHEET,T0.3,-,-,BLK,SCAR	
3		HA59-00244A	TERMINAL-BOARD;TERMINAL-BOARD;32W8,HIPS,	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
3		HA64-02446C	CABINET BACK;29A8,VL-1823,GRY	
4		AA81-00096A	RESIN-A;VL-1823,G5433,A	
2		AA65-30113A	CLAMPER CORE-D,COIL;-,NYLON 66,V2,-,BLK,	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	
2	CRT+CF	AA60-10050V	SCREW-ASSY;-,SWRCH18A,M6,L30,HH,+,WC,-,Z	
2	CF+SPK	AA60-10050A	SCREW-ASSY;-,SWRCH18A,M4,L25,RH,+,WP,-,Z	
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	rating	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	CF+AV	6003-001135	SCREW-TAPTITE;TH,+,B,M4.0,L15,BLK,SWRCH1	
2	KC+POW	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	KC+CON	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	CHL+DF	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	CF+CHR	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW	
2	CB+TB	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CF+KC	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CB+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	TB+SCR	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2		HA61-00392C	RAIL-L;32W8,HIPS,HB,NTR	
3		HA83-00013A	LP-RESIN HIPS;,NTR,HB,DOW A-TECH,IEC65	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		HA61-00392B	RAIL-L;SEH 32W8,ABS HB,NTR	
3		HA83-00013A	LP-RESIN HIPS;,NTR,HB,DOW A-TECH,IEC65	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	

Level	Loc. No.	Code No.	Description ; Specification	Remark

ASSY CABINET FRONT

1		HA91-00882K	ASSY CABINET FRONT;,29A8,PLANO,SM,VDS,CO	
2	CF+CM	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	WR+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2		HA64-00915B	WINDOW-REMOCON;32W8,PC,-,-,-,-VIOLET,-	
3		HA83-00009A	LP-RESIN PC;,LEXAN 121R,VIOLET	
2		AA64-02505A	KNOB POWER;32W8,HIPS,HB,BLK	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00007A	LP-RESIN;,M BATCH,WILSON 902-BK-60,BLK	
2		HA64-00916B	INDICATOR-LED;32W8,ACRYL,-,CLR,-,-,-	
3		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
2		AA64-01062A	BADGE-BRAND;32W8,AL FORGING,-,-,L65,-,SI	
2		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
2		AA61-60003T	SPRING ETC-CS;-,SUS304,-,-,OD7,N5,OD7,-,	
2		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2		AA64-60399C	INLAY-AV;-,PS SHEET,T0.3,-,-,BLK,S/GRAY	
2		AA64-60446C	INLAY-PC,JACK;29A6,PS SHEET,T0.5,BLK,SIL	
2		AA64-60445Q	INLAY AV;72A6,PS SHEET,-,-,-,BLK,KS3A 50	
2		AA64-02435B	CABINET-FRONT;29A8,HIPS,HB,SV-907P,GRY,C	
3		HA83-00029A	LP-MARKING PAINT;,METALLIC-SILVER,SV-907	
3		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		HA64-00006C	CABINET-MASK;29A8,SM,PLANO,HIPS,HB,SV-90	
3		HA83-00029A	LP-MARKING PAINT;,METALLIC-SILVER,SV-907	
3		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50	

ASSY-ACCESSORY

1		HA94-01594E	ASSY-ACCESSORY;KS3A,FLAT,XEC,DOLBY,50HZ	
2		4301-000121	BATTERY-MN;1.5V,-,AAA,10.5x44.5m,HOLDER	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA68-02124A	LABEL;A/P120(G),70,69,WHITE,XECCO	
2		HA68-00971A	LABEL-BACK,DOLBY;A/P100(G),SILVER-BLACK	

REMOCON

1		AA59-00116B	REMOCON;-,TM57,37,D3/D4,L/GRAY,S/S,GRA	

ASSY POWER CORD

⚠ 1		AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	

ASSY PACKING

1		AA90-01135A	ASSY PACKING;29A8	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		HA69-01500A	CUSHION-SET;29A8,PS,C=0.02	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	
2		AA69-00744F	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1400,H1	
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE	
2		HA69-00480B	PACKING-CASE;29A8,CB D-4 AB,-,-,YE	
2		HA83-00057B	LP-TAPE-CELLULOSE;,HA02-030010,T0,046,W7	
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM	

7-3 WS28V63NS8XXEC

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-05586B	ASSY PCB MAIN(OPT);WS28W7N,KS3A/H,TH,AK	
⚠ 2	T801S	AA26-00046A	TRANS SWITCHING;-,-,-,AC90~260V,DC135/16	
⚠ 2	IC201S	1204-001634	IC-VIDEO PROCESS;VDP3120B-C3,DIP,64P,-,P	
2	HC401	HA96-00275A	ASSY-H/S;-,COMPLEX,AA62-00051A,KSD5703,	
3		AA62-00051A	HEAT SINK-PS;-,-,-,SILVER,HOLE 31mm,ALL,	
⚠ 3	D414	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
3	Q401	0502-001136	TR-POWER;KSD5703,NPN,70W,TO-3PF,ST,8-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	T401	AA26-50001L	TRANS-HORIZ.DRIVE;-,-,-,29mH,-,-,133uH,-	
⚠ 2	TU01S	AA40-00079A	TUNER;TCPW3001PD16A(S),PAL,181CH,38.	
2	IC602	HA96-50369B	ASSY-H/S;-,-,AA62-30181F,TDA7297,-	
3		1201-001064	IC-POWER AMP;7297,ZIP,15P,-,DUAL,32dB,PL	
3		AA62-30181F	HEAT SINK-ES;-,AL6063 EXTR.,2,WHT,50MM,-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	IC601	1204-001775	IC-SOUND PROCESSOR;MSP3410D-C5 9458 ,SDI	
⚠ 2	T444S	AA26-00008A	TRANS FBT;-,FUH-34A001(S),34INCH,135V	
⚠ 2	PT801S	1404-001156	THERMISTOR-PTC;9OHM,+30%/-20%,220VRMS,27	
2	C806	2401-001137	C-AL;330uF,20%,400V,GP,BK,30x45mm,1	
2	L402	AA27-00067A	COIL HORIZ. WIDTH;-,240uH,YL9N 12x20 C:6	
2	C405	2306-000357	C-FILM,MPPF;8.2nF,5%,1.6KV,BK,20x9.5x17.	
2	C406	2306-000330	C-FILM,MPPF;7.7nF,3%,1.6KV,TP,28.5x18.5x	
2	C426	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
2	L411	AA27-30001F	COIL LINEARITY;-,22uH,DR1011,PI0.45,25.5	
2	L408	AA27-40003L	COIL HORIZ. WIDTH;-,1.0mH,DR14x20,2UEW0.	
2	L405	AA27-00057A	COIL HORIZ. WIDTH;-,10mH,YL-9N 15x27.5 C	
2	C423	2301-001192	C-FILM,MPPF;820nF,5%,400V,TP,29x18.5x25.	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ 2	LX801S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,+-	
2	IC301	HA96-50406B	ASSY-H/S;ASSY-H/S;-,AA62-30180B,LA7845	
3		1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
3		AA62-30180B	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,70MM,-,	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	HC801	HA96-00274A	ASSY-H/S;-,COMPLEX,AA62-00053A,FMLG12S	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00053A	HEAT SINK-PS;-,-,-,SILVER,HOLE 22mm,ALL,	
⚠ 3	D802	0402-001230	DIODE-RECTIFIER;FMG-G2CS,1000V,3A,TO-220	
⚠ 3	D805	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	D806	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	D807	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	IC802	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC803	1203-001697	IC-VOLTAGE REGULATOR;78R08,TO-220,4P,-,P	
⚠ 2	IC804	HA96-00243C	ASSY-H/S;-,REGULATOR,AA62-00045A,KA7806	
3		1203-000284	IC-POSI.FIXED REG.;7806,TO-220,3P,-,PLAS	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-,	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	IC902	1103-001171	IC-EEPROM;L51DC,16KBit,DIP,8P,300MIL,10m	
2	IC901	AA09-00181A	IC MICOM;SIM806EW3-A035,SIM806EW3-A035,5	
⚠ 2	IC801S	HA96-50371C	ASSY H/S;-,-,AA62-30181H,KA3A1265R,-	
3		AA13-00101A	IC HYBRID;KA3S1265RD,CN5039,5PIN,-50TO12	
3		AA61-10386A	BRACKET-IC;-,SECC 100,T1.0,-,-,-,KA2S068	
3		AA62-30197D	HEAT SINK-ES;DP,-,-,-,AA62-30181H,-,-,-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	IC903	1203-001944	IC-POSI.FIXED REG.;78RM33,TO-220,3P,-,PL	
2	C407	2301-001338	C-FILM,MPE-PPF;0.68nF,5%,1.6kV,TP,28x7x1	
⚠ 2	D801S	0402-001399	DIODE-BRIDGE;GSIB660,600V,6A,SIP-4,BK	
2	Q402	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
⚠ 2	PC801S	0604-001038	PHOTO-COUPLER;TR,130-260%,200mW,DIP-4,ST	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
2	C815	2401-003602	C-AL;220uF,20%,160V,GP,BK,22x25mm,1	
⚠ 2	CY802S	2201-002002	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,TP,16X	
2	JA701	3722-000195	JACK-SCART;42P,-,SN,BLK,NO	
2	C820	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM	
2	R807	2006-001083	R-CEMENT;120ohm,5%,5W,CJ,TP,14x10x27mm	
2	L808	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
⚠ 2	IC401	1202-000103	IC-VOLTAGE COMP.;393,DIP,8P,300MIL,DUAL,	
2	Q404	HA96-00437A	ASSY-H/S;ASSY-H/S;AA62-00076A,IRF620	
3		0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		HA62-00076A	HEAT SINK;AL,100Hz,T1.0,10,40	
2		AA98-00245A	ASSY SUB PART;S51A,PCB MAIN(OPT)	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2	C105	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C101	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C103	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C228	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C230	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C809	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C810	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C811	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C202	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C205	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C920	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C231	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C215	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C630	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C631	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C645	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C652	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C603	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C708	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C214	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C216	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C605	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C620	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C635	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C646	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C829	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C837	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C839	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C916	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C308	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C914	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C831	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C825	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C217	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C636	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C905	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C607	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C608	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C903	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C211	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C212	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C416	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C213	2301-000247	C-FILM,PEF;33nF,5%,50V,TP,8.1x4.5x13mm,5	
2	C218	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C219	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C220	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C221	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C222	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C223	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C901	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C921	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C922	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C919	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C924	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C233	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C234	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C235	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C907	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C909	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C237	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C841	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C201	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C303	2201-002031	C-CERAMIC,DISC;0.005NF,0.5PF,50V,C0G,TP,	
2	C224	2201-002031	C-CERAMIC,DISC;0.005NF,0.5PF,50V,C0G,TP,	
2	C225	2201-002031	C-CERAMIC,DISC;0.005NF,0.5PF,50V,C0G,TP,	
2	C304	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C305	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
2	C821	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C902	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C302	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C401	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C403	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C421	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C402	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
2	C404	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
2	C408	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	
2	C414	2401-002597	C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
2	C418	2401-002597	C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
2	C422	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
2	C424	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
2	C601	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
2	C610	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C611	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C415	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C612	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C613	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C617	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C917	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C413	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C622	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C625	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C626	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C628	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C623	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C624	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C627	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C629	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C642	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C644	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C701	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C638	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C639	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C249	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C632	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
2	C634	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C826	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C832	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C838	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C637	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C640	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C641	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C643	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C647	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
2	C649	2301-000108	C-FILM,PEF;1.5nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C804	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
2	C805	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
2	C807	2301-001397	C-FILM,PPF;2.2nF,5%,1.2kV,TP,15x8.5x13.5	
2	C814	2201-000406	C-CERAMIC,DISC;0.27NF,10%,2KV,Y5P,TP,6.3	
2	C816	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
2	C817	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C819	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C822	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C818	2401-000722	C-AL;2200uF,20%,25V,WT,TP,16x25,7.5	
2	C910	2201-000980	C-CERAMIC,DISC;0.03NF,5%,50V,C0G,TP,5X3M	
2	C911	2201-000980	C-CERAMIC,DISC;0.03NF,5%,50V,C0G,TP,5X3M	
2	C913	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C915	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C918	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C210	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D202	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D207	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D208	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D209	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D210	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D211	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D602	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D804	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DZ402	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D906	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D405	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D411	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D803	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D816	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
⚠ 2	D404	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
⚠ 2	D402	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
⚠ 2	D403	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D406	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D810	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D811	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D907	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D413	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
⚠ 2	D801	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
2	DZ201	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ202	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ802	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ902	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ601	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ603	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ906	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ907	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ909	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ910	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ604	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ605	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ908	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ203	0403-001321	DIODE-ZENER;MTZJ6.8C,6.66-7.01V,500mW,DO	
2	DZ302	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ303	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ304	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ305	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ306	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ804	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ401	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
2	DZ801	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ808	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ204	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ205	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT102	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT301	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT302	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT401	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT402	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT801	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT103	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT409	AA60-40014A	PIN-GT,ASSY;AUTO	
2	J102	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J103	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J105	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J108	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J111	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J112	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J113	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J114	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J115	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J116	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J117	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J119	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J122	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J123	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J124	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J203	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J205	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J206	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J207	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J208	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J209	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J210	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J212	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J213	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J214	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J216	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J217	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J218	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J219	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J222	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J223	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J224	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J225	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J226	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J227	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J228	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J229	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J230	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J232	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J234	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J236	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J237	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J238	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J239	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J242	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J244	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J246	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J247	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J248	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J401	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J402	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J404	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J409	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J412	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J414	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J416	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J421	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J422	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J424	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J428	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J601	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J602	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J603	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J604	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J606	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J607	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J611	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J614	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J615	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J616	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J617	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J618	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J619	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J620	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J621	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J622	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J624	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J627	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J629	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J631	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J632	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J703	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J704	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J708	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J715	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J716	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J717	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J805	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J806	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J807	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J810	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J811	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J816	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J819	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J820	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J821	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J824	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J826	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J829	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J830	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J831	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J832	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J833	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J909	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J911	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J912	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J913	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J915	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J916	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J917	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J924	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J925	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J926	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J927	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J928	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J932	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J933	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J934	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J936	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J939	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J941	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J942	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R939	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J714	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J249	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	D908	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J835	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J425	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J633	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J818	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J612	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L610	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J937	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J918	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J626	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J126	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J118	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J101	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J253	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J943	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J944	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J705	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J707	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J127	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J605	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J608	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J609	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L107	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J902	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
⚠ 2	D407	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J407	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J419	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J801	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J802	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J803	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J804	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J211	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J241	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J630	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L410	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J834	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J204	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J701	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J817	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L413	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R926	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J940	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	EY301	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY302	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY303	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY304	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY413	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY418	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY424	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY425	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY426	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY427	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY428	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY429	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY430	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY431	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY432	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY433	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY434	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY435	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY436	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY437	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY438	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY439	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY440	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY441	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY442	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY443	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY444	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY445	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY446	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY447	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY448	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY449	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY450	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY451	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY452	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY453	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY454	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY455	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY456	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY457	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY458	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY601	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY602	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY603	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY604	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY701	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY702	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY703	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY704	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY804	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY805	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY806	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY811	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY812	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY814	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY815	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY816	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY817	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY820	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY826	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY831	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY832	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY834	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY835	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY836	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY837	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY838	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY839	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY840	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY841	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY842	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY844	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY845	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY846	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY847	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY848	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY849	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY854	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY855	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY856	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY857	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY858	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY859	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	TOP1	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	TOP2	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL401	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL402	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL405	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL406	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL803	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL805	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL806	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL807	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL808	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL809	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL810	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	EL811	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	R236	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R237	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R238	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R247	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R622	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R621	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R935	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R202	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R243	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R245	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R246	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R310	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R716	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R606	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R602	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R601	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R620	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R629	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R309	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R609	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R952	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R940	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R941	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R942	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R947	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R948	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R102	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R103	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R604	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R605	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R610	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R611	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R612	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R613	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R628	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R627	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R706	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R707	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R708	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R907	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J920	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J904	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R925	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R955	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 2	RR430S	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R418	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
⚠ 2	RY801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY802S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	VP801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	X901	2801-003728	CRYSTAL-UNIT;6MHz,30ppm,28-AAM,20pF,40oh	
2	L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C707	2401-000939	C-AL;22uF,20%,25V,GP,TP,5x11,5	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L406	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L907	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L711	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L108	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L109	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L222	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L302	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L804	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L809	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J901	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L303	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L207	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L412	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J406	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L407	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L601	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L609	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L201	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L604	2701-000169	INDUCTOR-AXIAL;3.9uH,10%,2.5x3.4mm	
2	L905	2701-000211	INDUCTOR-AXIAL;68uH,10%,2.5x3.4mm	
2	Q201	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q203	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q906	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q908	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q204	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q907	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	R244	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R954	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R823	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R216	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R234	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R235	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R603	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R817	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R924	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R252	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R726	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R902	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R816	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R228	2001-000117	R-CARBON(S);680HM,5%,1/2W,AA,TP,2.4X6.4M	
2	R301	2004-001397	R-METAL(S);4.7Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R423	2004-001397	R-METAL(S);4.7Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R303	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R828	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R314	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R411	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R412	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R421	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R913	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R426	2003-000540	R-METAL OXIDE(S);1Kohm,5%,2W,AF,TP,4x12m	
2	R434	2003-000664	R-METAL OXIDE(S);33ohm,5%,2W,AF,TP,4x12m	
2	R614	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R615	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R616	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R617	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R226	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R931	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R812	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R831	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R956	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R214	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R704	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R705	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R242	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R802	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R803	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R804	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R805	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R806	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R813	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R832	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R810	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R819	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R820	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R822	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R824	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R825	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R901	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R905	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R906	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R921	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R927	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R928	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R937	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R724	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R725	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R251	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R223	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R248	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R249	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R250	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R207	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R911	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R922	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R923	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	C411	2301-000104	C-FILM,PEF;1.2NF,5%,50V,TP,6.5X3.0X5.5MM	
2	C412	2301-000313	C-FILM,PEF;8.2nF,5%,100V,TP,7x3.2x7mm,5m	
2	C427	2401-002267	C-AL;2.2uF,20%,250V,GP,TP,8x11.5,5	
2	C833	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C229	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
2	CN901	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
2	CW901	2503-000156	C-NETWORK;100pFx4,20%,50V	
2	D203	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D204	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D205	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D206	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D901	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D902	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D903	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D904	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	DZ803	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
⚠ 2	FA802S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
2	HIC202	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC203	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC204	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC201	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	R302	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R409	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	R410	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	R413	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R424	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R425	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R405	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R827	2008-000284	R-FUSIBLE(S);0.1OHM,10%,2W,AF,TP,3.9X10M	
2	R829	2008-001029	R-FUSIBLE(S);5.6ohm,5%,2W,AF,TP,3.9x10mm	
2	R835	2003-002181	R-METAL OXIDE(S);68Kohm,5%,2W,AG,TP,3.9x	
2	R836	2003-002181	R-METAL OXIDE(S);68Kohm,5%,2W,AG,TP,3.9x	
2	R433	2003-001042	R-METAL OXIDE(S);5.6Kohm,5%,2W,AF,TP,3.9	
2	R717	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R105	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	X201	2801-003432	CRYSTAL-UNIT;20.25MHZ,30PPM,28-AAM,13PF,	
2	X601	2801-003903	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,12pF	
2	IC904	1203-001943	IC-VOL. DETECTOR;7025,TO-92,3P,-,PLASTIC	
2	PCB	AA41-00168H	PCB-MAIN;CS29A6,FR-1,1L,H,1.6T,330X245,K	
2	Q909	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
2	Q910	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
2	R403	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
2	L705	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L706	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L605	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L606	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L607	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L608	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L701	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	R106	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R313	2004-001137	R-METAL;6.8Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R710	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R241	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R315	2004-004970	R-METAL(S);62Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R811	2004-001408	R-METAL(S);91Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	R809	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R432	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	L901	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L903	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L904	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L909	2701-000191	INDUCTOR-AXIAL;47uH,10%,2.5x3.4mm	
2	L908	2701-000191	INDUCTOR-AXIAL;47uH,10%,2.5x3.4mm	
2	R818	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
2	CN702	3711-002647	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	
2	C656	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
2	C657	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
2	C306	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	R422	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
2	C621	2401-002458	C-AL;1000uF,20%,35V,GP,TP,16x25,7.5	
2	C824	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C823	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C808	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C115	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C116	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C244	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C245	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	L209	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L210	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L801	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
2	L806	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
2	R945	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R946	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C104	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
2	R210	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C835	2401-002289	C-AL;470uF,20%,35V,WT,TP,10x20,5	
2	C840	2401-002212	C-AL;10uF,20%,25V,WT,TP,5x11,5	
2	C827	2401-002212	C-AL;10uF,20%,25V,WT,TP,5x11,5	
2	C301	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
2	C106	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
2	DZ602	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	R808	2001-001079	R-CARBON(S);15OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	C248	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	C246	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	R304	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
2	C102	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
2	L208	2701-000147	INDUCTOR-AXIAL;2.2uH,5%,2.4x3.4mm	
2	C247	2202-000849	C-CERAMIC,MLC-AXIAL;0.018NF,5%,50V,C0G,T	
2		HA68-02176A	LABEL;LABEL	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	C654	2201-000611	C-CERAMIC,DISC;0.056NF,5%,50V,C0G,TP,7X3	
2	R305	2003-002205	R-METAL OXIDE(S);330ohm,5%,2W,AG,TP,3.9X	
2	R306	2003-002205	R-METAL OXIDE(S);330ohm,5%,2W,AG,TP,3.9X	
2	R401	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
2	R402	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
2	R414	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R420	2004-001406	R-METAL(S);8.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R428	2001-001191	R-CARBON(S);820KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R429	2001-001103	R-CARBON(S);20KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R436	2003-002008	R-METAL OXIDE(S);18Kohm,5%,2W,AF,TP,3.9x	
2	R607	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R608	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	CN903	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
2	C409	2301-001268	C-FILM,PPF;33nF,5%,630V,TP,20x11x17,7.5	
2	CN502	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
2	R821	2004-001891	R-METAL(S);133Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	C410	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	R213	2001-000232	R-CARBON;1.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R404	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
2	C425	2303-001026	C-FILM,PPF;33nF,10%,400V,TP,20x15x8,7.5	
2	DZ806	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
2	R417	2004-001382	R-METAL(S);13Kohm,1%,1/2W,AA,TP,2.4x6.4m	

Level	Loc. No.	Code No.	Description ; Specification	Remark
⚠ 2	FA803S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
2	J914	2001-000674	R-CARBON;360OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R212	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
2	C925	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C420	2305-001003	C-FILM,MPEF;10nF,5%,250V,TP,13x4.5x9mm,7	
2	C828	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
2	J919	2701-000183	INDUCTOR-AXIAL;39uH,5%,2.5x3.4mm	
2	C203	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	R944	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	L910	2701-000215	INDUCTOR-AXIAL;8.2uH,10%,2.5x3.4mm	
2	C926	2202-000154	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
⚠ 2	FP801S	3601-000297	FUSE-CARTRIDGE;250V,5A,TIME-LAG,GLASS,5.	
⚠ 2	RX801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
2	R415	2004-004083	R-METAL(S);3.6Kohm,2%,1/2W,AA,TP,2.5x6.5	
2	D408	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
2	R701	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R702	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R703	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	CN501	3711-002641	CONNECTOR-HEADER;BOX,10P,1R,2.54mm,STRAI	
2	CN801	3711-004721	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2	CN802	3711-004720	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2	TOP	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	

ASSY CRT

1		HA94-01652A	ASSY CRT;-,-,28,ITC,W66EJU023X215,NON-	
⚠ 2		AA03-00106A	CRT COLOR;W66EJU023X215,+380mG,1.15mH,12	
2		AA39-20518A	LEAD CONNECTOR-ASSY;,6(4)P,350MM,YFH806-	
2		AA27-00020A	COIL-DEGAUSSING;-,28,12OHM,55T,L3000,E	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-70008D	ASSY TBC WIRE(P);-,28WIDE,PAL,2P,-	

ASSY PCB MISC-CONTROL

1		AA94-12332A	ASSY PCB MISC-CONTROL;28V6,KS3A,PAL	
2		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
2		0204-000442	SOLVENT;1M-1000,C3H7OH,96,-	
2		0204-001024	FLUX;DF-98TVS,-,20%,-	
2	LDY01	0601-000198	LED;ROUND,RED/GRN,5.0mm,630/565nm	
⚠ 2	PD811S	3711-004696	CONNECTOR-HEADER;NOWALL,3P,1R,5MM,ANGLE,	
⚠ 2	PD812S	3711-004697	CONNECTOR-HEADER;NOWALL,3P,1R,5MM,ANGLE,	
2	Bracke	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	
2	Bracke	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
2	CNY02	AA39-20005B	LEAD CONNECTOR-ASSY;,3P,300MM,YBNH025-03	
2	CNY01	AA39-20069A	LEAD CONNECTOR-ASSY;,5P,500,YBNH025-05,6	
2	CN811	AA39-20179A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YFH800-	
2		AA61-00530B	BRACKET-MASTER;25M6,29M6,SECC	
2		AA97-13500A	ASSY AUTO-CONTROL;32V6,KS3A,PAL(SEH)	
3	DY02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	DY01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	DZY01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
3	DZY02	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
3	RY03	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RY05	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RY01	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
3	RY02	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RY04	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	LY01	2701-000136	INDUCTOR-AXIAL;18uH,10%,2.5x3.4mm	
3	PCB	AA41-00799A	PCB-CONTROL;28V6/32V6,CEM-1,1L,A,1.6T,24	
3	EL01	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	EL02	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	EL03	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	EL04	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	SWY02	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY03	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY04	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY05	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY06	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	CY01	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	

ASSY PCB CRT

1		AA95-01532A	ASSY PCB CRT;,KS3A,28,32,W5-W6-W7,50HZ	
2	VA999	3704-000114	SOCKET-CRT;14P,29.1,35.5,SN,ISH09S/BK	
2	QF04	HA96-50149A	ASSY-H/S;-,AA62-30013A,2SC2344,-	
3		0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
3	SCR09	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S09	AA62-30013A	HEAT SINK-ES;-,A6063 EXTR,-,-,45(21) T02	
2	QF05	HA96-50149B	ASSY-H/S;-,TR,AA62-30013A,2SA1011,-	
3	QV10	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
3	SCR10	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S10	AA62-30013A	HEAT SINK-ES;-,A6063 EXTR,-,-,45(21) T02	
2	IC501	HA96-50151A	ASSY-H/S;-,TR,AA61-10060A,TDA6101Q,-	
2	IC502	HA96-50151A	ASSY-H/S;-,TR,AA61-10060A,TDA6101Q,-	
2	IC503	HA96-50151A	ASSY-H/S;-,TR,AA61-10060A,TDA6101Q,-	
3		1201-000539	IC-VIDEO AMP;6101,ZIP,9P,-,SINGLE,-,PLAS	
3		6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	
3		6021-000154	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C	
3	BRC501	AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-	
2		HA68-02176A	LABEL;LABEL	
2	GT501	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT507	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT503	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT504	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT505	AA60-40014A	PIN-GT,ASSY;AUTO	
2	EL81	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL82	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL83	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL84	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL85	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL86	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL87	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL88	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL89	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL90	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL91	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL92	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL93	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	J501	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J502	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J503	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J506	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J507	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J508	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J509	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J510	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J511	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L502	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J512	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J513	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J514	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J516	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J520	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J521	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J523	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J524	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J526	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J527	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J528	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J529	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J530	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R546	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF06	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF07	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R504	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R509	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J515	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R539	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	DF01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DF04	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D502	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D507	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D508	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D509	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D510	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D511	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D512	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF02	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF03	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DZ503	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
2	Q501	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	QF03	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	QF01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	QF02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	RF09	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF12	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF10	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF11	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R521	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R526	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF08	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF03	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R529	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R530	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R536	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF05	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF02	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R520	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF06	2001-000989	R-CARBON;820KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R517	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF14	2001-001071	R-CARBON(S);12KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R502	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R507	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R512	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
2	RF15	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF17	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF13	2001-001179	R-CARBON(S);68KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF16	2001-001179	R-CARBON(S);68KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R503	2001-001194	R-CARBON(S);82KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R508	2001-001194	R-CARBON(S);82KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R513	2001-001194	R-CARBON(S);82KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R505	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R510	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	RF18	2003-000458	R-METAL OXIDE(S);100ohm,5%,2W,AF,TP,4x12	
2	RF23	2003-000746	R-METAL OXIDE(S);56ohm,5%,2W,AF,TP,4x12m	
2	RF24	2003-000746	R-METAL OXIDE(S);56ohm,5%,2W,AF,TP,4x12m	
2	RF19	2003-001023	R-METAL OXIDE(S);120ohm,5%,2W,AF,TP,3.9x	
2	RF20	2003-001045	R-METAL OXIDE(S);680ohm,5%,2W,AF,TP,3.9x	
2	RF21	2003-001045	R-METAL OXIDE(S);680ohm,5%,2W,AF,TP,3.9x	
2	RF22	2003-001045	R-METAL OXIDE(S);680ohm,5%,2W,AF,TP,3.9x	
2	RF25	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	RF07	2004-001989	R-METAL;620ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	CF01	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
2	CF03	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
2	CF06	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
2	C503	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C506	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C509	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	CF04	2201-000653	C-CERAMIC,DISC;0.068NF,5%,50V,SL,TP,5X3M	
2	CF08	2201-000653	C-CERAMIC,DISC;0.068NF,5%,50V,SL,TP,5X3M	
2	CF14	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
2	CF02	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C516	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C518	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C519	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C520	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C521	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C522	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C523	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	CF05	2301-000261	C-FILM,PEF;4.7nF,5%,100V,TP,10.5x12.5x6.	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C502	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C505	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C508	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	CF07	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C514	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C512	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C515	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C526	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C511	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	CF10	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	CF12	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	L501	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
2	LF02	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
2	LF01	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L505	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L506	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	PCB	AA41-00210D	PCB-CRT;CS29A6,FR-1,1L,D,1.6T,330x245,KS	
2	DZF01	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
2	DZF02	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
2	R522	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R527	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R525	2003-001043	R-METAL OXIDE(S);510ohm,5%,1W,AF,TP,2.5x	
2	R518	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	L503	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L504	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	LF04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	LF05	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	R519	2002-001009	R-COMPOSITION;2.7Kohm,10%,1/2W,AA,TP,3.7	
2	L507	2701-000215	INDUCTOR-AXIAL;8.2uH,10%,2.5x3.4mm	
2	SG501	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG503	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG504	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG505	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	R501	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
2		HA98-00003A	ASSY SUB PART;ASSY-SUB,PART;S53A,PCB,CRT	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
2	GT507	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
2	CN501A	AA39-00225A	LEAD CONNECTOR-ASSY;,10P,600MM,67096-010	
2	CN501A	3711-002641	CONNECTOR-HEADER;BOX,10P,1R,2.54mm,STRAI	
2	CN502A	AA39-20029K	LEAD CONNECTOR-ASSY;,7P,400,67096-007,S,	
2	CNF01	AA39-20033C	LEAD CONNECTOR-ASSY;,3(2)P,200,67096-003	
2	CF11	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	C513	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
2	R523	2008-000265	R-FUSIBLE(S);1ohm,5%,2W,AA,TP,3.9x10mm	
2	C510	2401-001525	C-AL;47uF,20%,250V,GP,BK,16x25mm,7.	
2	JA501	3722-001503	JACK-PIN;1P,1PI,NI,RED,SCR-JACK	
2	CNF01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
2	CN502A	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	

ASSY ETC-PCB A/V BOARD

1		AA95-01518A	ASSY ETC-PCB A/V BOARD;,29K8,KS3A,50HZ	
2	JH701	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
2	JA701	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
2	CN704	AA39-00070A	LEAD CONNECTOR-ASSY;,4P,200MM,YBNH250-04	
2	CN705	AA39-20009E	LEAD CONNECTOR-ASSY;,1P,600,YFH800-01,16	
2	CN701	AA39-20068G	LEAD CONNECTOR-ASSY;,8P,700MM,YBNH025-08	
2	CN703	AA39-20069A	LEAD CONNECTOR-ASSY;,5P,500,YBNH025-05,6	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-00246A	ASSY SUB PART;S51A,CONTROL WIDE	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2	R701	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
2	R702	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
2	C701	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C702	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C703	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C704	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C705	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
2	C706	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
2	L701	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L702	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L703	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L704	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L707	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L708	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	PCB	AA41-00345A	PCB-SIDE A/V;CS29K1,FR-1,1L,A,1.6T,245x2	

ASSYPCB-PFC

1		HA94-05786B	ASSYPCB-PFC;28W8/Z4-29A8/K8,50HZ,5786A	
2	EYP07	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP08	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP09	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP10	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP11	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP12	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP13	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP14	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP15	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP16	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP17	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP18	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP01	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP02	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP03	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP04	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP05	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP06	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	PCB	AA41-00404A	PCB-PFC;CS2539,FR-1,1L,A,1.6T,330x245,KS	
2	JP801	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JP802	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	CNP02	AA39-00236A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YHL500-	
2	PFT01	AA27-00116A	COIL CHOKE;CODE_NO,-,35mH,-0, +5%,-,2.8O	
2		HA98-600020	ASSY-SUB,PART;KS4A,PFC PCB	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2		HA61-00987A	HOLDER-PFC;32W8,29A8,28W8,HIPS,ALLFLAT	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2	CNP02	3711-004721	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2		6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	CNP01	AA39-00235A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YHL500-	
2	CNP01	3711-004720	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
⚠ 2	LX803S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,+-	
⚠ 2	CX803S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	

ASSY COVER FRONT

1		AA90-04478A	ASSY COVER FRONT;28V6	
2	CB+SCR	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CF+PCB	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
2	CRT+CF	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	rating	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
2		AA96-01298A	ASSY COVER P-FRONT;28V6,HIPS HB,SILVER	
3	CF+KC	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	CF+SPK	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	CF+WR	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3		AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-	
3		AA64-03142A	KNOB-CONTROL;28V6 SEH,ABS,HB,G3676,SVM30	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		AA64-03144A	WINDOW-RMC,LED;28V6 SEH,PC,CLR	
4		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
3		AA64-70117B	BADGE-BRAND;-,AL,-,-,L65,R2000,SILVER,SS	
3		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
3		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
3		AA64-03140A	CABINET-FRONT;28V6 SEH,HIPS,HB,G4309,SV0	
4		HA83-00012A	LP-RESIN;,M BATCH,WILSON 6053-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		AA64-03143A	KNOB-POWER;28V6 SEH,ABS,HB,G3676,SVM3012	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA61-00711C	HOLDER-PCB;29K8,HIPS,HB,GRY	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	
3		AA39-00102A	LEAD CONNECTOR-ASSY;,4P,900,700MM,35155-	
3		3001-001005	SPEAKER;10W,8OHM,91DB,140HZ	
3		AA64-01506C	INLAY-AV;29K3,PVC-SHEET,T0.3,-,-,P/GRAY	
3		AA64-03145A	DECORATION-POWER;28V6 SEH,ABS,HB,G3676,S	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	CF+CB	6003-001025	SCREW-TAPTITE;RH,+,B,M4,L20,ZPC(BLK),SWR	

ASSY COVER REAR

1		AA90-04480A	ASSY COVER REAR;28V6,SEH	
2		HA64-02530C	CABINET-BACK;28M6,VL-1823,GRY	
3		AA81-00096A	RESIN-A;VL-1823,G5433,A	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	

ASSY ACCESSORY

1		AA94-05820A	ASSY ACCESSORY;50HZ,KS3A,XEC	
2		4301-000120	BATTERY-MN;1.5V,-,AA,14.5x50mm,-	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO	
2		HA68-00335A	LABEL CAUTION;A/P100(G),S51A,HUN,POL,-,-	
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I	

REMOCON

1		AA59-00104K	REMOCON;-,TM59,DREAM,29,L/GRAY,PAL-TTX	

ASSY POWER CORD

1		AA96-01126B	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C40	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	
2		AA69-00744E	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1300,H1	

7-4 WS28V65VS8XXEC

Level	Loc. No.	Code No.	Description ; Specification	Remark
			ASSY PCB MAIN(OPT)	
1		AA94-11586A	ASSY PCB MAIN(OPT);WS28V5DH,KS3A/H,TH,IN	
2	C815	2401-003602	C-AL;220uF,20%,160V,GP,BK,22x25mm,1	
2	CN501	3711-002641	CONNECTOR-HEADER;BOX,10P,1R,2.54mm,STRAI	
⚠ 2	CX801S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
2	IC301	HA96-50406B	ASSY-H/S;ASSY-H/S;-,AA62-30180B,LA7845	
3		1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
3		AA62-30180B	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,70MM,-,	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC401	1202-000103	IC-VOLTAGE COMP.;393,DIP,8P,300MIL,DUAL,	
⚠ 2	IC801S	HA96-50371C	ASSY H/S;-,-,AA62-30181H,KA3A1265R,-	
3		AA13-00101A	IC HYBRID;KA3S1265RD,CN5039,5PIN,-50TO12	
3		AA61-10386A	BRACKET-IC;-,SECC 100,T1.0,-,-,-,KA2S068	
3		AA62-30197D	HEAT SINK-ES;DP,-,-,-,AA62-30181H,-,-,-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	JA701	3722-000195	JACK-SCART;42P,-,SN,BLK,NO	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	PC801S	0604-001038	PHOTO-COUPLER;TR,130-260%,200mW,DIP-4,ST	
⚠ 2	PT801S	1404-000002	THERMISTOR-PTC;9ohm,20%,-,-,TR,RECT,-	
⚠ 2	RL801S	3501-001040	RELAY-POWER;12VDC,500mW,10A,1FormA,15mS,	
2	HC801	HA96-00274B	ASSY-H/S;-,COMPLEX,AA62-00066B,FMLG12S	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	
⚠ 3	D802	0402-001230	DIODE-RECTIFIER;FMG-G2CS,1000V,3A,TO-220	
⚠ 3	D805	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	D806	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	D807	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	IC805	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	HC401	HA96-00275D	ASSY-H/S;-,COMPLEX,AA62-00051B,2SC5446	
3		AA62-00067B	HEAT SINK-PS;-,DP,-,-,-,-,AA62-00051B,-	
⚠ 3	D414	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
3	Q401	0502-001175	TR-POWER;2SC5446,NPN,200000mW,TO-3PL,BK	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	
3		AA62-00092A	HEAT SINK;STB,A6063 EXTR.,T1.3,28*28,H12	
3	Q401	AA02-00007A	SUB ETC-MICA;,MICA,22X30X0.1MM	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	D801S	0402-001399	DIODE-BRIDGE;GSIB660,600V,6A,SIP-4,BK	
2	IC602	HA96-50369B	ASSY-H/S;-,-,AA62-30181F,TDA7297,-	
3		1201-001064	IC-POWER AMP;7297,ZIP,15P,-,DUAL,32dB,PL	
3		AA62-30181F	HEAT SINK-ES;-,AL6063 EXTR.,2,WHT,50MM,-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	IC902	1103-001171	IC-EEPROM;L51DC,16KBit,DIP,8P,300Mil,10m	
2	C105	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C103	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C101	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C416	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C909	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C228	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C230	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C809	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C810	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C811	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C202	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C205	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C920	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C231	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C215	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C630	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C631	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C645	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C652	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C603	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C207	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C708	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C239	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C214	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C605	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C620	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C635	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C646	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C829	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C837	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C839	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C916	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C914	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C831	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C825	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C240	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C636	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C905	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C607	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C608	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C211	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C212	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C213	2301-000247	C-FILM,PEF;33nF,5%,50V,TP,8.1x4.5x13mm,5	
2	C218	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C219	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C220	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C901	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C921	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C922	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C919	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C924	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C907	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C308	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C237	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C604	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C201	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C841	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C304	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C305	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
2	C821	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C902	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C302	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C401	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C403	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C421	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C402	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
2	C404	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
2	C408	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	
2	C414	2401-002597	C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
2	C418	2401-002597	C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
2	C422	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
2	C424	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
2	C601	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
2	C610	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C611	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C612	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C613	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C209	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C617	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C917	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C413	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C623	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C624	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C627	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C629	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C642	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C644	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C638	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C639	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C249	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C632	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
2	C634	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C832	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C838	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C826	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C637	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C640	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C641	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C643	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C647	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
2	C649	2301-000108	C-FILM,PEF;1.5nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C804	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
2	C805	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
2	C807	2301-001397	C-FILM,PPF;2.2nF,5%,1.2kV,TP,15x8.5x13.5	
2	C814	2201-000406	C-CERAMIC,DISC;0.27NF,10%,2KV,Y5P,TP,6.3	
2	C817	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C819	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C822	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C818	2401-000722	C-AL;2200uF,20%,25V,WT,TP,16x25,7.5	
2	C910	2201-000980	C-CERAMIC,DISC;0.03NF,5%,50V,C0G,TP,5X3M	
2	C911	2201-000980	C-CERAMIC,DISC;0.03NF,5%,50V,C0G,TP,5X3M	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D202	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D207	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D208	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D209	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D210	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D211	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D602	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D804	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DZ402	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D906	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D405	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D401	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
⚠ 2	D402	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
⚠ 2	D404	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
⚠ 2	D411	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
⚠ 2	D406	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D808	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D810	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D811	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D907	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D403	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D801	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
2	DZ201	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ202	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ802	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ902	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ601	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ603	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ806	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ906	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ907	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ908	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ909	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ910	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ604	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ605	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ203	0403-001321	DIODE-ZENER;MTZJ6.8C,6.66-7.01V,500mW,DO	
2	DZ302	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ303	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ304	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ305	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ306	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ804	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ401	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
2	DZ801	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ808	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ204	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ205	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT102	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT301	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT302	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT401	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT402	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT801	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT409	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT103	AA60-40014A	PIN-GT,ASSY;AUTO	
2	J102	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J103	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J105	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J111	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J112	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J114	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J115	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J116	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J117	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J119	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J122	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J123	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J124	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J203	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J205	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J206	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J207	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J208	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J209	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J210	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J211	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J212	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J213	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J214	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J215	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J216	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J217	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J218	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J219	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J222	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J223	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J224	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J225	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J227	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J228	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J229	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J230	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J232	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J234	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J236	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J237	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J238	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J239	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J241	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L204	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J244	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J246	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J247	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J248	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J401	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J402	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J404	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J409	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J416	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J421	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J422	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J424	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J428	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J601	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J602	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J603	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J604	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J606	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J607	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J611	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J614	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J615	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J616	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J617	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J618	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J619	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J620	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J621	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J622	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J624	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J627	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J629	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J631	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J632	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J703	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J704	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J708	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J715	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J716	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J717	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J801	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J802	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J803	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J804	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J805	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J806	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J807	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J810	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J811	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J816	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J819	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J820	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J821	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J824	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J826	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J829	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J830	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J831	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J832	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J833	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J909	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J911	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J912	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J913	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J915	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J916	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J924	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J925	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J926	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J927	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J928	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J931	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J932	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J933	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J934	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J936	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J941	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J942	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R939	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J714	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J249	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	D908	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J835	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J425	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J633	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J818	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J612	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L610	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J937	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J918	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J907	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J626	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J121	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J118	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J101	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J253	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J943	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J944	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J705	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J707	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J407	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J605	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J608	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J609	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J419	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J420	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J126	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J108	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J127	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L107	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R223	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R234	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	C221	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	C222	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	C223	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J254	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J914	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J411	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J412	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J630	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L410	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L804	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J940	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J204	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J701	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J817	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L413	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R926	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J902	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J226	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J430	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	EY301	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY302	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY303	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY304	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY413	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY418	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY424	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY425	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY426	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY427	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY428	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY429	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY430	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY431	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY432	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY433	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY434	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY435	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY436	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY437	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	EY438	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY439	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY440	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY441	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY442	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY443	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY444	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY445	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY446	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY447	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY448	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY449	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY450	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY451	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY452	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY453	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY454	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY455	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY456	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY457	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY458	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY601	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY602	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY603	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY604	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY701	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY702	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY703	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY704	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY804	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY805	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY806	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY811	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY812	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY814	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY815	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY816	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY817	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY820	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY826	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY831	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY832	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY834	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY835	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY836	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY837	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY838	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY839	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY840	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY841	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY842	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY844	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY845	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY846	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY847	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY848	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY849	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY854	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY855	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY856	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY857	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY858	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY859	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	TOP1	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	TOP2	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL401	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL402	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL405	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL406	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL803	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL805	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL806	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL807	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL808	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL809	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL810	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL811	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	R236	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R237	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R238	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R247	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R235	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R622	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R621	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R935	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R202	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R243	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R245	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R246	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R310	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R716	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R606	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R620	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R629	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R309	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R609	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R211	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R952	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R940	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R941	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R942	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R947	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R948	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R102	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R103	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R604	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R605	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R610	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R611	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R612	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R613	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R628	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R627	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R907	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J904	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R925	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J920	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R955	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 2	RY801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY802S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	VP801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	X901	2801-003728	CRYSTAL-UNIT;6MHz,30ppm,28-AAM,20pF,40oh	
2	L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C707	2401-000939	C-AL;22uF,20%,25V,GP,TP,5x11,5	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L406	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L907	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L711	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L108	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L109	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	R706	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	R707	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	R708	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L302	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L809	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J901	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L303	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L207	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J406	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L412	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L407	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L601	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L609	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	R233	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	C233	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	C234	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	C235	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L201	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L604	2701-000169	INDUCTOR-AXIAL;3.9uH,10%,2.5x3.4mm	
2	Q201	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q203	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q906	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q908	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q204	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q907	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	R244	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R954	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R823	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R216	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R603	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R817	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R924	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R936	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R252	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R726	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R254	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R601	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R602	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R902	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R816	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R228	2001-000117	R-CARBON(S);68OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R303	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R404	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP,2.4X6.4MM	
⚠ 2	L401	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R828	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R314	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R411	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R412	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R422	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R421	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R913	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R426	2003-000540	R-METAL OXIDE(S);1Kohm,5%,2W,AF,TP,4x12m	
2	R614	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R615	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R616	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R617	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R226	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R812	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R831	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R931	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R956	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R214	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R802	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R803	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R804	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R805	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R806	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R813	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R832	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R810	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R418	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R819	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R301	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R820	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R822	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R824	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R825	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R901	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R905	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R906	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R921	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R927	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R928	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R937	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R833	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R724	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R725	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R253	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R248	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R249	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R250	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R911	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R922	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R923	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	C833	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C229	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
2	CN901	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
2	CN903	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
2	CW901	2503-000156	C-NETWORK;100pFx4,20%,50V	
2	D203	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D204	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D205	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D206	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D901	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D902	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D903	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D904	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	DZ803	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
⚠ 2	FA802S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
2	HIC201	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC202	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC203	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC204	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	R409	2003-001018	R-METAL OXIDE(S);220ohm,5%,2W,AF,TP,3.9x	
2	R410	2003-001018	R-METAL OXIDE(S);220ohm,5%,2W,AF,TP,3.9x	
2	R413	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R424	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R827	2008-000284	R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
2	R829	2008-001029	R-FUSIBLE(S);5.6ohm,5%,2W,AF,TP,3.9x10mm	
2	R433	2003-001042	R-METAL OXIDE(S);5.6Kohm,5%,2W,AF,TP,3.9	
2	R717	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R105	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	X601	2801-003903	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,12pF	
2	IC904	1203-001943	IC-VOL. DETECTOR;7025,TO-92,3P,-,PLASTIC	
2	PCB	AA41-00168H	PCB-MAIN;CS29A6,FR-1,1L,H,1.6T,330X245,K	
2	Q802	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	Q909	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
2	Q910	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
2	R434	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
2	R403	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
2	C113	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C925	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	L605	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L606	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L607	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L608	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L701	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L705	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L706	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	R106	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R313	2004-001137	R-METAL;6.8Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R710	2001-000938	R-CARBON;680HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000938	R-CARBON;680HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R241	2001-000938	R-CARBON;680HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R811	2004-001408	R-METAL(S);91Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	R809	2001-000022	R-CARBON(S);330HM,5%,1/2W,AA,TP,2.4X6.4M	
2	L901	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L903	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L904	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L909	2701-000191	INDUCTOR-AXIAL;47uH,10%,2.5x3.4mm	
2	L908	2701-000191	INDUCTOR-AXIAL;47uH,10%,2.5x3.4mm	
2	R818	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
2	CN702	3711-002647	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	
2	C656	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
2	C657	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
2	C306	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C415	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C621	2401-002458	C-AL;1000uF,20%,35V,GP,TP,16x25,7.5	
2	C824	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C823	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C115	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C116	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C701	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	L209	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L210	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L801	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
2	L806	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
2	R945	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R946	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R821	2004-004999	R-METAL(S);143Kohm,1%,1/2W,AA,TP,2.4X6.5	
2	R210	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C835	2401-002289	C-AL;470uF,20%,35V,WT,TP,10x20,5	
2	C840	2401-002212	C-AL;10uF,20%,25V,WT,TP,5x11,5	
2	C827	2401-002212	C-AL;10uF,20%,25V,WT,TP,5x11,5	
2	R417	2004-001397	R-METAL(S);4.7Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	CN502	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
2	R808	2001-001079	R-CARBON(S);150HM,5%,1/2W,AA,TP,2.4X6.4M	
2	R304	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
2	R307	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
2	R425	2008-001011	R-FUSIBLE(S);0.18ohm,10%,2W,AF,TP,3.9x10	
2		HA68-02176A	LABEL;LABEL	
2	R423	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
2	C654	2201-000611	C-CERAMIC,DISC;0.056NF,5%,50V,C0G,TP,7X3	
2	C425	2301-001259	C-FILM,MPPF;100nF,5%,400V,TP,19x8x16,7.5	
2	C622	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C625	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C626	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C628	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C104	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
2	C808	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D803	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D816	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DZ602	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	R207	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R208	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R414	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	HIC401	AA13-00094A	IC HYBRID;-,DDRI001A,SIP,5P,-,TP	
2	C102	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
2	C913	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C915	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C918	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C210	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	R420	2004-004015	R-METAL(S);9.1Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	C106	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
2	C303	2201-002103	C-CERAMIC,DISC;0.015NF,5%,500V,C0G,TP,6.	
2	C409	2303-001001	C-FILM,PPF;22nF,5%,630V,TP,18x14.5x8.5mm	
2	C411	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C412	2301-000148	C-FILM,PEF;10nF,5%,100V,TP,7x3.2x7mm,5mm	
2	L905	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R302	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP,2.5x6.5m	
2	R305	2003-002205	R-METAL OXIDE(S);330ohm,5%,2W,AG,TP,3.9X	
2	R306	2003-002205	R-METAL OXIDE(S);330ohm,5%,2W,AG,TP,3.9X	
2	R401	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
2	R402	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
2	R415	2001-001055	R-CARBON(S);1.8KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R607	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R608	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R212	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
⚠ 2	FA803S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
2	R407	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
2	C828	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
2	R405	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	
2	R704	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R242	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J919	2701-000183	INDUCTOR-AXIAL;39uH,5%,2.5x3.4mm	
⚠ 2	D408	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
2	R826	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
2	KEZI	2303-000296	C-FILM,PPF;18nF,0.05,630V,BK,20x16x9.5mm	
2	C410	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	C427	2401-002267	C-AL;2.2uF,20%,250V,GP,TP,8x11.5,5	
2	D413	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
2	R436	2003-002008	R-METAL OXIDE(S);18Kohm,5%,2W,AF,TP,3.9x	
2	C203	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	R944	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	L910	2701-000215	INDUCTOR-AXIAL;8.2uH,10%,2.5x3.4mm	
2	C926	2202-000154	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
2	L222	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	R835	2003-002181	R-METAL OXIDE(S);68Kohm,5%,2W,AG,TP,3.9x	
2	R836	2003-002181	R-METAL OXIDE(S);68Kohm,5%,2W,AG,TP,3.9x	
2	L208	2701-000147	INDUCTOR-AXIAL;2.2uH,5%,2.4x3.4mm	
2	C246	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	C248	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	C247	2202-000849	C-CERAMIC,MLC-AXIAL;0.018NF,5%,50V,C0G,T	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
⚠ 2	FP801S	3601-000297	FUSE-CARTRIDGE;250V,5A,TIME-LAG,GLASS,5.	
⚠ 2	RX801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
2	R315	2004-002022	R-METAL(S);51Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	IC901	AA09-00221A	IC MICOM;SIM806HEW2-A042,SIM806HEW2-A042	
2	IC601	1204-001661	IC-SOUND PROCESSOR;MSP3411G-A2,DIP,52P,-	
⚠ 2	T401	AA26-50001S	TRANS-HORIZ.DRIVE;-,-,-,6.0mH,-,-,44uH,-	
⚠ 2	TU01S	AA40-00079A	TUNER;TCPW3001PD16A(S),PAL,181CH,38.	
2		AA98-00245A	ASSY SUB PART;S51A,PCB MAIN(OPT)	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
⚠ 2	T801S	AA26-00046B	TRANS SWITCHING;CODE-NO,CW6844N8X/XEF,-,	
⚠ 2	IC804	HA96-00243C	ASSY-H/S;-,REGULATOR,AA62-00045A,KA7806	
3		1203-000284	IC-POSI.FIXED REG.;7806,TO-220,3P,-,PLAS	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	L408	AA27-40003P	COIL HORIZ. WIDTH;-,120uH/180uH,Th8x20,U	
⚠ 2	LX801S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,+-	
2	L405	AA27-00057A	COIL HORIZ. WIDTH;-,10mH,YL-9N 15x27.5 C	

Level	Loc. No.	Code No.	Description ; Specification	Remark
⚠ 2	IC803	1203-001697	IC-VOLTAGE REGULATOR;78R08,TO-220,4P,-,P	
2	Q404	HA96-00437A	ASSY-H/S;ASSY-H/S;AA62-00076A,IRF620	
3		0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		HA62-00076A	HEAT SINK;AL,100Hz,T1.0,10,40	
2	Q402	0505-001116	FET-SILICON;BUZ73A,N,200V,22A,0.6ohm,40W	
⚠ 2	CY802S	2201-002002	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,TP,16X	
2	C407	2301-001338	C-FILM,MPE-PPF;0.68nF,5%,1.6kV,TP,28x7x1	
2	C405	2303-001015	C-FILM,PPF;5.5nF,5%,1.6kV,TP,29x9.5x17,2	
2	C406	2303-001015	C-FILM,PPF;5.5nF,5%,1.6kV,TP,29x9.5x17,2	
2	C426	2306-000204	C-FILM,MPPF;430nF,5%,400V,TP,26x20.5x12.	
2	IC903	1203-001944	IC-POSI.FIXED REG.;78RM33,TO-220,3P,-,PL	
2	IC202	1203-001944	IC-POSI.FIXED REG.;78RM33,TO-220,3P,-,PL	
2	C806	2401-003031	C-AL;470uF,20%,450V,GP,BK,35x45mm,1	
2	C820	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM	
2	R807	2006-001083	R-CEMENT;120ohm,5%,5W,CJ,TP,14x10x27mm	
2	C423	2301-001192	C-FILM,MPPF;820nF,5%,400V,TP,29x18.5x25.	
2	TOP	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
2	L808	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
2	L402	AA27-10004F	COIL CHOKE;-,56uH,K,-,2.5A,BK,-,DR12x15,	
⚠ 2	T444S	AA26-00132A	TRANS FBT;1372.0074A,CT29A6,1.8MH,135V	
⚠ 2	L403	AA27-00015A	COIL LINEARITY;-,7.3UH,L81 DR15X18,-,-,B	
⚠ 2	IC201S	HA98-00134B	ASSY-SIPADOSS MODULE;DP,KS3A,100HZ,SDA94	
3		AA95-00989A	ASSY ETC-CHROMA BODY;DP,-,KS3A,-,-,100HZ	
4	P1	3711-004782	CONNECTOR-HEADER;NOWALL,32P,1R,1.778MM,S	
4	P2	3711-004782	CONNECTOR-HEADER;NOWALL,32P,1R,1.778MM,S	
4	PCB	AA41-00411A	PCB-SIPADOS BODY;CS29A5,FR-4,2L,A,1.6T,1	
3	IC3	1204-001909	IC-VIDEO PROCESS;DDP3310B-F6,PLCC,68P,-,	
3	IC1	1204-001789	IC-VIDEO PROCESS;VPC3230D-B3,QFP,80P,787	
3	IC2	1204-001858	IC-PICTURE PROCESS;SDA9401,QFP,64P,-,PLA	
3	JP1	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
3	R17	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
3	R19	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
3	R7	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
3	L1	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
3	R10	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
3	R1	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
3	R2	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
3	R3	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
3	R4	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
3	R5	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
3	R13	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
3	R14	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
3	R15	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
3	R6	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
3	R9	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
3	CD3	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
3	CD4	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
3	C21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C39	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C51	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C57	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C27	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
3	C33	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
3	C37	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
3	C16	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
3	C1	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C13	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C17	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C18	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C2	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C24	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C25	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C26	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C5	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C7	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C8	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C9	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C20	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
3	C6	2203-000659	C-CERAMIC,CHIP;0.27nF,5%,50V,NP0,TP,1608	
3	C23	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
3	C3	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
3	C11	2203-001052	C-CERAMIC,CHIP;0.56nF,10%,50V,X7R,TP,160	
3	C14	2203-001052	C-CERAMIC,CHIP;0.56nF,10%,50V,X7R,TP,160	
3	C19	2203-001052	C-CERAMIC,CHIP;0.56nF,10%,50V,X7R,TP,160	
3	C4	2203-001052	C-CERAMIC,CHIP;0.56nF,10%,50V,X7R,TP,160	
3	C22	2203-001256	C-CERAMIC,CHIP;0.008nF,0.25pF,50V,NP0,TP	
3	C38	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
3	C28	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
3	C32	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
3	C34	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
3	C36	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
3	CE1	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	CE2	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	CE4	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	CE5	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	CE3	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
3	L2	2702-001092	INDUCTOR-RADIAL;2.2uH,10%,6x4mm	
3	X2	2801-003432	CRYSTAL-UNIT;20.25MHZ,30PPM,28-AAM,13PF,	
3	L3	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
3	L4	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
3	CN64	3711-004778	CONNECTOR-HEADER;NOWALL,64P,2R,2MM,ANGLE	
3	PCB	AA41-00475A	PCB-SIPADOS TOP;CS29A5,FR-4,4L,A,1.6T,18	
2	CN801	3711-004721	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2	CN802	3711-004720	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2	CN701A	AA39-00306A	LEAD CONNECTOR-ASSY;KS3A,UL2547#26,UL/CS	
2	BOT	AA39-20536G	LEAD CONNECTOR ASSY;,1P,F,F,60MM,1617#22	

ASSY CRT

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		HA94-50010A	ASSY CRT;W66EJU011X121,100Hz,28,WIDE A	
⚠ 2		AA03-00241A	CRT COLOR;W66EJU011X121,+380MG,0.290MH,0	
2		AA39-20518A	LEAD CONNECTOR-ASSY;,6(4)P,350MM,YFH806-	
2		AA27-00020A	COIL-DEGAUSSING;-,28,12OHM,55T,L3000,E	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-70008D	ASSY TBC WIRE(P);-,28WIDE,PAL,2P,-	

ASSY PCB MISC-CONTROL

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-12332A	ASSY PCB MISC-CONTROL;28V6,KS3A,PAL	
2		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
2		0204-000442	SOLVENT;1M-1000,C3H7OH,96,-	
2		0204-001024	FLUX;DF-98TVS,-,20%,-	
2	LDY01	0601-000198	LED;ROUND,RED/GRN,5.0mm,630/565nm	
⚠ 2	PD811S	3711-004696	CONNECTOR-HEADER;NOWALL,3P,1R,5MM,ANGLE,	
⚠ 2	PD812S	3711-004697	CONNECTOR-HEADER;NOWALL,3P,1R,5MM,ANGLE,	
2	Bracke	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	
2	Bracke	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
2	CNY02	AA39-20005B	LEAD CONNECTOR-ASSY;,3P,300MM,YBNH025-03	
2	CNY01	AA39-20069A	LEAD CONNECTOR-ASSY;,5P,500,YBNH025-05,6	
2	CN811	AA39-20179A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YFH800-	
2		AA61-00530B	BRACKET-MASTER;25M6,29M6,SECC	
2		AA97-13500A	ASSY AUTO-CONTROL;32V6,KS3A,PAL(SEH)	
3	DY02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	DY01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	DZY01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
3	DZY02	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
3	RY03	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RY05	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RY01	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
3	RY02	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RY04	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	LY01	2701-000136	INDUCTOR-AXIAL;18uH,10%,2.5x3.4mm	
3	PCB	AA41-00799A	PCB-CONTROL;28V6/32V6,CEM-1,1L,A,1.6T,24	
3	EL01	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	EL02	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	EL03	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	EL04	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	SWY02	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY03	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY04	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY05	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY06	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	CY01	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	

ASSY PCB CRT

1		AA95-01539A	ASSY PCB CRT;,KS3A,28,W6-W7,100HZ	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2	CN501A	3711-002641	CONNECTOR-HEADER;BOX,10P,1R,2.54mm,STRAI	
2	CN501A	AA39-00225A	LEAD CONNECTOR-ASSY;,10P,600MM,67096-010	
2	CN502A	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
2	CN502E	AA39-20029K	LEAD CONNECTOR-ASSY;,7P,400,67096-007,S,	
2	CNF01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
2	IC501	HA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
2	IC502	HA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
2	IC503	HA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
3		1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
3		6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	
3		6021-000154	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C	
3		AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-,-	
2	VA999	3704-000114	SOCKET-CRT;14P,29.1,35.5,SN,ISH09S/BK	
2		HA68-02176A	LABEL;LABEL	
2	C502	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C505	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C508	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	CF07	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C503	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C506	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C509	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C511	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	C512	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C515	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C526	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C514	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C518	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C519	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C520	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C521	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C522	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C523	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	CF01	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
2	CF02	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C516	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	CF03	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
2	CF04	2201-000653	C-CERAMIC,DISC;0.068NF,5%,50V,SL,TP,5X3M	
2	CF05	2301-000261	C-FILM,PEF;4.7nF,5%,100V,TP,10.5x12.5x6.	
2	CF06	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
2	CF08	2201-000604	C-CERAMIC,DISC;0.056NF,+100-0%,500V,SL,T	
2	CF10	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	CF12	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	CF14	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
2	D502	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D507	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D508	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D509	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D510	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D511	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D512	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF02	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF03	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DF04	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DZ503	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
2	DZF01	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
2	DZF02	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
2	EL82	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL83	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL84	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL85	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL86	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL87	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL88	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL89	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL90	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL91	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL92	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL94	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT504	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT505	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT507	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT508	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT506	AA60-40014A	PIN-GT,ASSY;AUTO	
2	J501	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J503	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J505	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J506	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J507	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J508	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J509	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J510	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J511	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J512	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J513	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J514	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J515	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J516	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J520	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J524	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J526	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J527	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J528	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF06	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF07	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J529	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J530	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J521	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J523	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J531	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	LF02	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
2	LF01	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L505	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L506	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	LF03	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	PCB	AA41-00210D	PCB-CRT;CS29A6,FR-1,1L,D,1.6T,330x245,KS	
2	Q502	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q503	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	QF01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	QF02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	QF03	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	RF10	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF11	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R505	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R510	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R517	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF18	2003-000458	R-METAL OXIDE(S);100ohm,5%,2W,AF,TP,4x12	
2	R519	2002-001009	R-COMPOSITION;2.7Kohm,10%,1/2W,AA,TP,3.7	
2	R501	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF02	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF03	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R522	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF05	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF06	2001-000989	R-CARBON;820KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF07	2004-001989	R-METAL;620ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	RF08	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF09	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF12	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF13	2001-001179	R-CARBON(S);68KOHM,5%,1/2W,AA,TP,2.4X6.4	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	RF16	2001-001179	R-CARBON(S);68KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF14	2001-001071	R-CARBON(S);12KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF15	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF17	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF19	2003-001023	R-METAL OXIDE(S);120ohm,5%,2W,AF,TP,3.9x	
2	RF20	2003-002214	R-METAL OXIDE(S);680ohm,5%,2W,AG,TP,3.9x	
2	RF21	2003-002214	R-METAL OXIDE(S);680ohm,5%,2W,AG,TP,3.9x	
2	RF22	2003-002214	R-METAL OXIDE(S);680ohm,5%,2W,AG,TP,3.9x	
2	RF23	2003-000746	R-METAL OXIDE(S);56ohm,5%,2W,AF,TP,4x12m	
2	RF24	2003-000746	R-METAL OXIDE(S);56ohm,5%,2W,AF,TP,4x12m	
2	RF25	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	L503	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L504	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	LF04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	LF05	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	R502	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R507	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R512	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R503	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R508	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R513	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R526	2004-000500	R-METAL;2.7Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R527	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
2	R518	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R542	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R543	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R544	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R546	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	L501	2701-000178	INDUCTOR-AXIAL;33uH,10%,3x7mm	
2	R521	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R504	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R509	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R539	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	L507	2701-000215	INDUCTOR-AXIAL;8.2uH,10%,2.5x3.4mm	
2	SG501	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG503	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG504	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG505	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2		HA98-00054A	ASSY SUB PART;ASSY SUB PART,KS3A,PCB,CRT	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
2	QF04	HA96-50149A	ASSY-H/S;-,AA62-30013A,2SC2344,-	
3		0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
3	SCR09	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S09	AA62-30013A	HEAT SINK-ES;-,A6063 EXTR,-,-,45(21) T02	
2	QF05	HA96-50149B	ASSY-H/S;-,TR,AA62-30013A,2SA1011,-	
3	QV10	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
3	SCR10	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S10	AA62-30013A	HEAT SINK-ES;-,A6063 EXTR,-,-,45(21) T02	
2	C510	2401-001525	C-AL;47uF,20%,250V,GP,BK,16x25mm,7.	
2	R523	2008-000267	R-FUSIBLE(S);2.4ohm,5%,2W,AA,TP,3.9x10mm	
2	CF11	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	JA501	3722-001503	JACK-PIN;1P,1PI,NI,RED,SCR-JACK	
2	CNF01	AA39-20033C	LEAD CONNECTOR-ASSY;,3(2)P,200,67096-003	
2	C513	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	

ASSY ETC-PCB A/V BOARD

1		AA95-01518A	ASSY ETC-PCB A/V BOARD;,29K8,KS3A,50HZ	
2	JH701	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
2	JA701	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
2	CN704	AA39-00070A	LEAD CONNECTOR-ASSY;,4P,200MM,YBNH250-04	
2	CN705	AA39-20009E	LEAD CONNECTOR-ASSY;,1P,600,YFH800-01,16	
2	CN701	AA39-20068G	LEAD CONNECTOR-ASSY;,8P,700MM,YBNH025-08	
2	CN703	AA39-20069A	LEAD CONNECTOR-ASSY;,5P,500,YBNH025-05,6	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-00246A	ASSY SUB PART;S51A,CONTROL WIDE	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R701	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R702	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
2	C701	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C702	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C703	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C704	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C705	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
2	C706	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
2	L701	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L702	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L703	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L704	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L707	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L708	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	PCB	AA41-00345A	PCB-SIDE A/V;CS29K1,FR-1,1L,A,1.6T,245x2	

ASSYPCB-PFC

1		HA94-05783B	ASSYPCB-PFC;32W8/Z4,50HZ,5783A	
2	EYP07	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP08	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP09	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP10	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP11	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP12	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP13	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP14	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP15	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP16	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP17	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP18	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP19	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP20	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP21	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP22	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP23	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP24	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP25	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP26	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP01	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP02	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP03	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP04	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP05	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP06	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	PCB	AA41-00404A	PCB-PFC;CS2539,FR-1,1L,A,1.6T,330x245,KS	
2	CNP02	AA39-00236A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YHL500-	
2	CNP01	AA39-00235A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YHL500-	
2	PFT01	AA27-00121A	COIL CHOKE;CODE_NO,SP43J5HP,15mH,-0%,+5%	
2	PFT02	AA27-00121A	COIL CHOKE;CODE_NO,SP43J5HP,15mH,-0%,+5%	
2		HA98-600020	ASSY-SUB,PART;KS4A,PFC PCB	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2		HA61-00987A	HOLDER-PFC;32W8,29A8,28W8,HIPS,ALLFLAT	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2	CNP02	3711-004721	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2	CNP01	3711-004720	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2		6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
⚠ 2	LX803S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,+-	
⚠ 2	CX803S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	

ASSY COVER FRONT

1		AA90-04478B	ASSY COVER FRONT;28V6H,VDS	
2	CB+SCR	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CF+PCB	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
2	CRT+CF	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	rating	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
2		AA96-01298B	ASSY COVER P-FRONT;28V6H,VDS,HIPS HB,SIL	
3	CF+KC	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	CF+SPK	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	CF+WR	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3		AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	
3		AA64-03142A	KNOB-CONTROL;28V6 SEH,ABS,HB,G3676,SVM30	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		AA64-03144A	WINDOW-RMC,LED;28V6 SEH,PC,CLR	
4		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
3		AA64-70117B	BADGE-BRAND;-,AL,-,-,L65,R2000,SILVER,SS	
3		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
3		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
3		AA64-03140B	CABINET-FRONT;28V6(SEH),HIPS,HB,G4309,SV	
4		HA83-00012A	LP-RESIN;,M BATCH,WILSON 6053-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		AA64-03143A	KNOB-POWER;28V6 SEH,ABS,HB,G3676,SVM3012	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA61-00711C	HOLDER-PCB;29K8,HIPS,HB,GRY	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	
3		AA39-00102A	LEAD CONNECTOR-ASSY;,4P,900,700MM,35155-	
3		3001-001005	SPEAKER;10W,8OHM,91DB,140HZ	
3		AA64-01506C	INLAY-AV;29K3,PVC-SHEET,T0.3,-,-,P/GRAY	
3		AA64-03145A	DECORATION-POWER;28V6 SEH,ABS,HB,G3676,S	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	CF+CB	6003-001025	SCREW-TAPTITE;RH,+,B,M4,L20,ZPC(BLK),SWR	

ASSY COVER REAR

1		AA90-04480A	ASSY COVER REAR;28V6,SEH
2		HA64-02530C	CABINET-BACK;28M6,VL-1823,GRY
3		AA81-00096A	RESIN-A;VL-1823,G5433,A
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-

ASSY P/MATERIAL

1		AA92-07506A	ASSY P/MATERIAL;28V6
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X
2		AA69-01894A	CUSHION SET;28V6(SEH),PS FOAMED,C=0.02
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT
2		AA69-00744E	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1300,H1

ASSY ACCESSORY

1		AA94-05823A	ASSY ACCESSORY;50HZ;D,FLAT,100HZ,KS3A,XE
2		4301-000121	BATTERY-MN;1.5V,-,AAA,10.5x44.5m,HOLDER
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM
2		HA68-02124A	LABEL;A/P120(G),70,69,WHITE,XECCO
2		HA68-00971A	LABEL-BACK,DOLBY;A/P100(G),SILVER-BLACK
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I

Level	Loc. No.	Code No.	Description ; Specification	Remark

REMOCON

1		AA59-00116B	REMOCON;-,TM57,37,D3/D4,L/GRAY,S/S,GRA

ASSY POWER CORD

⚠ 1		AA96-01127B	ASSY POWER CORD;DP,AA39-10001M,CP2,H/C40
2		AA39-10001M	CBF POWER CORD;-,KJP-140,KLCE-2F,2.4m,HO
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002

ASSY BOX

1		AA92-07499A	ASSY BOX;28V6
2		AA69-01950A	PACKING CASE;28V6(SEH),D-3 AB,A1,865,605
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM

7-5 WS32V64NS8XXEC

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-11584A	ASSY PCB MAIN(OPT);WS32V5N,KS3A/H,TH,INV	
⚠ 2	T801S	AA26-00046A	TRANS SWITCHING;-,-,-,AC90~260V,DC135/16	
⚠ 2	IC201S	1204-001634	IC-VIDEO PROCESS;VDP3120B-C3,DIP,64P,-,P	
2	HC401	HA96-00275A	ASSY-H/S;-,COMPLEX,AA62-00051A,KSD5703,	
3		AA62-00051A	HEAT SINK-PS;-,-,-,SILVER,HOLE 31mm,ALL,	
⚠ 3	D414	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
3	Q401	0502-001136	TR-POWER;KSD5703,NPN,70W,TO-3PF,ST,8-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	T401	AA26-50001L	TRANS-HORIZ.DRIVE;-,-,-,29mH,-,-,133uH,-	
⚠ 2	TU01S	AA40-00079A	TUNER;TCPW3001PD16A(S),PAL,181CH,38.	
2	IC602	HA96-50369B	ASSY-H/S;-,-,AA62-30181F,TDA7297,-	
3		1201-001064	IC-POWER AMP;7297,ZIP,15P,-,DUAL,32dB,PL	
3		AA62-30181F	HEAT SINK-ES;-,AL6063 EXTR.,2,WHT,50MM,-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	IC601	1204-001775	IC-SOUND PROCESSOR;MSP3410D-C5 9458 ,SDI	
⚠ 2	T444S	AA26-00196A	TRANS FBT;1352.5070A,CPTTV,3.46MH,FERRIT	
⚠ 2	PT801S	1404-001156	THERMISTOR-PTC;9OHM,+30%/-20%,220VRMS,27	
2	C806	2401-001137	C-AL;330uF,20%,400V,GP,BK,30x45mm,1	
2	L402	AA27-00067A	COIL HORIZ. WIDTH;-,240uH,YL9N 12x20 C:6	
2	C405	2306-000330	C-FILM,MPPF;7.7nF,3%,1.6KV,TP,28.5x18.5x	
2	C406	2306-000330	C-FILM,MPPF;7.7nF,3%,1.6KV,TP,28.5x18.5x	
2	C426	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
2	L411	AA27-30003G	COIL LINEARITY;-,44uH,DR14x15,PI0.2x10,1	
2	L408	AA27-00025A	COIL CHOKE;-,1MH,10%,-,-,BK,-,12X20,14X2	
2	L405	AA27-00057A	COIL HORIZ. WIDTH;-,10mH,YL-9N 15x27.5 C	
2	C423	2301-001192	C-FILM,MPPF;820nF,5%,400V,TP,29x18.5x25.	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ 2	LX801S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,+-	
2	IC301	HA96-50406B	ASSY-H/S;ASSY-H/S;-,AA62-30180B,LA7845	
3		1204-000517	IC-VERTICAL DEF;LA7845,SIP,7P,-,PLASTIC	
3		AA62-30180B	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,70MM,-,	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	HC801	HA96-00274A	ASSY-H/S;-,COMPLEX,AA62-00053A,FMLG12S	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00053A	HEAT SINK-PS;-,-,-,SILVER,HOLE 22mm,ALL,	
⚠ 3	D802	0402-001230	DIODE-RECTIFIER;FMG-G2CS,1000V,3A,TO-220	
⚠ 3	D805	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	D806	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	D807	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	IC802	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC803	1203-001697	IC-VOLTAGE REGULATOR;78R08,TO-220,4P,-,P	
⚠ 2	IC804	HA96-00243C	ASSY-H/S;-,REGULATOR,AA62-00045A,KA7806	
3		1203-000284	IC-POSI.FIXED REG.;7806,TO-220,3P,-,PLAS	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-,	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	IC902	1103-001171	IC-EEPROM;L51DC,16KBit,DIP,8P,300MIL,10m	
2	IC901	AA09-00181A	IC MICOM;SIM806EW3-A035,SIM806EW3-A035,5	
⚠ 2	IC801S	HA96-50371C	ASSY H/S;-,-,AA62-30181H,KA3A1265R,-	
3		AA13-00101A	IC HYBRID;KA3S1265RD,CN5039,5PIN,-50TO12	
3		AA61-10386A	BRACKET-IC;-,SECC 100,T1.0,-,-,-,KA2S068	
3		AA62-30197D	HEAT SINK-ES;DP,-,-,-,AA62-30181H,-,-,-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	IC903	1203-001944	IC-POSI.FIXED REG.;78RM33,TO-220,3P,-,PL	
2	C407	2301-001338	C-FILM,MPE-PPF;0.68nF,5%,1.6kV,TP,28x7x1	
⚠ 2	D801S	0402-001399	DIODE-BRIDGE;GSIB660,600V,6A,SIP-4,BK	
2	Q402	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
⚠ 2	PC801S	0604-001038	PHOTO-COUPLER;TR,130-260%,200mW,DIP-4,ST	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
2	C815	2401-003602	C-AL;220uF,20%,160V,GP,BK,22x25mm,1	
⚠ 2	CY802S	2201-002002	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,TP,16X	
2	JA701	3722-000195	JACK-SCART;42P,-,SN,BLK,NO	
2	C820	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM	
2	R807	2006-001083	R-CEMENT;120ohm,5%,5W,C,J,TP,14x10x27mm	
2	L808	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
⚠ 2	IC401	1202-000103	IC-VOLTAGE COMP.;393,DIP,8P,300MIL,DUAL,	
2	Q404	HA96-00437A	ASSY-H/S;ASSY-H/S;AA62-00076A,IRF620	
3		0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		HA62-00076A	HEAT SINK;AL,100Hz,T1.0,10,40	
2		AA98-00245A	ASSY SUB PART;S51A,PCB MAIN(OPT)	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H7OH,96,-	
2	C105	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C101	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C103	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C228	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C230	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C809	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C810	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C811	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C202	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C205	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C920	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C231	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C215	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C630	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C631	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C645	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C652	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C603	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C708	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C214	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C216	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C605	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C620	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C635	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C646	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C829	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C837	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C839	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C916	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C308	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C914	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C831	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C825	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C217	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C636	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C905	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C607	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C608	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C903	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C211	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C212	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C416	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C213	2301-000247	C-FILM,PEF;33nF,5%,50V,TP,8.1x4.5x13mm,5	
2	C218	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C219	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C220	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C221	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C222	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C223	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C901	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C921	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C922	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C919	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C924	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C232	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C233	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C234	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C235	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-.5mm	
2	C907	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-.5mm	
2	C909	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-.5mm	
2	C236	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-.5mm	
2	C237	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C841	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C201	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C303	2201-002031	C-CERAMIC,DISC;0.005NF,0.5PF,50V,C0G,TP,	
2	C224	2201-002031	C-CERAMIC,DISC;0.005NF,0.5PF,50V,C0G,TP,	
2	C225	2201-002031	C-CERAMIC,DISC;0.005NF,0.5PF,50V,C0G,TP,	
2	C304	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C305	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
2	C821	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C902	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C302	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C401	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C403	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C421	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C402	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
2	C404	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
2	C408	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-.5mm	
2	C414	2401-002597	C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
2	C418	2401-002597	C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
2	C422	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
2	C424	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
2	C601	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
2	C610	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C611	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C415	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C612	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C613	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C617	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C917	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C413	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C622	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C625	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C626	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C628	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C623	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C624	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C627	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C629	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C642	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C644	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C701	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C638	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C639	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C249	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C632	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
2	C634	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C826	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C832	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C838	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C637	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C640	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C641	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C643	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C647	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
2	C649	2301-000108	C-FILM,PEF;1.5nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C804	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
2	C805	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
2	C807	2301-001397	C-FILM,PPF;2.2nF,5%,1.2kV,TP,15x8.5x13.5	
2	C814	2201-000406	C-CERAMIC,DISC;0.27NF,10%,2KV,Y5P,TP,6.3	
2	C817	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C819	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C822	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C818	2401-000722	C-AL;2200uF,20%,25V,WT,TP,16x25,7.5	
2	C910	2201-000980	C-CERAMIC,DISC;0.03NF,5%,50V,C0G,TP,5X3M	
2	C911	2201-000980	C-CERAMIC,DISC;0.03NF,5%,50V,C0G,TP,5X3M	
2	C913	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C915	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C918	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C210	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D202	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D207	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D208	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D209	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D210	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D211	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D602	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D804	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DZ402	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D906	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D405	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D411	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D803	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D816	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
⚠ 2	D404	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
⚠ 2	D402	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
⚠ 2	D403	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D406	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D810	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D811	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D907	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D413	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
⚠ 2	D801	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
2	DZ201	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ202	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ802	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ902	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ601	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ603	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ906	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ907	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ909	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ910	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ604	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ605	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ908	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ203	0403-001321	DIODE-ZENER;MTZJ6.8C,6.66-7.01V,500mW,DO	
2	DZ302	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ303	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ304	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ305	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ306	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ804	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ401	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
2	DZ801	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ808	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ204	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ205	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT102	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT301	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT302	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT401	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT402	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT801	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT103	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT409	AA60-40014A	PIN-GT,ASSY;AUTO	
2	J102	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J103	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J105	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J108	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J111	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J112	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J113	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J114	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J115	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J116	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J117	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J119	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J122	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J123	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J124	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J203	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J205	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J206	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J207	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J208	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J209	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J210	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J212	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J213	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J214	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J216	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J217	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J218	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J219	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J222	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J223	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J224	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J225	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J226	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J227	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J228	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J229	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J230	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J232	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J234	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J236	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J237	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J238	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J239	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J242	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J244	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J246	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J247	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J248	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J401	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J402	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J404	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J409	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J412	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J414	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J416	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J421	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J422	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J424	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J428	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J601	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J602	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J603	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J604	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J606	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J607	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J611	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J614	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J615	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J616	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J617	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J618	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J619	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J620	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J621	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J622	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J624	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J627	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J629	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J631	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J632	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J703	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J704	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J708	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J715	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J716	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J717	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J805	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J806	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J807	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J810	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J811	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J816	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J819	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J820	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J821	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J824	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J826	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J829	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J830	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J831	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J832	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J833	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J909	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J911	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J912	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J913	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J915	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J916	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J917	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J924	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J925	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J926	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J927	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J928	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J932	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J933	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J934	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J936	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J939	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J941	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J942	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R939	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J714	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J249	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	D908	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J835	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J425	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J633	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J818	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J612	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L610	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J937	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J918	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J626	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J126	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J118	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J101	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J253	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J943	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J944	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J705	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J707	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J127	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J605	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J608	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J609	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L107	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J902	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
⚠ 2	D407	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J407	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J419	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J801	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J802	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J803	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J804	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J211	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J241	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L410	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J834	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J204	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R926	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J701	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J817	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L413	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J940	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J623	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	EY301	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY302	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY303	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY304	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY413	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY418	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY424	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY425	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY426	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY427	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY428	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY429	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY430	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY431	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY432	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY433	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY434	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY435	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY436	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY437	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY438	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY439	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY440	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY441	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY442	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY443	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY444	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY445	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY446	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY447	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY448	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY449	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY450	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY451	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY452	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY453	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY454	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY455	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY456	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY457	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY458	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY601	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY602	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY603	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY604	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY701	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY702	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY703	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY704	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY804	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY805	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY806	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY811	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY812	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY814	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY815	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY816	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY817	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY820	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY826	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY831	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY832	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY834	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY835	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY836	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY837	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY838	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY839	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY840	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY841	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY842	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY844	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY845	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY846	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY847	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY848	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY849	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY854	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY855	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY856	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY857	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY858	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY859	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	TOP1	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	TOP2	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL401	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL402	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL405	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL406	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL803	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL805	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL806	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL807	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL808	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL809	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL810	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL811	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R236	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R237	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R238	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R247	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R622	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R621	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R935	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R202	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R243	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R245	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R246	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R310	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R716	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R606	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R602	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R601	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R620	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R629	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R309	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R609	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R952	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R940	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R941	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R942	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R947	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R948	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R102	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R103	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R604	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R605	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R610	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R611	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R612	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R613	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R628	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R627	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R706	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R707	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R708	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R907	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J920	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J904	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R925	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R955	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R231	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R232	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	L211	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 2	RR430S	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R418	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
⚠ 2	RY801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY802S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	VP801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	X901	2801-003728	CRYSTAL-UNIT;6MHz,30ppm,28-AAM,20pF,40oh	
2	L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C707	2401-000939	C-AL;22uF,20%,25V,GP,TP,5x11,5	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L406	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L907	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L711	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L108	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L109	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L222	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L302	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L804	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L809	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J901	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L303	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L207	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L412	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J406	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L407	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L601	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L609	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L201	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L604	2701-000169	INDUCTOR-AXIAL;3.9uH,10%,2.5x3.4mm	
2	L905	2701-000211	INDUCTOR-AXIAL;68uH,10%,2.5x3.4mm	
2	Q201	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q203	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q906	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q908	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q204	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q907	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	R244	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R954	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R823	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R216	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R234	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R235	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R603	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R817	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R924	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R252	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R726	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R902	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R816	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R228	2001-000117	R-CARBON(S);68OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R301	2004-001397	R-METAL(S);4.7Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R423	2004-001397	R-METAL(S);4.7Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R303	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R828	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R314	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R411	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R412	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R421	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R913	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R426	2003-000540	R-METAL OXIDE(S);1Kohm,5%,2W,AF,TP,4x12m	
2	R434	2003-000664	R-METAL OXIDE(S);33ohm,5%,2W,AF,TP,4x12m	
2	R614	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R615	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R616	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R617	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R226	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R931	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R812	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R831	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R956	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R214	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R701	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R702	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R703	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R704	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R705	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R242	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R802	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R803	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R804	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R805	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R806	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R813	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R832	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R810	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R819	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R820	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R822	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R824	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R825	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R901	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R905	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R906	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R921	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R927	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R928	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R937	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R724	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R725	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R251	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R223	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R248	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R249	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R250	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R207	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R911	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R922	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R923	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	C411	2301-000104	C-FILM,PEF;1.2NF,5%,50V,TP,6.5X3.0X5.5MM	
2	C412	2301-000313	C-FILM,PEF;8.2nF,5%,100V,TP,7x3.2x7mm,5m	
2	C427	2401-002267	C-AL;2.2uF,20%,250V,GP,TP,8x11.5,5	
2	C833	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C229	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
2	CN901	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
2	CW901	2503-000156	C-NETWORK;100pFx4,20%,50V	
2	D203	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D204	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D205	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D206	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D901	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D902	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D903	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D904	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	DZ803	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
⚠ 2	FA802S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
2	HIC202	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC203	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC204	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC201	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	R302	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R409	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	R410	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	R413	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R424	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R425	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R405	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R827	2008-000284	R-FUSIBLE(S);0.1OHM,10%,2W,AF,TP,3.9X10M	
2	R829	2008-001029	R-FUSIBLE(S);5.6ohm,5%,2W,AF,TP,3.9x10mm	
2	R835	2003-002181	R-METAL OXIDE(S);68Kohm,5%,2W,AG,TP,3.9x	
2	R836	2003-002181	R-METAL OXIDE(S);68Kohm,5%,2W,AG,TP,3.9x	
2	R433	2003-001042	R-METAL OXIDE(S);5.6Kohm,5%,2W,AF,TP,3.9	
2	R717	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R105	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	X201	2801-003432	CRYSTAL-UNIT;20.25MHZ,30PPM,28-AAM,13PF,	
2	X601	2801-003903	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,12pF	
2	IC904	1203-001943	IC-VOL. DETECTOR;7025,TO-92,3P,-,PLASTIC	
2	PCB	AA41-00168H	PCB-MAIN;CS29A6,FR-1,1L,H,1.6T,330X245,K	
2	Q909	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
2	Q910	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
2	R403	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
2	L705	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L706	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L605	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L606	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L607	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L608	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L701	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	R106	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R313	2004-001137	R-METAL;6.8Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R710	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R241	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R315	2004-004970	R-METAL(S);62Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R811	2004-001408	R-METAL(S);91Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	R809	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	KEZI	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP,2.5x6.5m	
2	L901	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L903	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L904	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L909	2701-000191	INDUCTOR-AXIAL;47uH,10%,2.5x3.4mm	
2	L908	2701-000191	INDUCTOR-AXIAL;47uH,10%,2.5x3.4mm	
2	R818	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
2	CN702	3711-002647	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	
2	C656	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
2	C657	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
2	C306	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	R422	2001-000037	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4	
2	C621	2401-002458	C-AL;1000uF,20%,35V,GP,TP,16x25,7.5	
2	C824	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C823	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C808	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C115	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C116	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C244	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C245	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C250	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	L209	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L210	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L212	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L801	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
2	L806	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
2	R945	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R946	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C104	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
2	R210	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C835	2401-002289	C-AL;470uF,20%,35V,WT,TP,10x20,5	
2	C840	2401-002212	C-AL;10uF,20%,25V,WT,TP,5x11,5	
2	C827	2401-002212	C-AL;10uF,20%,25V,WT,TP,5x11,5	
2	C301	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
2	C106	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
2	DZ602	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	R808	2001-001079	R-CARBON(S);15OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	C248	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	C246	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	R304	2008-001133	R-FUSIBLE(S);0.75ohm,5%,2W,AF,TP,3.9x10m	
2	C102	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
2	L208	2701-000147	INDUCTOR-AXIAL;2.2uH,5%,2.4x3.4mm	
2	C247	2202-000849	C-CERAMIC,MLC-AXIAL;0.018NF,5%,50V,C0G,T	
2		HA68-02176A	LABEL;LABEL	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	C654	2201-000611	C-CERAMIC,DISC;0.056NF,5%,50V,C0G,TP,7X3	
2	R305	2003-002205	R-METAL OXIDE(S);330ohm,5%,2W,AG,TP,3.9X	
2	R306	2003-002205	R-METAL OXIDE(S);330ohm,5%,2W,AG,TP,3.9X	
2	R414	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R420	2004-001406	R-METAL(S);8.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R428	2001-001047	R-CARBON(S);1.2MOHM,5%,1/2W,AA,TP,2.4X6.	
2	R429	2001-001103	R-CARBON(S);20KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R436	2003-002008	R-METAL OXIDE(S);18Kohm,5%,2W,AF,TP,3.9x	
2	R607	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R608	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	CN903	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
2	C409	2303-001001	C-FILM,PPF;22nF,5%,630V,TP,18x14.5x8.5mm	
2	CN502	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
2	CN704	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
2	R821	2004-001891	R-METAL(S);133Kohm,1%,1/2W,AA,TP,2.5x6.5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C410	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	R213	2001-000232	R-CARBON;1.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R404	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
2	C425	2301-001259	C-FILM,MPPF;100nF,5%,400V,TP,19x8x16,7.5	
2	R212	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
⚠ 2	FA803S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
2	DZ806	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
2	R401	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
2	R402	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
2	J914	2001-000674	R-CARBON;360OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	C925	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C420	2305-001003	C-FILM,MPEF;10nF,5%,250V,TP,13x4.5x9mm,7	
2	C828	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
2	J919	2701-000183	INDUCTOR-AXIAL;39uH,5%,2.5x3.4mm	
2	C203	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	R944	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	L910	2701-000215	INDUCTOR-AXIAL;8.2uH,10%,2.5x3.4mm	
2	C926	2202-000154	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
⚠ 2	FP801S	3601-000297	FUSE-CARTRIDGE;250V,5A,TIME-LAG,GLASS,5.	
⚠ 2	RX801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
2	R415	2004-004083	R-METAL(S);3.6Kohm,2%,1/2W,AA,TP,2.5x6.5	
2	D408	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
2	R826	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
2	CN501	3711-002641	CONNECTOR-HEADER;BOX,10P,1R,2.54mm,STRAI	
2	CN801	3711-004721	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2	CN802	3711-004720	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2	S/W	AA95-01553A	ASSY ETC-PCB SVHS BOARD;,ALL WITH SVHS,K	
3	ICS01	1001-001114	IC-VIDEO SWITCH;TEA6425,VIDEO SWITCH ,DI	
3	CNS01	3711-002704	CONNECTOR-HEADER;NOWALL,6P,1R,2.5mm,ANGL	
3	CNS02	3711-002706	CONNECTOR-HEADER;NOWALL,8P,1R,2.5mm,ANGL	
3		HA99-500031	ASSY-PCB,VIDEO-S/W(ACI);50Hz,32W8,KS3A,F	
4	CS01	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
4	CS03	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
4	CS04	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
4	CS05	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
4	CS06	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
4	CS02	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
4	CS07	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
4	JS01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	JS02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	JS03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	JS04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	RS08	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	RS09	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	QS01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QS02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QS03	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	RS01	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS05	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS07	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS10	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS11	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS02	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RS04	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RS06	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	LS01	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	PCB	AA41-00153E	PCB-VIDEO SWITCH;CS29A6,FR-1,1L,E,1.6T,2	
4	CS08	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
4	DZS01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZS02	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	RS12	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS13	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
3		HA98-600012	ASSY-SUB,PART;PCB-WIDE,S51A,WIDE	
4		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
4		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
4		0204-001024	FLUX;DF-98TVS,-,20%,-	
4		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2		AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
2	C830	2303-000296	C-FILM,PPF;18nF,0.05,630V,BK,20x16x9.5mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
			ASSY CRT	
1		HA94-01694A	ASSY CRT;W76EGX023X215,+380MG,32,ITC,-	
⚠ 2		AA03-00107A	CRT COLOR;W76EGV023X215,+380mG,1.15mH,12	
2		AA39-20518A	LEAD CONNECTOR-ASSY;,6(4)P,350MM,YFH806-	
2		AA27-00043A	COIL DEGAUSSING;-,32,-,70T,3700,E	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-00026A	ASSY TBC WIRE(P);DP,32INCH,AA98-70012C,2	
			ASSY PCB MISC-CONTROL	
1		AA94-12332A	ASSY PCB MISC-CONTROL;28V6,KS3A,PAL	
2		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
2		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2		0204-001024	FLUX;DF-98TVS,-,20%,-	
2	LDY01	0601-000198	LED;ROUND,RED/GRN,5.0mm,630/565nm	
⚠ 2	PD811S	3711-004696	CONNECTOR-HEADER;NOWALL,3P,1R,5MM,ANGLE,	
⚠ 2	PD812S	3711-004697	CONNECTOR-HEADER;NOWALL,3P,1R,5MM,ANGLE,	
2	Bracke	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	
2	Bracke	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
2	CNY02	AA39-20005B	LEAD CONNECTOR-ASSY;,3P,300MM,YBNH025-03	
2	CNY01	AA39-20069A	LEAD CONNECTOR-ASSY;,5P,500,YBNH025-05,6	
2	CN811	AA39-20179A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YFH800-	
2		AA61-00530B	BRACKET-MASTER;25M6,29M6,SECC	
2		AA97-13500A	ASSY AUTO-CONTROL;32V6,KS3A,PAL(SEH)	
3	DY02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	DY01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	DZY01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
3	DZY02	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
3	RY03	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RY05	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RY01	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,TP,2.4X6.4M	
3	RY02	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RY04	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	LY01	2701-000136	INDUCTOR-AXIAL;18uH,10%,2.5x3.4mm	
3	PCB	AA41-00799A	PCB-CONTROL;28V6/32V6,CEM-1,1L,A,1.6T,24	
3	EL01	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	EL02	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	EL03	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	EL04	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	SWY02	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY03	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY04	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY05	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY06	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	CY01	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
			ASSY PCB CRT	
1		AA95-01532A	ASSY PCB CRT;,KS3A,28,32,W5-W6-W7,50HZ	
2	VA999	3704-000114	SOCKET-CRT;14P,29.1,35.5,SN,ISH09S/BK	
2	QF04	HA96-50149A	ASSY-H/S;-,AA62-30013A,2SC2344,-	
3		0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
3	SCR09	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S09	AA62-30013A	HEAT SINK-ES;-,A6063 EXTR,-,-,45(21) T02	
2	QF05	HA96-50149B	ASSY-H/S;-,TR,AA62-30013A,2SA1011,-	
3	QV10	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
3	SCR10	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S10	AA62-30013A	HEAT SINK-ES;-,A6063 EXTR,-,-,45(21) T02	
2	IC501	HA96-50151A	ASSY-H/S;-,TR,AA61-10060A,TDA6101Q,-	
2	IC502	HA96-50151A	ASSY-H/S;-,TR,AA61-10060A,TDA6101Q,-	
2	IC503	HA96-50151A	ASSY-H/S;-,TR,AA61-10060A,TDA6101Q,-	
3		1201-000539	IC-VIDEO AMP;6101,ZIP,9P,-,SINGLE,-,PLAS	
3		6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	
3		6021-000154	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C	
3	BRC501	AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-,-	
2		HA68-02176A	LABEL;LABEL	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	GT501	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT507	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT503	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT504	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT505	AA60-40014A	PIN-GT,ASSY;AUTO	
2	EL81	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL82	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL83	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL84	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL85	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL86	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL87	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL88	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL89	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL90	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL91	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL92	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL93	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	J501	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J502	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J503	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J506	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J507	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J508	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J509	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J510	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J511	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L502	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J512	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J513	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J514	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J516	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J520	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J521	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J523	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J524	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J526	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J527	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J528	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J529	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J530	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R546	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF06	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF07	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R504	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R509	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J515	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R539	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	DF01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DF04	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D502	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D507	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D508	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D509	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D510	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D511	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D512	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF02	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF03	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DZ503	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
2	Q501	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	QF03	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	QF01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	QF02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	RF09	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF12	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF10	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF11	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R521	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R526	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF08	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF03	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R529	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R530	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R536	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF05	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF02	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R520	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF06	2001-000989	R-CARBON;820KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R517	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF14	2001-001071	R-CARBON(S);12KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R502	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R507	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R512	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
2	RF15	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF17	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF13	2001-001179	R-CARBON(S);68KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF16	2001-001179	R-CARBON(S);68KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R503	2001-001194	R-CARBON(S);82KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R508	2001-001194	R-CARBON(S);82KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R513	2001-001194	R-CARBON(S);82KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R505	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R510	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	RF18	2003-000458	R-METAL OXIDE(S);100ohm,5%,2W,AF,TP,4x12	
2	RF23	2003-000746	R-METAL OXIDE(S);56ohm,5%,2W,AF,TP,4x12m	
2	RF24	2003-000746	R-METAL OXIDE(S);56ohm,5%,2W,AF,TP,4x12m	
2	RF19	2003-001023	R-METAL OXIDE(S);120ohm,5%,2W,AF,TP,3.9x	
2	RF20	2003-001045	R-METAL OXIDE(S);680ohm,5%,2W,AF,TP,3.9x	
2	RF21	2003-001045	R-METAL OXIDE(S);680ohm,5%,2W,AF,TP,3.9x	
2	RF22	2003-001045	R-METAL OXIDE(S);680ohm,5%,2W,AF,TP,3.9x	
2	RF25	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	RF07	2004-001989	R-METAL;620ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	CF01	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
2	CF03	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
2	CF06	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP,	
2	C503	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C506	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C509	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	CF04	2201-000653	C-CERAMIC,DISC;0.068NF,5%,50V,SL,TP,5X3M	
2	CF08	2201-000653	C-CERAMIC,DISC;0.068NF,5%,50V,SL,TP,5X3M	
2	CF14	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
2	CF02	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C516	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C518	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C519	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C520	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C521	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C522	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C523	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	CF05	2301-000261	C-FILM,PEF;4.7nF,5%,100V,TP,10.5x12.5x6.	
2	C502	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C505	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C508	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	CF07	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C514	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C512	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C515	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C526	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C511	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	CF10	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	CF12	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	L501	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
2	LF02	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
2	LF01	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L505	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L506	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	PCB	AA41-00210D	PCB-CRT;CS29A6,FR-1,1L,D,1.6T,330x245,KS	
2	DZF01	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
2	DZF02	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
2	R522	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R527	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R525	2003-001043	R-METAL OXIDE(S);510ohm,5%,1W,AF,TP,2.5x	
2	R518	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	L503	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L504	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	LF04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	LF05	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	R519	2002-001009	R-COMPOSITION;2.7Kohm,10%,1/2W,AA,TP,3.7	
2	L507	2701-000215	INDUCTOR-AXIAL;8.2uH,10%,2.5x3.4mm	
2	SG501	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG503	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG504	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG505	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	R501	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
2		HA98-00003A	ASSY SUB PART;ASSY-SUB,PART;S53A,PCB,CRT	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
2	GT507	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
2	CN501A	AA39-00225A	LEAD CONNECTOR-ASSY;,10P,600MM,67096-010	
2	CN501A	3711-002641	CONNECTOR-HEADER;BOX,10P,1R,2.54mm,STRAI	
2	CN502A	AA39-20029K	LEAD CONNECTOR-ASSY;,7P,400,67096-007,S,	
2	CNF01	AA39-20033C	LEAD CONNECTOR-ASSY;,3(2)P,200,67096-003	
2	CF11	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	C513	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
2	R523	2008-000265	R-FUSIBLE(S);1ohm,5%,2W,AA,TP,3.9x10mm	
2	C510	2401-001525	C-AL;47uF,20%,250V,GP,BK,16x25mm,7.	
2	JA501	3722-001503	JACK-PIN;1P,1PI,NI,RED,SCR-JACK	
2	CNF01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
2	CN502A	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	

ASSY ETC-PCB A/V BOARD

1		AA95-01513A	ASSY ETC-PCB A/V BOARD;,29K8,KS3A,100HZ	
2	JH701	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
2	JA701	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
2	JS701	3722-001163	JACK-VHS;4P,12mm,AU,BLK,N	
2	CN704	AA39-00070A	LEAD CONNECTOR-ASSY;,4P,200MM,YBNH250-04	
2	CN705	AA39-20009E	LEAD CONNECTOR-ASSY;,1P,600,YFH800-01,16	
2	CN701	AA39-20068G	LEAD CONNECTOR-ASSY;,8P,700MM,YBNH025-08	
2	CN703	AA39-20069A	LEAD CONNECTOR-ASSY;,5P,500,YBNH025-05,6	
2	CN702	AA39-20070J	LEAD CONNECTOR-ASSY;,7P,700MM,YBNH250-07	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-00246A	ASSY SUB PART;S51A,CONTROL WIDE	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2	R701	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R702	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
2	C701	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C702	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C707	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C708	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C703	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C704	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C705	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
2	C706	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
2	L701	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L702	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L703	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L704	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	KEZI	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L705	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L706	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L707	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L708	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	PCB	AA41-00345A	PCB-SIDE A/V;CS29K1,FR-1,1L,A,1.6T,245x2	

ASSYPCB-PFC

1		HA94-05786B	ASSYPCB-PFC;28W8/Z4-29A8/K8,50HZ,5786A	
2	EYP07	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP08	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP09	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP10	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP11	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP12	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP13	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP14	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP15	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP16	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP17	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP18	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP01	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP02	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP03	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP04	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP05	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP06	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	PCB	AA41-00404A	PCB-PFC;CS2539,FR-1,1L,A,1.6T,330x245,KS	
2	JP801	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JP802	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	CNP02	AA39-00236A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YHL500-	
2	PFT01	AA27-00116A	COIL CHOKE;CODE_NO,-,35mH,-0, +5%,-,2.8O	
2		HA98-600020	ASSY-SUB,PART;KS4A,PFC PCB	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2		HA61-00987A	HOLDER-PFC;32W8,29A8,28W8,HIPS,ALLFLAT	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2	CNP02	3711-004721	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2		6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	CNP01	AA39-00235A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YHL500-	
2	CNP01	3711-004720	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
⚠ 2	LX803S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,+-	
⚠ 2	CX803S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	

ASSY COVER FRONT

1		AA90-04479A	ASSY COVER FRONT;32V6	
2	CB+SCR	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CF+PCB	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
2	CRT+CF	AA60-10050V	SCREW-ASSY;-,SWRCH18A,M6,L30,HH,+,WC,-,Z	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	rating	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
2		AA96-01297A	ASSY COVER P-FRONT;32V6,HIPS HB,SILVER	
3	CF+KC	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	CF+SPK	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	CF+WR	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3		AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	
3		AA64-03142A	KNOB-CONTROL;28V6 SEH,ABS,HB,G3676,SVM30	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		AA64-03144A	WINDOW-RMC,LED;28V6 SEH,PC,CLR	
4		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
3		AA64-70117B	BADGE-BRAND;-,AL,-,-,L65,R2000,SILVER,SS	
3	POWER	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
3		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
3		AA64-03141A	CABINET-FRONT;32V6 SEH,HIPS,HB,G4309,SV0	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		AA64-03143A	KNOB-POWER;28V6 SEH,ABS,HB,G3676,SVM3012	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA61-00711C	HOLDER-PCB;29K8,HIPS,HB,GRY	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3		AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	
3		AA39-00102A	LEAD CONNECTOR-ASSY;,4P,900,700MM,35155-	
3		3001-001005	SPEAKER;10W,8OHM,91DB,140HZ	
3		AA64-01506D	INLAY-AV;29K3,PVC-SHEET,T0.3,-,-,P/GRAY,	
3		AA64-03145A	DECORATION-POWER;28V6 SEH,ABS,HB,G3676,S	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	CF+CB	6003-001025	SCREW-TAPTITE;RH,+,B,M4,L20,ZPC(BLK),SWR	
2		AA65-30113A	CLAMPER CORE-D,COIL;-,NYLON 66,V2,-,BLK,	

ASSY COVER REAR

1		AA90-04481A	ASSY COVER REAR;32V6,SEH	
2		HA64-02529C	CABINET-BACK;32M6,VL-1823,GRY	
3		AA81-00096A	RESIN-A;VL-1823,G5433,A	
3		AA63-60001L	SPACER-FELT;-,FELT,-,-,-,BLK,T0.35,-,150	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	
2		AA64-00894L	INLAY-BACK;21K2,PS SHEET,T0.3,BLK,KS1B 2	
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	

ASSY P/MATERIAL

1		AA92-07507A	ASSY P/MATERIAL;32V6	
2		0203-001096	TAPE-CELLULOSE;#301,T0.06,W75,L400,WHT	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		AA69-00744F	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1400,H1	
2		AA69-01895A	CUSHION SET;32V6(SEH),PS FOAMED,C=0.02	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	

ASSY ACCESSORY

1		AA94-05820A	ASSY ACCESSORY;50HZ,KS3A,XEC	
2		4301-000120	BATTERY-MN;1.5V,-,AA,14.5x50mm,-	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO	
2		HA68-00335A	LABEL CAUTION;A/P100(G),S51A,HUN,POL,-,-	
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I	

ASSY POWER CORD

⚠ 1		AA96-01126B	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C40	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,V0,KE-002	

ASSY BOX

1		AA92-07500A	ASSY BOX;32V6	
2		AA69-01951A	PACKING CASE;32V6(SEH),D-4 AB,A1,985,665	
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE	
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM	

REMOCON

1		AA59-00104K	REMOCON;-,TM59,DREAM,29,L/GRAY,PAL-TTX	

7-6 WS32V66VS8XXEC

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-05592B	ASSY PCB MAIN(OPT);WS32W7DH,KS3A/H,TH,IN	
2	C815	2401-003602	C-AL;220uF,20%,160V,GP,BK,22x25mm,1	
2	CN501	3711-002641	CONNECTOR-HEADER;BOX,10P,1R,2.54mm,STRAI	
⚠ 2	CX801S	2306-000321	C-FILM,MPPF;470NF,5%,275V,TP,-,22.5	
2	IC301	HA96-50406B	ASSY-H/S;ASSY-H/S;-,AA62-30180B,LA7845	
3		1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
3		AA62-30180B	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,70MM,-,	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC401	1202-000103	IC-VOLTAGE COMP.;393,DIP,8P,300MIL,DUAL,	
⚠ 2	IC801S	HA96-50371C	ASSY H/S;-,-,AA62-30181H,KA3A1265R,-	
3		AA13-00101A	IC HYBRID;KA3S1265RD,CN5039,5PIN,-,50TO12	
3		AA61-10386A	BRACKET-IC;-,SECC 100,T1.0,-,-,-,KA2S068	
3		AA62-30197D	HEAT SINK-ES;DP,-,-,-,AA62-30181H,-,-,-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	JA701	3722-000195	JACK-SCART;42P,-,SN,BLK,NO	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	PC801S	0604-001038	PHOTO-COUPLER;TR,130-260%,200mW,DIP-4,ST	
⚠ 2	PT801S	1404-000002	THERMISTOR-PTC;9ohm,20%,-,-,TR,RECT,-	
⚠ 2	RL801S	3501-001040	RELAY-POWER;12VDC,500mW,10A,1FormA,15mS,	
2	HC801	HA96-00274B	ASSY-H/S;-,COMPLEX,AA62-00066B,FMLG12S	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	
⚠ 3	D802	0402-001230	DIODE-RECTIFIER;FMG-G2CS,1000V,3A,TO-220	
⚠ 3	D805	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	D806	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	D807	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
⚠ 3	IC805	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	HC401	HA96-00275D	ASSY-H/S;-,COMPLEX,AA62-00051B,2SC5446	
3		AA62-00067B	HEAT SINK-PS;-,DP,-,-,-,-,AA62-00051B,-	
⚠ 3	D414	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
3	Q401	0502-001175	TR-POWER;2SC5446,NPN,200000mW,TO-3PL,BK	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	
3		AA62-00092A	HEAT SINK;STB,A6063 EXTR.,T1.3,28*28,H12	
3	Q401	AA02-00007A	SUB ETC-MICA;,MICA,22X30X0.1MM	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	D801S	0402-001399	DIODE-BRIDGE;GSIB660,600V,6A,SIP-4,BK	
2	IC602	HA96-50369B	ASSY-H/S;-,-,AA62-30181F,TDA7297,-	
3		1201-001064	IC-POWER AMP;7297,ZIP,15P,-,DUAL,32dB,PL	
3		AA62-30181F	HEAT SINK-ES;-,AL6063 EXTR.,2,WHT,50MM,-	
3		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	IC902	1103-001171	IC-EEPROM;L51DC,16KBit,DIP,8P,300MIL,10m	
2	C105	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C103	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C101	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C416	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C909	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C228	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C230	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C809	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C810	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C811	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
2	C202	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C205	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C920	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C231	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C215	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C630	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C631	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C645	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C652	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C603	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C207	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C708	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C239	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
2	C214	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C605	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C620	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C635	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C646	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C829	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C837	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C839	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C916	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C914	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C831	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C825	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C240	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C636	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
2	C905	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C607	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C608	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C211	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C212	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C213	2301-000247	C-FILM,PEF;33nF,5%,50V,TP,8.1x4.5x13mm,5	
2	C218	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C219	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C220	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C901	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C921	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C922	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C919	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C924	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C907	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C308	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C237	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C604	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C201	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C841	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C304	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C305	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
2	C821	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C902	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C302	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C401	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C403	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C421	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
2	C402	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
2	C404	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
2	C408	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	
2	C414	2401-002597	C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
2	C418	2401-002597	C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
2	C422	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
2	C424	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
2	C601	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
2	C610	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C611	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C612	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C613	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C209	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
2	C617	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C917	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C413	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	C623	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C624	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C627	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C629	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C642	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C644	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C638	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C639	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C249	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C632	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
2	C634	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C832	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C838	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C826	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C637	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C640	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C641	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C643	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C912	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C647	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
2	C649	2301-000108	C-FILM,PEF;1.5nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C804	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
2	C805	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
2	C807	2301-001397	C-FILM,PPF;2.2nF,5%,1.2kV,TP,15x8.5x13.5	
2	C814	2201-000406	C-CERAMIC,DISC;0.27NF,10%,2KV,Y5P,TP,6.3	
2	C817	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C819	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C822	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C818	2401-000722	C-AL;2200uF,20%,25V,WT,TP,16x25,7.5	
2	C910	2201-000980	C-CERAMIC,DISC;0.03NF,5%,50V,C0G,TP,5X3M	
2	C911	2201-000980	C-CERAMIC,DISC;0.03NF,5%,50V,C0G,TP,5X3M	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D202	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D207	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D208	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D209	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D210	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D211	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D602	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D804	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DZ402	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D906	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D405	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D401	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
⚠ 2	D402	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
⚠ 2	D404	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
⚠ 2	D411	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
⚠ 2	D407	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
⚠ 2	D406	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D808	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D810	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D811	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D907	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D403	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D801	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
2	DZ201	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ202	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ802	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ902	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ601	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ603	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ806	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ906	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ907	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ909	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ910	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ604	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ605	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ908	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ203	0403-001321	DIODE-ZENER;MTZJ6.8C,6.66-7.01V,500mW,DO	
2	DZ302	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ303	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ304	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
2	DZ305	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ306	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ804	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ401	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
2	DZ801	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ808	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ204	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ205	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT102	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT301	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT302	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT401	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT402	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT801	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT404	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT409	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT103	AA60-40014A	PIN-GT,ASSY;AUTO	
2	J102	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J103	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J105	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J111	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J112	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J114	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J115	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J116	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J117	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J119	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J122	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J123	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J124	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J203	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J205	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J206	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J207	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J208	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J209	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J210	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J211	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J212	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J213	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J214	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J215	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J216	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J217	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J218	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J219	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J222	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J223	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J224	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J225	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J227	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J228	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J229	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J230	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J232	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J234	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J236	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J237	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J238	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J239	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J241	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J244	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J246	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J247	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J248	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J401	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J402	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J404	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J409	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J416	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J421	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J422	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J424	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J428	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J601	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J602	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J603	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J604	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J606	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J607	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J611	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J614	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J615	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J616	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J617	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J618	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J619	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J620	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J621	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J622	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J624	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J627	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J629	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J631	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J632	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J703	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J704	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J708	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J715	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J716	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J717	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J801	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J802	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J803	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J804	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J805	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J806	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J807	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J810	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J811	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J816	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J819	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J820	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J821	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J824	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J826	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J829	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J830	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J831	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J832	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J833	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J909	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J911	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J912	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J913	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J915	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J916	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J924	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J925	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J926	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J927	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J928	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J931	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J932	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J933	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J934	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J936	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J941	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J942	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R939	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J714	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J249	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	D908	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J835	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J425	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J633	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J818	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J612	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L610	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J940	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J937	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J918	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J907	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J906	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J626	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J121	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J118	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J101	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J253	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J943	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J944	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J705	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J707	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J407	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J605	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J608	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J609	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J419	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J126	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J108	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J127	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L107	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R223	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R234	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L410	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J914	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J254	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J411	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	C221	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	C222	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	C223	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J412	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L204	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L804	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J204	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J701	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J817	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L413	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R926	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J902	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	C232	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J623	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	L211	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	RH29	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J226	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J430	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	EY301	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY302	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY303	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY304	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY413	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY418	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY424	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY425	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY426	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY427	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY428	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY429	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY430	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY431	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	EY432	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY433	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY434	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY435	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY436	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY437	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY438	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY439	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY440	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY441	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY442	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY443	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY444	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY445	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY446	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY447	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY448	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY449	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY450	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY451	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY452	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY453	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY454	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY455	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY456	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY457	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY458	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY601	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY602	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY603	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY604	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY701	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY702	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY703	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY704	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY804	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY805	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY806	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY811	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY812	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY814	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY815	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY816	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY817	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY820	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY826	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY831	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY832	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY834	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY835	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY836	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY837	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY838	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY839	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY840	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY841	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY842	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY844	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY845	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY846	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY847	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY848	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY849	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY854	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY855	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY856	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY857	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY858	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY859	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	TOP1	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	TOP2	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL401	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL402	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL405	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL406	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL803	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL805	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL806	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL807	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL808	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL809	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL810	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL811	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	R236	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R237	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R238	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R247	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R235	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R622	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R621	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R935	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R202	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R243	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R245	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R246	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R310	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R716	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R606	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R620	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R629	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R309	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R609	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R211	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R952	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R940	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R941	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R942	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R947	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R948	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R102	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R103	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R604	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R605	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R610	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R611	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R612	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R613	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R628	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R627	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R907	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J904	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R925	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J920	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R955	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R231	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R232	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 2	RY801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY802S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	VP801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	X901	2801-003728	CRYSTAL-UNIT;6MHz,30ppm,28-AAM,20pF,40oh	
2	L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C707	2401-000939	C-AL;22uF,20%,25V,GP,TP,5x11,5	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L406	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L907	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L711	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L108	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L109	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	R706	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	R707	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	R708	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L902	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L222	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L302	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L809	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J901	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L303	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L207	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J406	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L412	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L407	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L601	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L609	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	R233	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L201	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	C233	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	C234	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	C235	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	C236	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L604	2701-000169	INDUCTOR-AXIAL;3.9uH,10%,2.5x3.4mm	
2	Q201	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q203	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q906	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q908	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q204	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q907	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	R244	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R954	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R823	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R216	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R603	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R817	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R924	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R936	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R252	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R726	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R254	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R601	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R602	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R902	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R816	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R228	2001-000117	R-CARBON(S);680HM,5%,1/2W,AA,TP,2.4X6.4M	
2	R303	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R828	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R314	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R411	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R412	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R422	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R421	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R432	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R913	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R426	2003-000540	R-METAL OXIDE(S);1Kohm,5%,2W,AF,TP,4x12m	
2	R614	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R615	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R616	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R617	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R226	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R812	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R831	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R931	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R956	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R214	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R704	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R242	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R802	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R803	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R804	2003-001025	R-METAL OXIDE(S);15Kohm,5%,2W,AF,TP,3.9x	
2	R805	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R806	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R813	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R832	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R810	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R418	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R819	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R301	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
2	R820	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R822	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R824	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R825	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R901	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R905	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R906	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R921	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R927	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R928	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R937	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R938	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R833	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R724	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R725	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R253	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R248	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R249	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R250	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R911	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R922	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R923	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	C833	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C229	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
2	CN901	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
2	CN903	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
2	CW901	2503-000156	C-NETWORK;100pFx4,20%,50V	
2	D203	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D204	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D205	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D206	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	D901	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D902	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D903	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	D904	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100mA,DO-34,TP	
2	DZ803	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
2	FA802S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
2	HIC201	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC202	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC203	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	HIC204	AA13-00093A	IC HYBRID;-,DRGB001A,SIP,5P,-,TP	
2	R409	2003-001018	R-METAL OXIDE(S);220ohm,5%,2W,AF,TP,3.9x	
2	R410	2003-001018	R-METAL OXIDE(S);220ohm,5%,2W,AF,TP,3.9x	
2	R413	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R424	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
2	R827	2008-000284	R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
2	R829	2008-001029	R-FUSIBLE(S);5.6ohm,5%,2W,AF,TP,3.9x10mm	
2	R835	2003-002181	R-METAL OXIDE(S);68Kohm,5%,2W,AG,TP,3.9x	
2	R836	2003-002181	R-METAL OXIDE(S);68Kohm,5%,2W,AG,TP,3.9x	
2	R433	2003-001042	R-METAL OXIDE(S);5.6Kohm,5%,2W,AF,TP,3.9	
2	R717	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R105	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	X601	2801-003903	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,12pF	
2	IC904	1203-001943	IC-VOL. DETECTOR;7025,TO-92,3P,-,PLASTIC	
2	PCB	AA41-00168H	PCB-MAIN;CS29A6,FR-1,1L,H,1.6T,330X245,K	
2	Q802	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	Q909	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
2	Q910	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
2	R434	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
2	R403	2003-001091	R-METAL OXIDE(S);10ohm,5%,2W,AF,TP,4x12m	
2	C113	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C925	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	L705	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L706	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L605	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L606	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L607	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L608	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L701	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	R106	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R313	2004-001137	R-METAL;6.8Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R710	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R241	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R811	2004-001408	R-METAL(S);91Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	R809	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	L901	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L903	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L904	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
2	L909	2701-000191	INDUCTOR-AXIAL;47uH,10%,2.5x3.4mm	
2	L908	2701-000191	INDUCTOR-AXIAL;47uH,10%,2.5x3.4mm	
2	R818	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
2	CN702	3711-002647	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	
2	C656	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
2	C657	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
2	C306	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C415	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C621	2401-002458	C-AL;1000uF,20%,35V,GP,TP,16x25,7.5	
2	C824	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C823	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	C115	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C116	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C701	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	L209	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L210	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L212	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L801	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
2	L806	3301-001223	CORE-FERRITE BEAD;AA,62ohm,3.5x0.8x5mm,-	
2	R945	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R946	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R821	2004-001891	R-METAL(S);133Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R210	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C835	2401-002289	C-AL;470uF,20%,35V,WT,TP,10x20,5	
2	C840	2401-002212	C-AL;10uF,20%,25V,WT,TP,5x11,5	
2	C827	2401-002212	C-AL;10uF,20%,25V,WT,TP,5x11,5	
2	R417	2004-001397	R-METAL(S);4.7Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	CN502	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
2	CN704	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
2	R808	2001-001079	R-CARBON(S);15OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R304	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
2	R307	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
2	R425	2008-001011	R-FUSIBLE(S);0.18ohm,10%,2W,AF,TP,3.9x10	
2		HA68-02176A	LABEL;LABEL	
2	R423	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
2	C654	2201-000611	C-CERAMIC,DISC;0.056NF,5%,50V,C0G,TP,7X3	
2	C425	2301-001259	C-FILM,MPPF;100nF,5%,400V,TP,19x8x16,7.5	
2	C622	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C625	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C626	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C628	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C104	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
2	C808	2401-003046	C-AL;47uF,20%,50V,WT,TP,6.3x11,2.5	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D803	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D816	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DZ602	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	R207	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R208	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R414	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	HIC401	AA13-00094A	IC HYBRID;-,DDRI001A,SIP,5P,-,TP	
2	R404	2001-003218	R-CARBON(S);0.18ohm,10%,1/2W,AA,TP,2.4x6	
2	C102	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
2	C913	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C915	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C918	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	C210	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	R420	2004-004015	R-METAL(S);9.1Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	C106	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
2	C303	2201-002103	C-CERAMIC,DISC;0.015NF,5%,500V,C0G,TP,6.	
2	C409	2301-001385	C-FILM,PPF;30nF,5%,630V,TP,20x15.5x10.5,	
2	C411	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C412	2301-000148	C-FILM,PEF;10nF,5%,100V,TP,7x3.2x7mm,5mm	
2	L905	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R302	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP,2.5x6.5m	
2	R305	2003-002205	R-METAL OXIDE(S);330ohm,5%,2W,AG,TP,3.9X	
2	R306	2003-002205	R-METAL OXIDE(S);330ohm,5%,2W,AG,TP,3.9X	
2	R415	2001-001099	R-CARBON(S);2.7KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R607	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R608	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R212	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
⚠ 2	FA803S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
2	R401	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
2	R402	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
2	D408	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
2	R407	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
2	C828	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
2	J919	2701-000183	INDUCTOR-AXIAL;39uH,5%,2.5x3.4mm	
2	R405	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	
2	R826	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
2	KEZI	2303-000296	C-FILM,PPF;18nF,0.05,630V,BK,20x16x9.5mm	
2	C410	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	C427	2401-002267	C-AL;2.2uF,20%,250V,GP,TP,8x11.5,5	
⚠ 2	D413	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
2	R436	2003-002008	R-METAL OXIDE(S);18Kohm,5%,2W,AF,TP,3.9x	
2	C203	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	R944	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	L910	2701-000215	INDUCTOR-AXIAL;8.2uH,10%,2.5x3.4mm	
2	C926	2202-000154	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
2	L208	2701-000147	INDUCTOR-AXIAL;2.2uH,5%,2.4x3.4mm	
2	C246	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	C248	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	C247	2202-000849	C-CERAMIC,MLC-AXIAL;0.018NF,5%,50V,C0G,T	
⚠ 2	RX801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	FP801S	3601-000297	FUSE-CARTRIDGE;250V,5A,TIME-LAG,GLASS,5.	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	RH28	2008-001113	R-FUSIBLE(S);0.22ohm,10%,2W,AG,TP,3.9x12	
⚠ 2	RR430S	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R429	2001-001112	R-CARBON(S);24KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R428	2001-001191	R-CARBON(S);820KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R315	2004-002022	R-METAL(S);51Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	IC901	AA09-00221A	IC MICOM;SIM806HEW2-A042,SIM806HEW2-A042	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	IC601	1204-001661	IC-SOUND PROCESSOR;MSP3411G-A2,DIP,52P,-	
⚠ 2	T401	AA26-50001S	TRANS-HORIZ.DRIVE;-,-,-,6.0mH,-,-,44uH,-	
⚠ 2	TU01S	AA40-00079A	TUNER;TCPW3001PD16A(S),PAL,181CH,38.	
2		AA98-00245A	ASSY SUB PART;S51A,PCB MAIN(OPT)	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
⚠ 2	T801S	AA26-00046B	TRANS SWITCHING;CODE-NO,CW6844N8X/XEF,-,	
⚠ 2	IC804	HA96-00243C	ASSY-H/S;-,REGULATOR,AA62-00045A,KA7806	
3		1203-000284	IC-POSI.FIXED REG.;7806,TO-220,3P,-,PLAS	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-,	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	L408	AA27-00031A	COIL HORIZ. WIDTH;-,140UH,AR 8X20,0.8MM,	
⚠ 2	LX801S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,+-	
2	L405	AA27-00057A	COIL HORIZ. WIDTH;-,10mH,YL-9N 15x27.5 C	
⚠ 2	IC803	1203-001697	IC-VOLTAGE REGULATOR;78R08,TO-220,4P,-,P	
2	Q404	HA96-00437A	ASSY-H/S;ASSY-H/S;AA62-00076A,IRF620	
3		0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		HA62-00076A	HEAT SINK;AL,100Hz,T1.0,10,40	
2	Q402	0505-001116	FET-SILICON;BUZ73A,N,200V,22A,0.6ohm,40W	
⚠ 2	CY802S	2201-002002	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,TP,16X	
2	C407	2301-001338	C-FILM,MPE-PPF;0.68nF,5%,1.6kV,TP,28x7x1	
2	C405	2306-000330	C-FILM,MPPF;7.7nF,3%,1.6KV,TP,28.5x18.5x	
2	C426	2301-001185	C-FILM,MPPF;620nF,5%,400V,TP,14.5x26x24,	
2	IC903	1203-001944	IC-POSI.FIXED REG.;78RM33,TO-220,3P,-,PL	
2	IC202	1203-001944	IC-POSI.FIXED REG.;78RM33,TO-220,3P,-,PL	
2	C806	2401-003031	C-AL;470uF,20%,450V,GP,BK,35x45mm,1	
2	C820	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM	
2	R807	2006-001083	R-CEMENT;120ohm,5%,5W,CJ,TP,14x10x27mm	
2	C423	2306-001017	C-FILM,MPPF;680nF,5%,400V,TP,26x14.5x24m	
2	C406	2303-001015	C-FILM,PPF;5.5nF,5%,1.6kV,TP,29x9.5x17,2	
2	L808	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
2	L402	AA27-10004F	COIL CHOKE;-,56uH,K,-,2.5A,BK,-,DR12x15,	
⚠ 2	T444S	AA26-00122A	TRANS FBT;1372.7021A,CT29D4,1.22MH,135V,	
⚠ 2	IC201S	HA98-00134B	ASSY-SIPADOSS MODULE;DP,KS3A,100HZ,SDA94	
3		AA95-00989A	ASSY ETC-CHROMA BODY;DP,-,KS3A,-,-,100HZ	
4	P1	3711-004782	CONNECTOR-HEADER;NOWALL,32P,1R,1.778MM,S	
4	P2	3711-004782	CONNECTOR-HEADER;NOWALL,32P,1R,1.778MM,S	
4	PCB	AA41-00411A	PCB-SIPADOS BODY;CS29A5,FR-4,2L,A,1.6T,1	
3	IC3	1204-001909	IC-VIDEO PROCESS;DDP3310B-F6,PLCC,68P,-,	
3	IC1	1204-001789	IC-VIDEO PROCESS;VPC3230D-B3,QFP,80P,787	
3	IC2	1204-001858	IC-PICTURE PROCESS;SDA9401,QFP,64P,-,PLA	
3	JP1	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
3	R17	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
3	R19	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
3	R7	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
3	L1	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
3	R10	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
3	R1	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
3	R2	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
3	R3	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
3	R4	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
3	R5	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
3	R13	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
3	R14	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
3	R15	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
3	R6	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
3	R9	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
3	CD3	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
3	CD4	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
3	C21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C39	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C51	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C57	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
3	C27	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
3	C33	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
3	C37	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
3	C16	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
3	C1	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C13	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C17	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C18	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C2	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C24	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C25	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C26	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C5	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C7	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C8	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C9	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
3	C20	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
3	C6	2203-000659	C-CERAMIC,CHIP;0.27nF,5%,50V,NP0,TP,1608	
3	C23	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
3	C3	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
3	C11	2203-001052	C-CERAMIC,CHIP;0.56nF,10%,50V,X7R,TP,160	
3	C14	2203-001052	C-CERAMIC,CHIP;0.56nF,10%,50V,X7R,TP,160	
3	C19	2203-001052	C-CERAMIC,CHIP;0.56nF,10%,50V,X7R,TP,160	
3	C4	2203-001052	C-CERAMIC,CHIP;0.56nF,10%,50V,X7R,TP,160	
3	C22	2203-001256	C-CERAMIC,CHIP;0.008nF,0.25pF,50V,NP0,TP	
3	C38	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
3	C28	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
3	C32	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
3	C34	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
3	C36	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
3	CE1	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	CE2	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	CE4	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	CE5	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	CE3	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
3	L2	2702-001092	INDUCTOR-RADIAL;2.2uH,10%,6x4mm	
3	X2	2801-003432	CRYSTAL-UNIT;20.25MHZ,30PPM,28-AAM,13PF,	
3	L3	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
3	L4	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
3	CN64	3711-004778	CONNECTOR-HEADER;NOWALL,64P,2R,2MM,ANGLE	
3	PCB	AA41-00475A	PCB-SIPADOS TOP;CS29A5,FR-4,4L,A,1.6T,18	
⚠ 2	L403	AA27-00090A	COIL LINEARITY;-,3.9uH,DR15x18,11mm,18x4	
2	CN801	3711-004721	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2	CN802	3711-004720	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2		AA95-01553A	ASSY ETC-PCB SVHS BOARD;,ALL WITH SVHS,K	
3	ICS01	1001-001114	IC-VIDEO SWITCH;TEA6425,VIDEO SWITCH ,DI	
3	CNS01	3711-002704	CONNECTOR-HEADER;NOWALL,6P,1R,2.5mm,ANGL	
3	CNS02	3711-002706	CONNECTOR-HEADER;NOWALL,8P,1R,2.5mm,ANGL	
3		HA99-500031	ASSY-PCB,VIDEO-S/W(ACI);50Hz,32W8,KS3A,F	
4	CS01	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
4	CS03	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
4	CS04	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
4	CS05	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
4	CS06	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
4	CS02	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
4	CS07	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
4	JS01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	JS02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	JS03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	JS04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	RS08	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	RS09	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	QS01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QS02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QS03	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	RS01	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS05	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS07	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS10	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS11	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS02	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RS04	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	RS06	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
4	LS01	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
4	PCB	AA41-00153E	PCB-VIDEO SWITCH;CS29A6,FR-1,1L,E,1.6T,2	
4	CS08	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	

Level	Loc. No.	Code No.	Description ; Specification	Remark
4	DZS01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZS02	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	RS12	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RS13	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
3		HA98-600012	ASSY-SUB,PART;PCB-WIDE,S51A,WIDE	
4		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
4		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
4		0204-001024	FLUX;DF-98TVS,-,20%,-	
4		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2	CN701A	AA39-00306A	LEAD CONNECTOR-ASSY;KS3A,UL2547#26,UL/CS	
2	LH01	AA26-90002C	TRANS-DUMMY;-,-,-,-,-,-,-,-,-,-,-,EER2	
2	LH02	AA27-40003L	COIL HORIZ. WIDTH;-,1.0mH,DR14x20,2UEW0.	
2	C420	2306-000188	C-FILM,MPPF;330nF,5%,400V,TP,26x19.5x11,	
2		AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
2	BOT	AA39-20536G	LEAD CONNECTOR ASSY;,1P,F,F,60MM,1617#22	
2	TOP	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	

ASSY-CRT

1		HA94-01800A	ASSY-CRT;W76EGX023X522,+360MG,32,ITC,T	
⚠ 2		AA03-00122A	CRT COLOR;W76EGX023X522,+380mG,0.285mH,1	
2		AA39-20518A	LEAD CONNECTOR-ASSY;,6(4)P,350MM,YFH806-	
2		AA27-00019A	COIL DEGAUSSING;-,32,14.5ohm,65T,L3800,	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-00031A	ASSY TBC WIRE(P);DP,32inch,AA98-70013C,3	

ASSY PCB MISC-CONTROL

1		AA94-12332A	ASSY PCB MISC-CONTROL;28V6,KS3A,PAL	
2		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
2		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2		0204-001024	FLUX;DF-98TVS,-,20%,-	
2	LDY01	0601-000198	LED;ROUND,RED/GRN,5.0mm,630/565nm	
⚠ 2	PD811S	3711-004696	CONNECTOR-HEADER;NOWALL,3P,1R,5MM,ANGLE,	
⚠ 2	PD812S	3711-004697	CONNECTOR-HEADER;NOWALL,3P,1R,5MM,ANGLE,	
2	Bracke	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	
2	Bracke	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
2	RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
2	CNY02	AA39-20005B	LEAD CONNECTOR-ASSY;,3P,300MM,YBNH025-03	
2	CNY01	AA39-20069A	LEAD CONNECTOR-ASSY;,5P,500,YBNH025-05,6	
2	CN811	AA39-20179A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YFH800-	
2		AA61-00530B	BRACKET-MASTER;25M6,29M6,SECC	
2		AA97-13500A	ASSY AUTO-CONTROL;32V6,KS3A,PAL(SEH)	
3	DY02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	DY01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
3	DZY01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
3	DZY02	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
3	RY03	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RY05	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RY01	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
3	RY02	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RY04	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
3	LY01	2701-000136	INDUCTOR-AXIAL;18uH,10%,2.5x3.4mm	
3	PCB	AA41-00799A	PCB-CONTROL;28V6/32V6,CEM-1,1L,A,1.6T,24	
3	EL01	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	EL02	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	EL03	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	EL04	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
3	SWY02	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY03	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY04	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY05	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	SWY06	3404-000282	SWITCH-TACT;12Vdc,50mA,120gf,6x6x5mm,SPS	
3	CY01	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	

ASSY PCB CRT

1		AA95-01538A	ASSY PCB CRT;,KS3A,32,W6-W7,100HZ	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2	CN501A	3711-002641	CONNECTOR-HEADER;BOX,10P,1R,2.54mm,STRAI	
2	CN501A	AA39-00225A	LEAD CONNECTOR-ASSY;,10P,600MM,67096-010	
2	CN502A	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
2	CN502E	AA39-20029K	LEAD CONNECTOR-ASSY;,7P,400,67096-007,S,	
2	CNF01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
2	CNG01	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
2	IC501	HA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
2	IC502	HA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
2	IC503	HA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	
3		1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
3		6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	
3		6021-000154	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C	
3		AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-,-	
2	ICG01	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
2	QG03	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
2	VA999	3704-001111	SOCKET-CRT;8P,15.24PI,35.5PI,NI,-	
2		HA68-02176A	LABEL;LABEL	
2	C502	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C505	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C508	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	CF07	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
2	C503	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C506	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C509	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
2	C511	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	C512	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C515	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C526	2401-000914	C-AL;22uF,20%,16V,GP,TP,5x11,5	
2	C514	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C518	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C519	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C520	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C521	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C522	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C523	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	CF01	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
2	CF02	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	C516	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
2	CF03	2201-000376	C-CERAMIC,DISC;0.22NF,5%,50V,SL,TP,6.3X3	
2	CF04	2201-000653	C-CERAMIC,DISC;0.068NF,5%,50V,SL,TP,5X3M	
2	CF05	2301-000261	C-FILM,PEF;4.7nF,5%,100V,TP,10.5x12.5x6.	
2	CF06	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
2	CF08	2201-000604	C-CERAMIC,DISC;0.056NF,+100-0%,500V,SL,T	
2	CF10	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	CF12	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	CF14	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
2	CG01	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
2	CG04	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
2	CG02	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
2	CG03	2401-000493	C-AL;10uF,20%,50V,LZ,TP,5x11mm,5mm	
2	D502	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D507	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D508	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D509	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D510	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D511	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D512	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF02	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF03	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	DF01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DF04	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DG01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	DZ503	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
2	KEZI	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
2	DZF01	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
2	DZF02	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
2	EL83	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL84	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL85	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL86	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL87	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL88	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL89	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL91	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL92	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	EL93	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL94	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT504	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT505	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT507	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT508	AA60-40014A	PIN-GT,ASSY;AUTO	
2	J501	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J503	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J505	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J506	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J507	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J508	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J509	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J510	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J511	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JG01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J512	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J513	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J514	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J515	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J516	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J517	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J518	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J519	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J520	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J524	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J526	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J527	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J528	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF06	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JF07	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J529	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J530	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J531	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R504	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R509	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	R539	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	J522	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	LF02	2701-000112	INDUCTOR-AXIAL;100uH,10%,3x7mm	
2	LF01	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L505	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L506	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	LF03	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	PCB	AA41-00210D	PCB-CRT;CS29A6,FR-1,1L,D,1.6T,330x245,KS	
2	Q502	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	QG01	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q503	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	QF01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	QF02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	QF03	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	RF10	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF11	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R505	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R510	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
2	R517	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF18	2003-000458	R-METAL OXIDE(S);100ohm,5%,2W,AF,TP,4x12	
2	R519	2002-001009	R-COMPOSITION;2.7Kohm,10%,1/2W,AA,TP,3.7	
2	R501	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF02	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF03	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R522	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF05	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF06	2001-000989	R-CARBON;820KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF07	2004-001989	R-METAL;620ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	RF08	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	RF09	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF12	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	RF13	2001-001179	R-CARBON(S);68KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF16	2001-001179	R-CARBON(S);68KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF14	2001-001071	R-CARBON(S);12KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF15	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF17	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RG06	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RG07	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RF19	2003-001023	R-METAL OXIDE(S);120ohm,5%,2W,AF,TP,3.9x	
2	RF20	2003-002214	R-METAL OXIDE(S);680ohm,5%,2W,AG,TP,3.9x	
2	RF21	2003-002214	R-METAL OXIDE(S);680ohm,5%,2W,AG,TP,3.9x	
2	RF22	2003-002214	R-METAL OXIDE(S);680ohm,5%,2W,AG,TP,3.9x	
2	RF23	2003-000746	R-METAL OXIDE(S);56ohm,5%,2W,AF,TP,4x12m	
2	RF24	2003-000746	R-METAL OXIDE(S);56ohm,5%,2W,AF,TP,4x12m	
2	RF25	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
2	RG01	2004-004015	R-METAL(S);9.1Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	RG02	2004-002022	R-METAL(S);51Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	RG04	2004-002022	R-METAL(S);51Kohm,1%,1/2W,AA,TP,2.4x6.4m	
2	RG03	2001-001121	R-CARBON(S);3.6KOHM,5%,1/2W,AA,TP,2.4X6.	
2	RG05	2001-001163	R-CARBON(S);560OHM,5%,1/2W,AA,TP,2.4X6.4	
2	RG08	2001-001163	R-CARBON(S);560OHM,5%,1/2W,AA,TP,2.4X6.4	
2	L503	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L504	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	LF04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	LF05	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	R502	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R507	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R512	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R503	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R508	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R513	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R526	2004-000500	R-METAL;2.7Kohm,1%,1/8W,AA,TP,1.8x3.2m	
2	R527	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
2	R518	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R542	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R543	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R544	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R546	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	L501	2701-000178	INDUCTOR-AXIAL;33uH,10%,3x7mm	
2	R521	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	DZG501	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	L507	2701-000215	INDUCTOR-AXIAL;8.2uH,10%,2.5x3.4mm	
2	SG501	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG503	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG504	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	SG505	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
2	R548	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	C527	2301-000188	C-FILM,PEF;1nF,5%,100V,TP,10.5x12.5x6.5,	
2		HA98-00054A	ASSY SUB PART;ASSY SUB PART;KS3A,PCB,CRT	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-000442	SOLVENT;1M-1000,C3H7OH,96,-	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
2	QF04	HA96-50149A	ASSY-H/S;-,AA62-30013A,2SC2344,-	
3		0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
3	SCR09	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S09	AA62-30013A	HEAT SINK-ES;-,A6063 EXTR,-,-,45(21) T02	
2	QF05	HA96-50149B	ASSY-H/S;-,TR,AA62-30013A,2SA1011,-	
3	QV10	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
3	SCR10	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S10	AA62-30013A	HEAT SINK-ES;-,A6063 EXTR,-,-,45(21) T02	
2	C510	2401-001525	C-AL;47uF,20%,250V,GP,BK,16x25mm,7.	
2	R523	2008-000267	R-FUSIBLE(S);2.4ohm,5%,2W,AA,TP,3.9x10mm	
2	CF11	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	JA501	3722-001503	JACK-PIN;1P,1PI,NI,RED,SCR-JACK	
2	CNF01	AA39-20033C	LEAD CONNECTOR-ASSY,;3(2)P,200,67096-003	
2	QG02	0502-000244	TR-POWER;KSA940,PNP,1.5W,TO-220,-,40-14	
2	C513	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
2	C532	2306-000188	C-FILM,MPPF;330nF,5%,400V,TP,26x19.5x11,	
2	GT506	AA39-20010D	LEAD CONNECTOR-ASSY,;1P,400,YFH800-01,S,	

Level	Loc. No.	Code No.	Description ; Specification	Remark

ASSY ETC-PCB A/V BOARD

1		AA95-01513A	ASSY ETC-PCB A/V BOARD;,29K8,KS3A,100HZ	
2	JH701	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
2	JA701	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
2	JS701	3722-001163	JACK-VHS;4P,12mm,AU,BLK,N	
2	CN704	AA39-00070A	LEAD CONNECTOR-ASSY;,4P,200MM,YBNH250-04	
2	CN705	AA39-20009E	LEAD CONNECTOR-ASSY;,1P,600,YFH800-01,16	
2	CN701	AA39-20068G	LEAD CONNECTOR-ASSY;,8P,700MM,YBNH025-08	
2	CN703	AA39-20069A	LEAD CONNECTOR-ASSY;,5P,500,YBNH025-05,6	
2	CN702	AA39-20070J	LEAD CONNECTOR-ASSY;,7P,700MM,YBNH250-07	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-00246A	ASSY SUB PART;S51A,CONTROL WIDE	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2	R701	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
2	R702	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
2	C701	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C702	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C707	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C708	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C703	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C704	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
2	C705	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
2	C706	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
2	L701	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L702	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L703	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L704	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	KEZI	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L705	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L706	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L707	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L708	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	PCB	AA41-00345A	PCB-SIDE A/V;CS29K1,FR-1,1L,A,1.6T,245x2	

ASSYPCB-PFC

1		HA94-05783B	ASSYPCB-PFC;32W8/Z4,50HZ,5783A	
2	EYP07	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP08	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP09	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP10	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP11	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP12	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP13	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP14	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP15	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP16	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP17	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP18	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP19	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP20	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP21	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP22	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP23	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP24	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP25	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP26	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP01	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP02	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP03	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP04	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP05	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EYP06	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	PCB	AA41-00404A	PCB-PFC;CS2539,FR-1,1L,A,1.6T,330x245,KS	
2	CNP02	AA39-00236A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YHL500-	
2	CNP01	AA39-00235A	LEAD CONNECTOR-ASSY;,3(2)P,300MM,YHL500-	
2	PFT01	AA27-00121A	COIL CHOKE;CODE_NO,SP43J5HP,15mH,-0%,+5%	
2	PFT02	AA27-00121A	COIL CHOKE;CODE_NO,SP43J5HP,15mH,-0%,+5%	

Level	Loc. No.	Code No.	Description ; Specification	Remark

2		HA98-600020	ASSY-SUB,PART;KS4A,PFC PCB	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001024	FLUX;DF-98TVS,-,20%,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2		HA61-00987A	HOLDER-PFC;32W8,29A8,28W8,HIPS,ALLFLAT	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2	CNP02	3711-004721	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2	CNP01	3711-004720	CONNECTOR-HEADER;3WALL,2P,1R,12.5mm,STRA	
2		6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
⚠ 2	LX803S	AA29-00015A	FILTER LINE NOISE;WS32W8,28-20MH 1.5A,+-	
⚠ 2	CX803S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	

ASSY COVER FRONT

1		AA90-04479B	ASSY COVER FRONT;32V6H,VDS	
2	CB+SCR	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CF+PCB	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
2	CRT+CF	AA60-10050V	SCREW-ASSY;-,SWRCH18A,M6,L30,HH,+,WC,-,Z	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	rating	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
2		AA96-01297B	ASSY COVER P-FRONT;32V6H,VDS,HIPS HB,SIL	
3	CF+KC	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	CF+SPK	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	CF+WR	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3		AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	
3		AA64-03142A	KNOB-CONTROL;28V6 SEH,ABS,HB,G3676,SVM30	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		AA64-03144A	WINDOW-RMC,LED;28V6 SEH,PC,CLR	
4		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
3		AA64-70117B	BADGE-BRAND;-,AL,-,-,L65,R2000,SILVER,SS	
3	POWER	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
3		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
3		AA64-03141B	CABINET-FRONT;32V6H,VDS,SEH,HIPS,HB,G430	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		AA64-03143A	KNOB-POWER;28V6 SEH,ABS,HB,G3676,SVM3012	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA61-00711C	HOLDER-PCB;29K8,HIPS,HB,GRY	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	
3		AA39-00102A	LEAD CONNECTOR-ASSY;,4P,900,700MM,35155-	
3		3001-001005	SPEAKER;10W,8OHM,91DB,140HZ	
3		AA64-01506D	INLAY-AV;29K3,PVC-SHEET,T0.3,-,-,P/GRAY,	
3		AA64-03145A	DECORATION-POWER;28V6 SEH,ABS,HB,G3676,S	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	CF+CB	6003-001025	SCREW-TAPTITE;RH,+,B,M4,L20,ZPC(BLK),SWR	

ASSY COVER REAR

1		AA90-04481A	ASSY COVER REAR;32V6,SEH	
2		HA64-02529C	CABINET-BACK;32M6,VL-1823,GRY	
3		AA81-00096A	RESIN-A;VL-1823,G5433,A	
3		AA63-60001L	SPACER-FELT;-,FELT,-,-,-,BLK,T0.35,-,150	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	
2		AA64-00894L	INLAY-BACK;21K2,PS SHEET,T0.3,BLK,KS1B 2	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	

ASSY P/MATERIAL

1		AA92-07507A	ASSY P/MATERIAL;32V6	
2		0203-001096	TAPE-CELLULOSE;#301,T0.06,W75,L400,WHT	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		AA69-00744F	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1400,H1	
2		AA69-01895A	CUSHION SET;32V6(SEH),PS FOAMED,C=0.02	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	

ASSY ACCESSORY

1		AA94-05823A	ASSY ACCESSORY;50HZ;D,FLAT,100HZ,KS3A,XE	
2		4301-000121	BATTERY-MN;1.5V,-,AAA,10.5x44.5m,HOLDER	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA68-02124A	LABEL;A/P120(G),70,69,WHITE,XECCO	
2		HA68-00971A	LABEL-BACK,DOLBY;A/P100(G),SILVER-BLACK	
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I	

REMOCON

1		AA59-00116B	REMOCON;-,TM57,37,D3/D4,L/GRAY,S/S,GRA	

ASSY POWER CORD

⚠	1	AA96-01127B	ASSY POWER CORD;DP,AA39-10001M,CP2,H/C40	
2		AA39-10001M	CBF POWER CORD;-,KJP-140,KLCE-2F,2.4m,HO	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	

ASSY BOX

1		AA92-07500A	ASSY BOX;32V6	
2		AA69-01951A	PACKING CASE;32V6(SEH),D-4 AB,A1,985,665	
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE	
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM	

8. Block Diagrams

8-1 Power Diagram

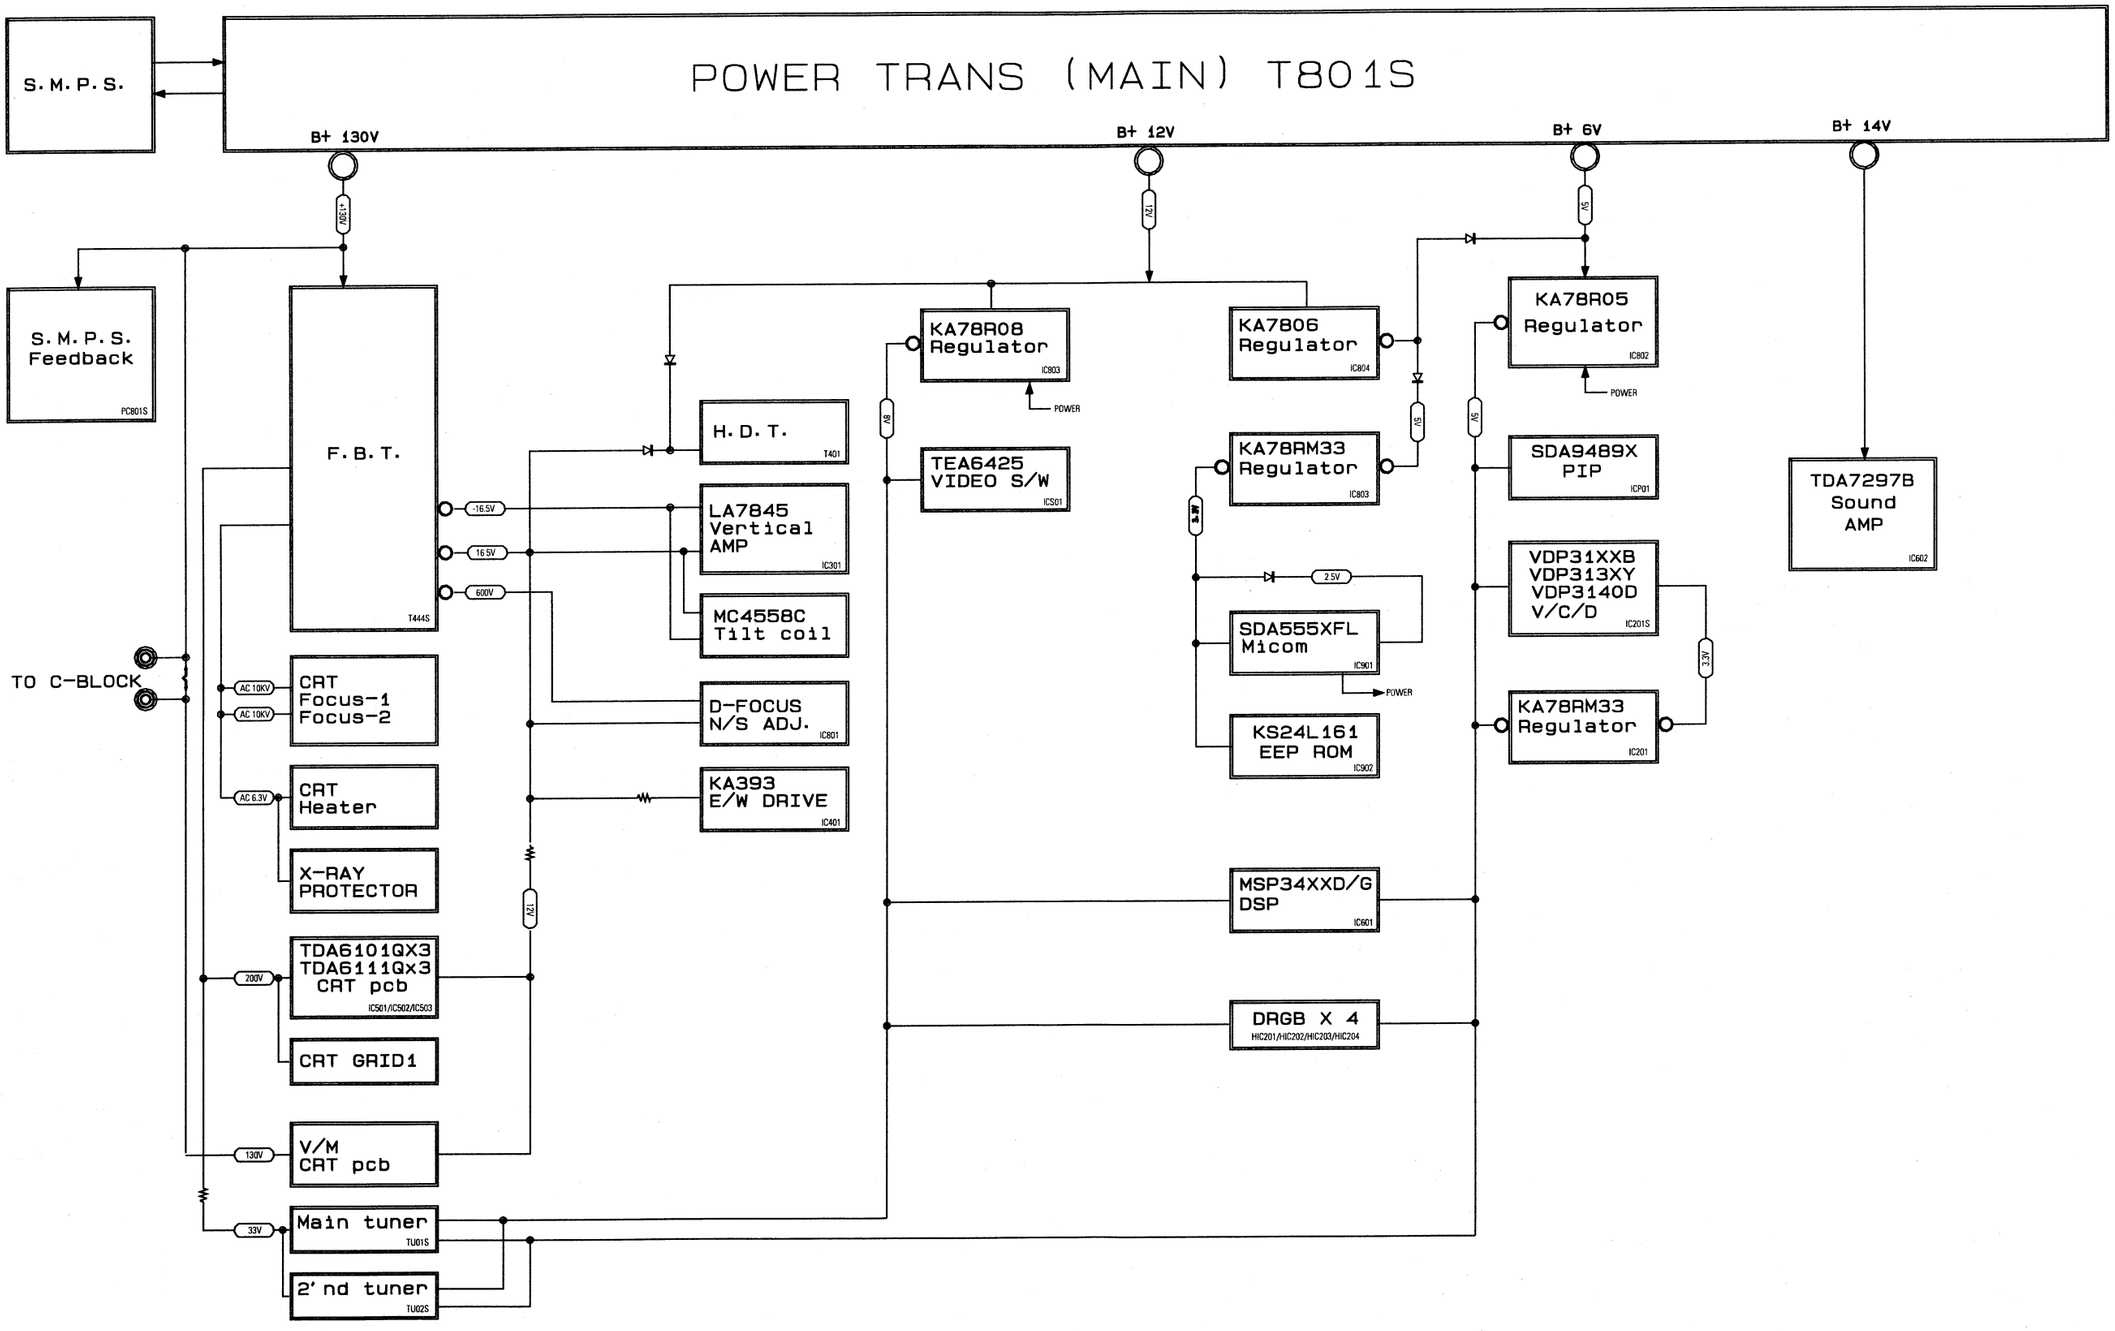

8-2 Block Diagram

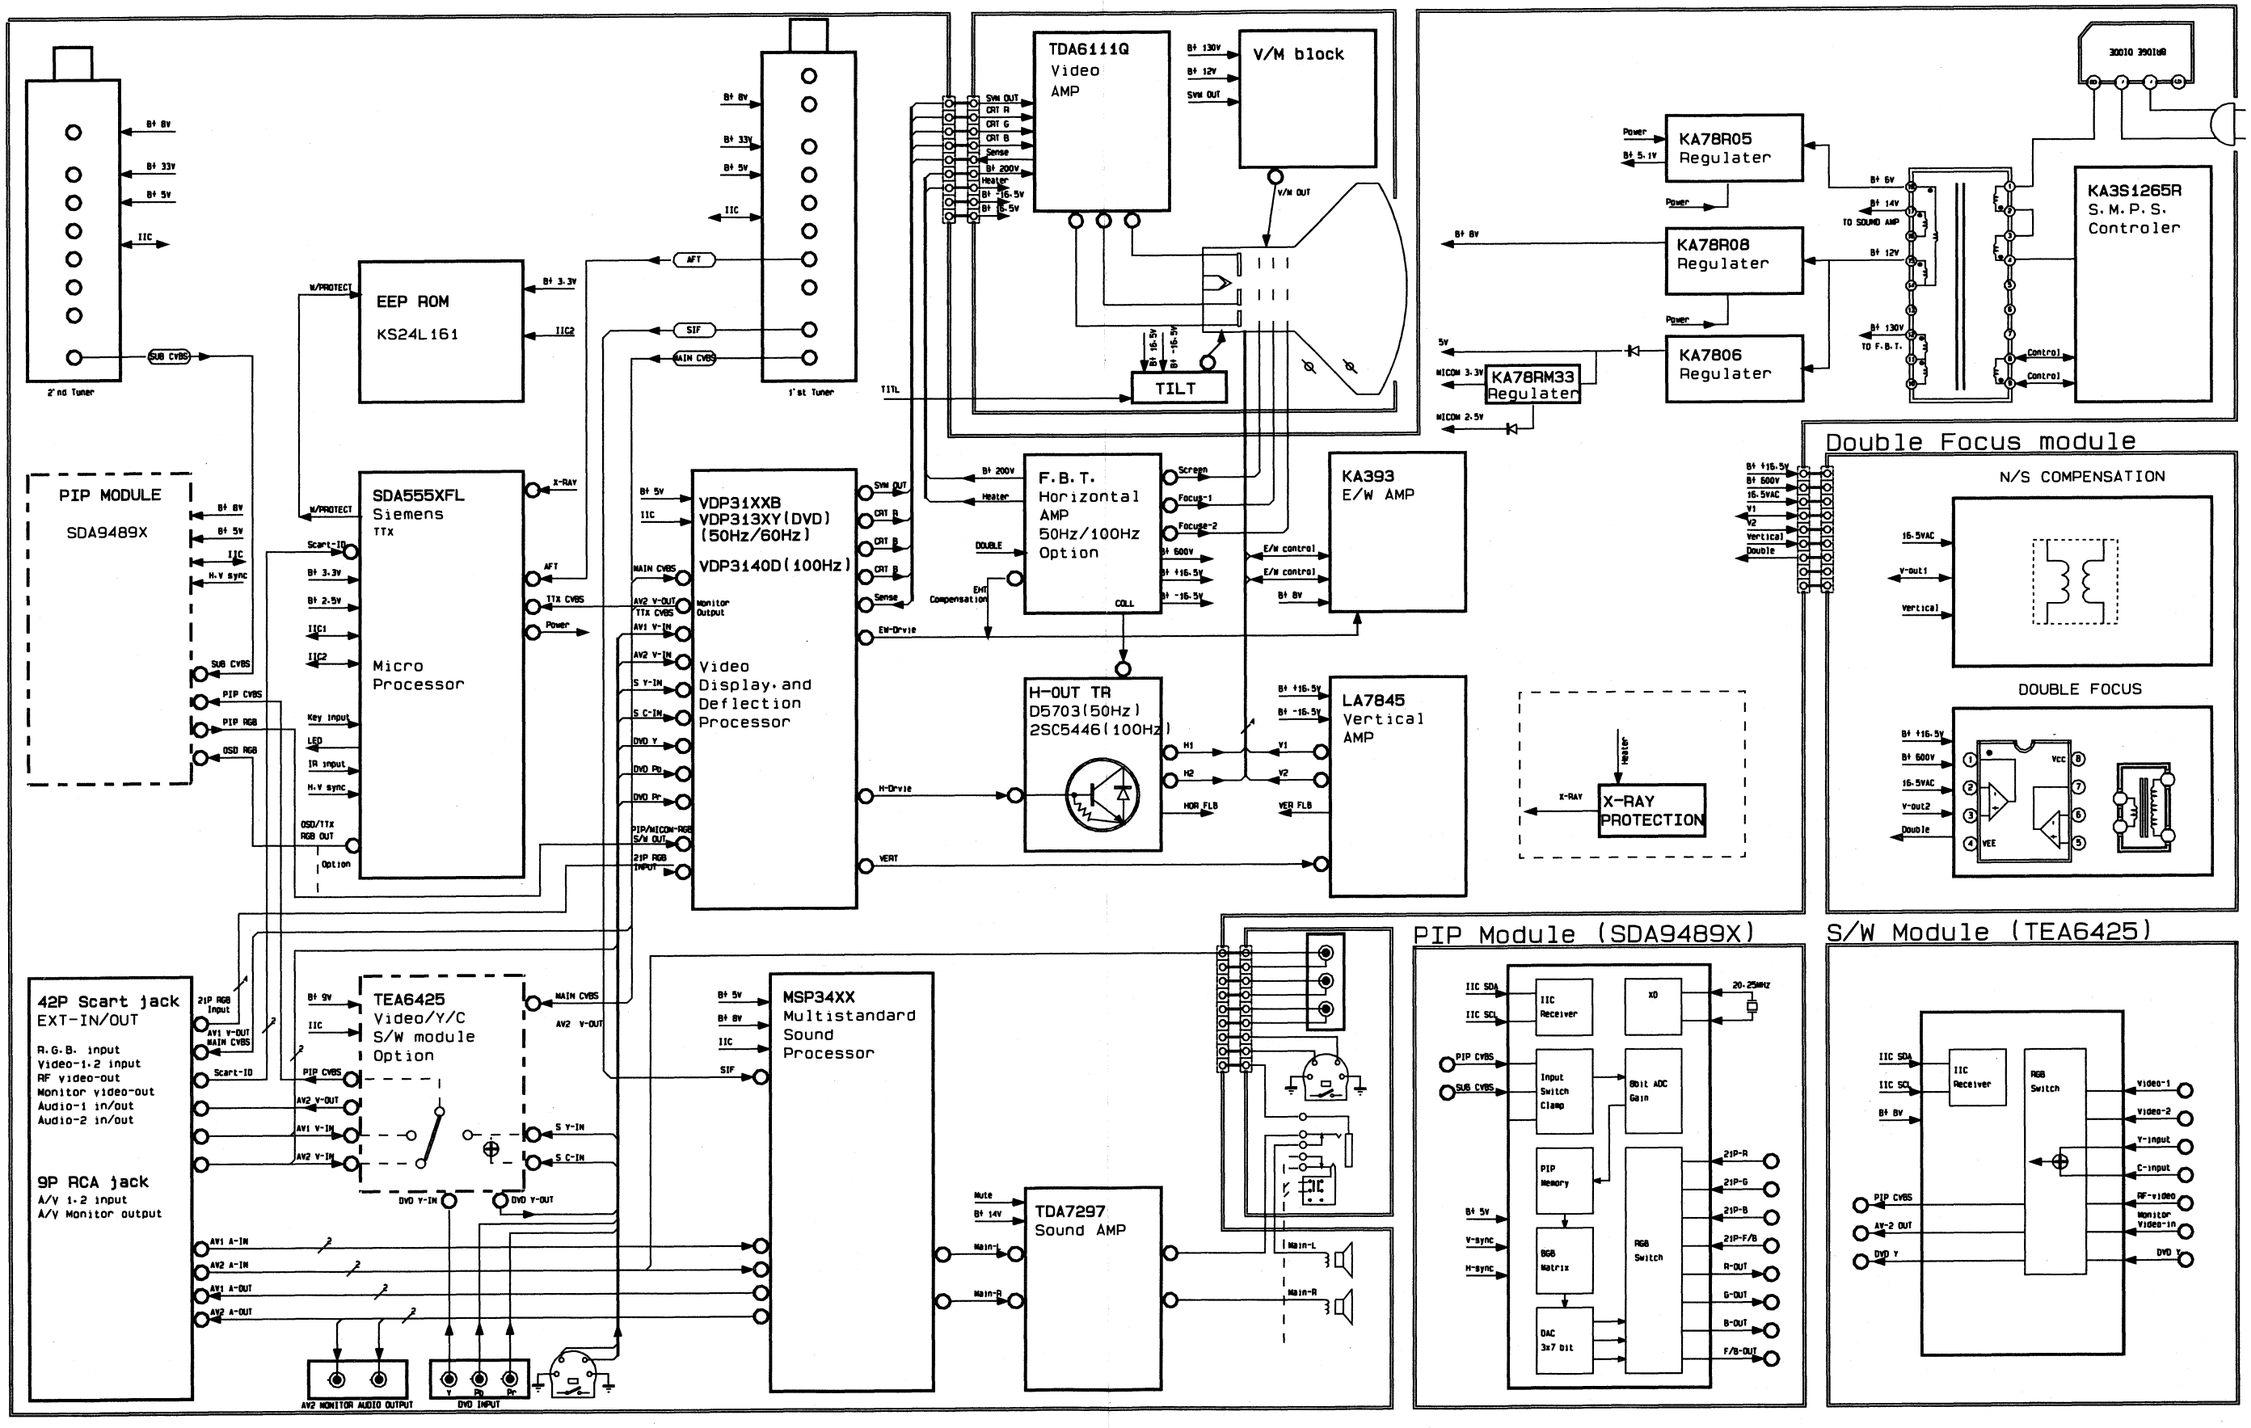

9. Wiring Diagram

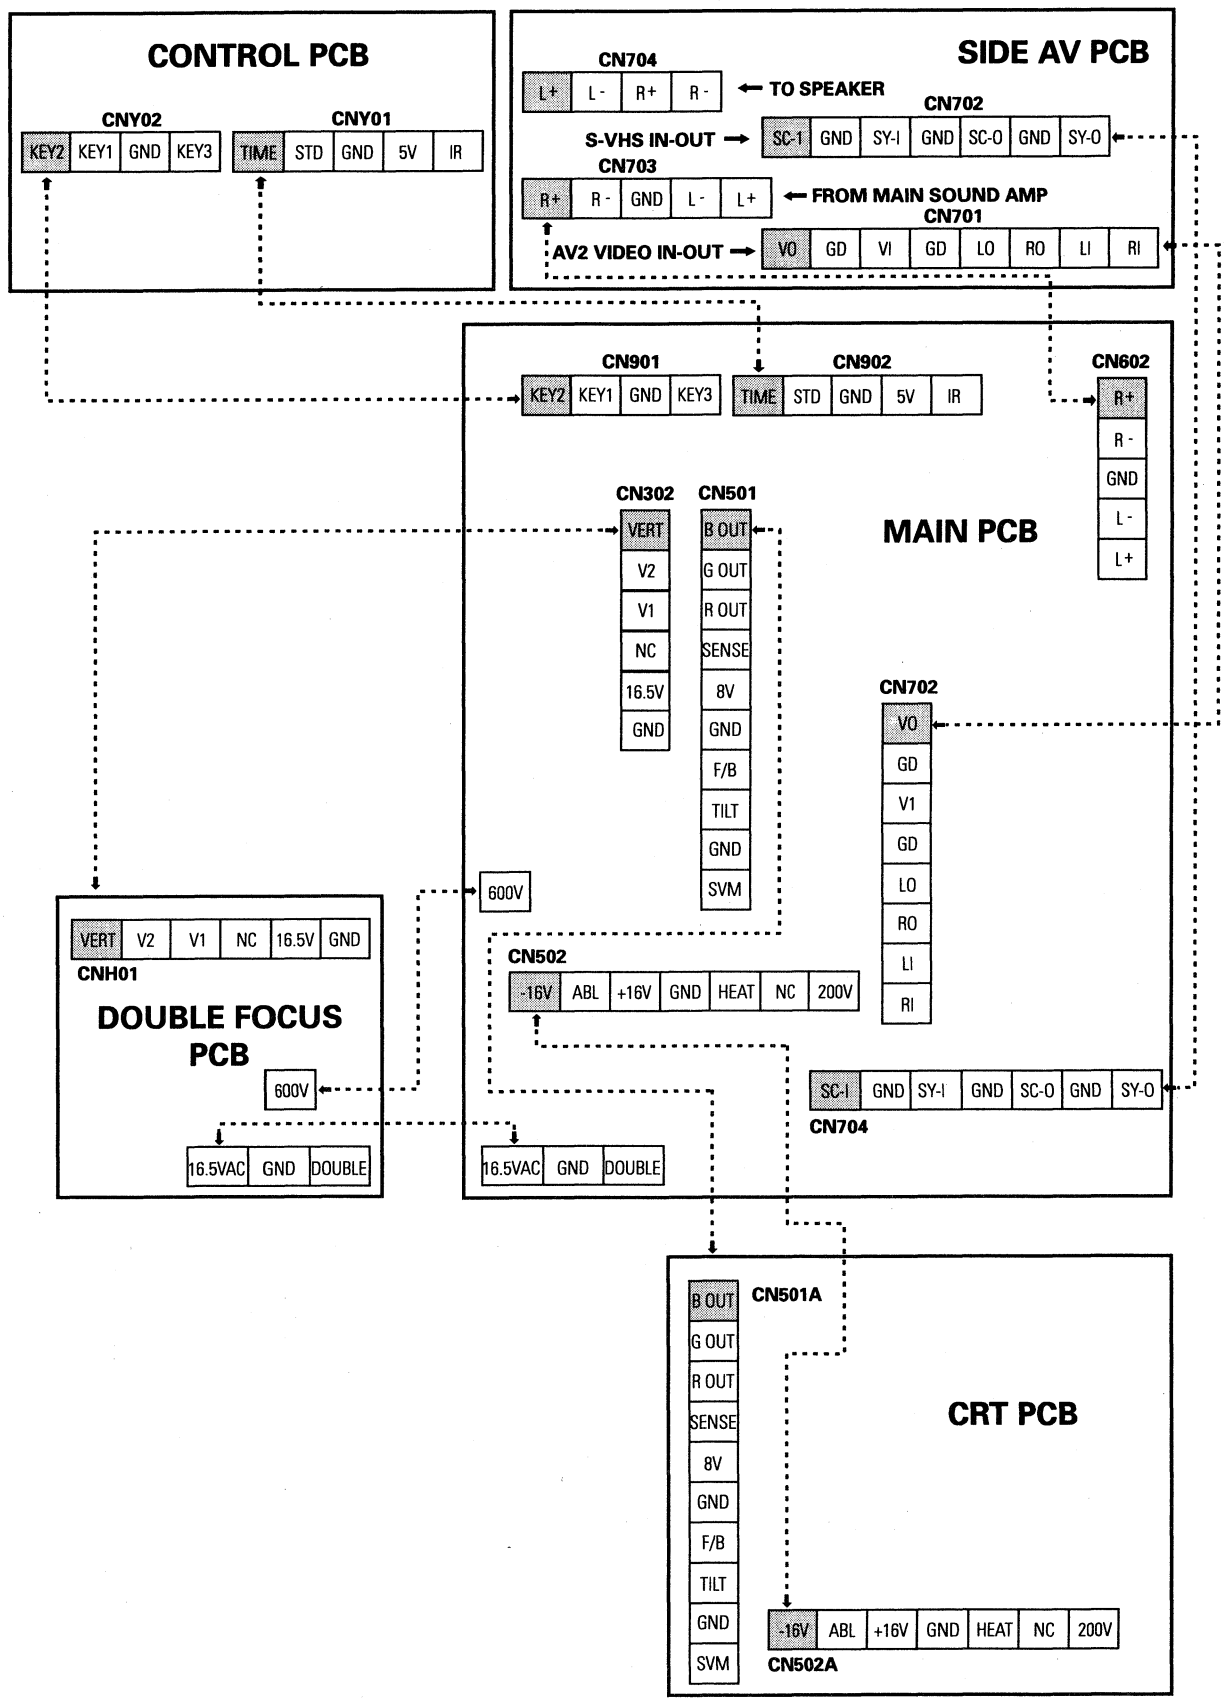

MEMO

10. Schematic Diagrams

10-1 MAIN 1

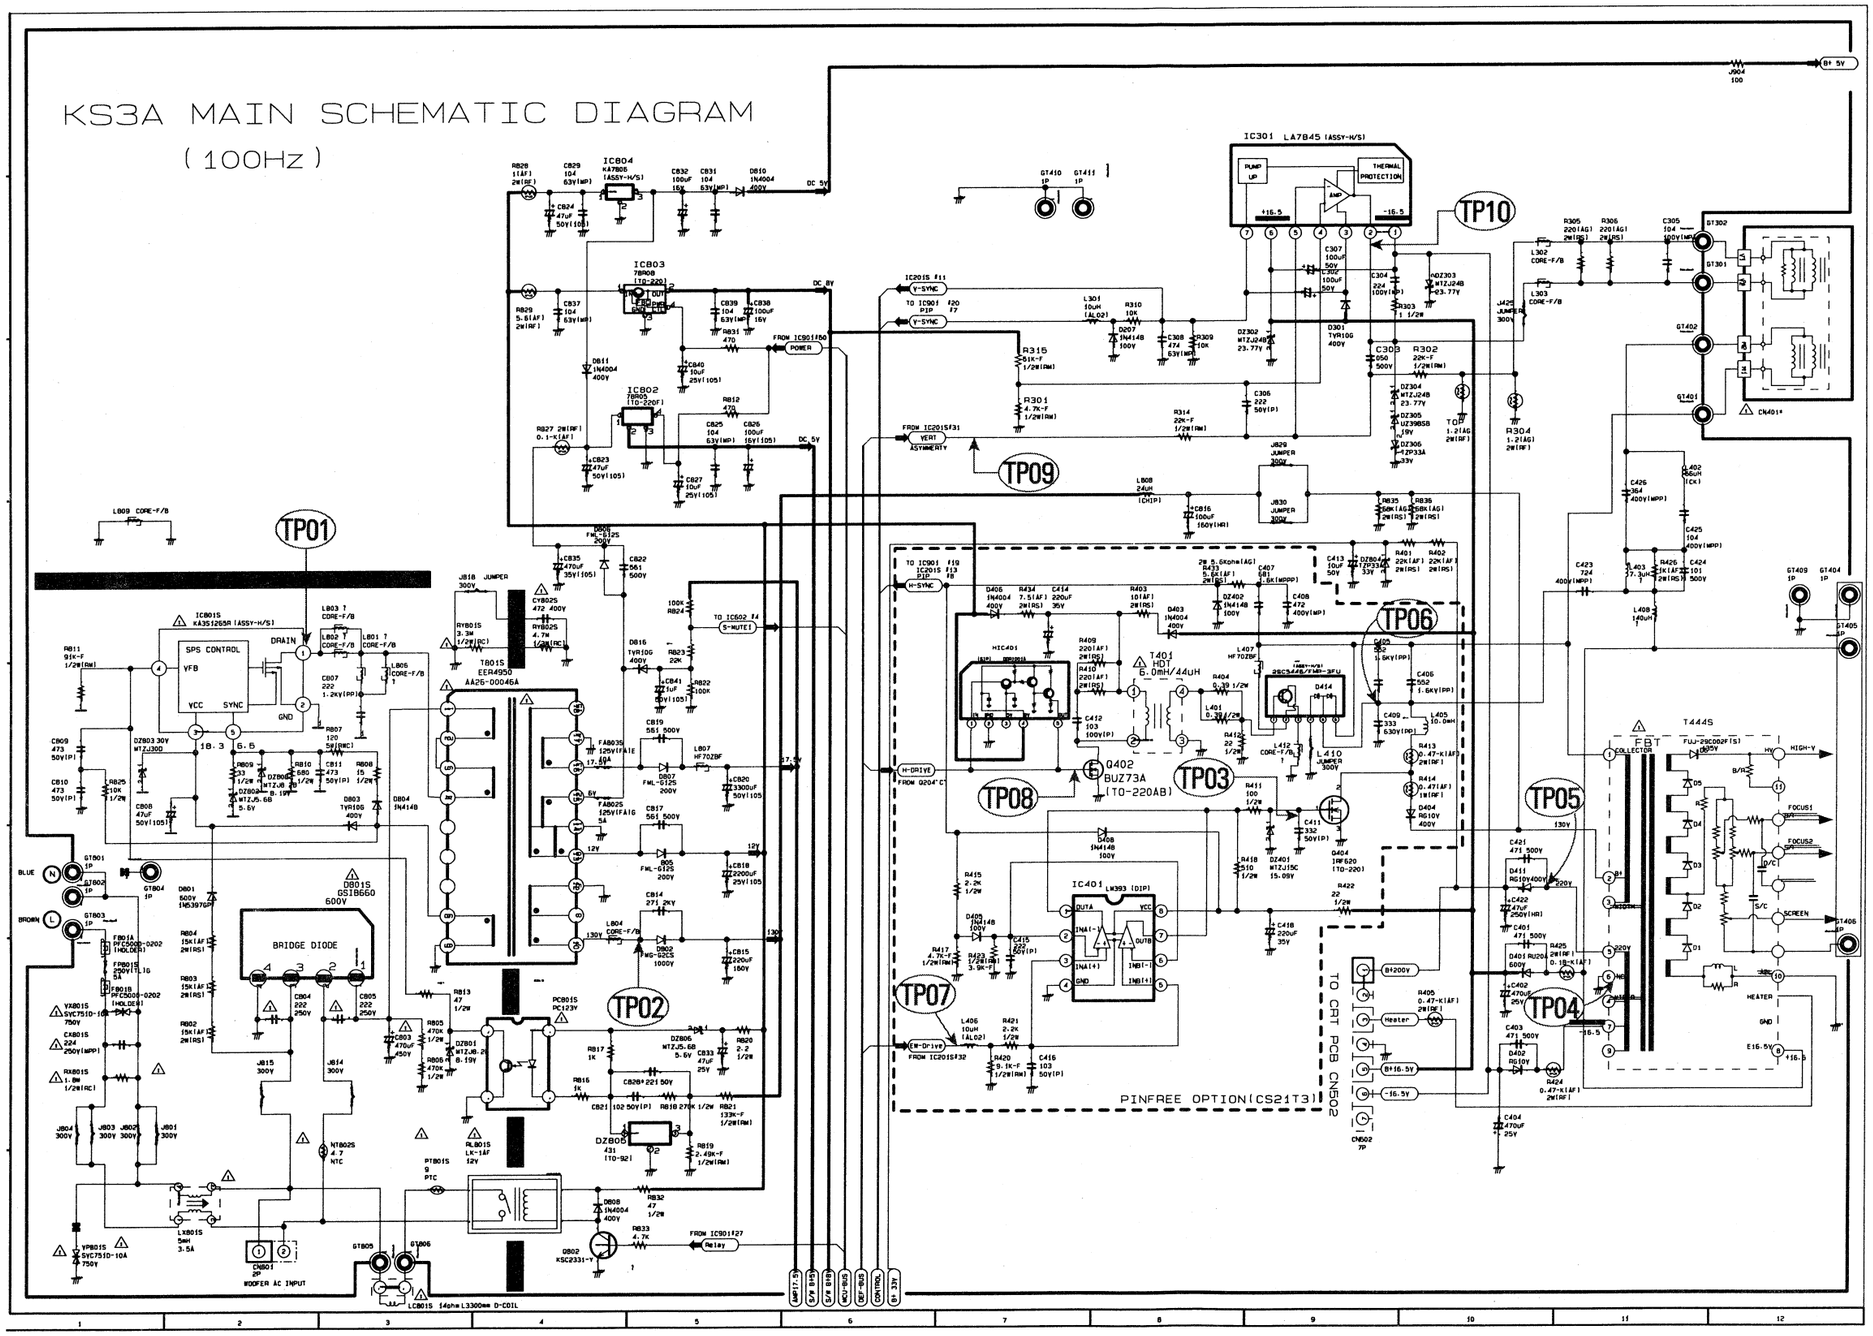

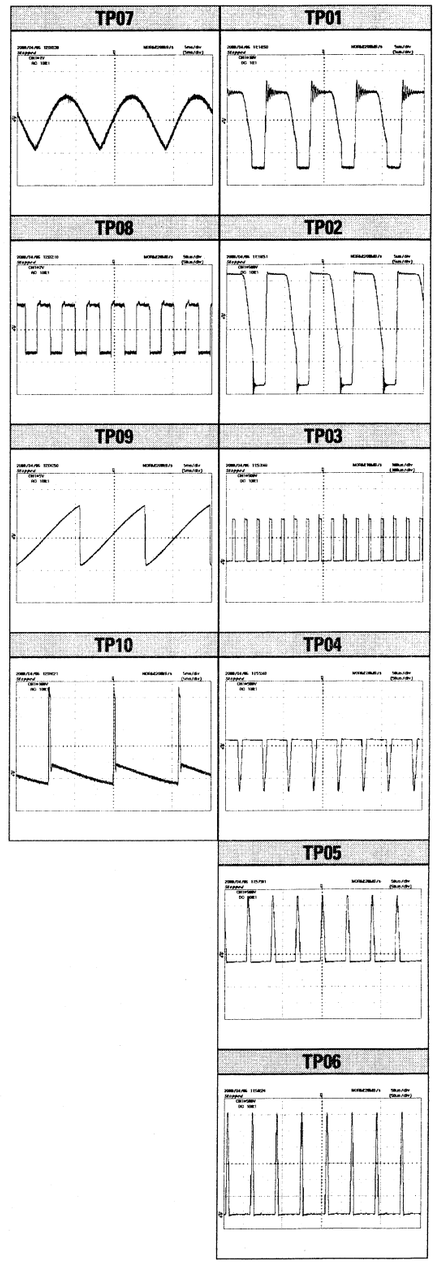

10-2 MAIN 2

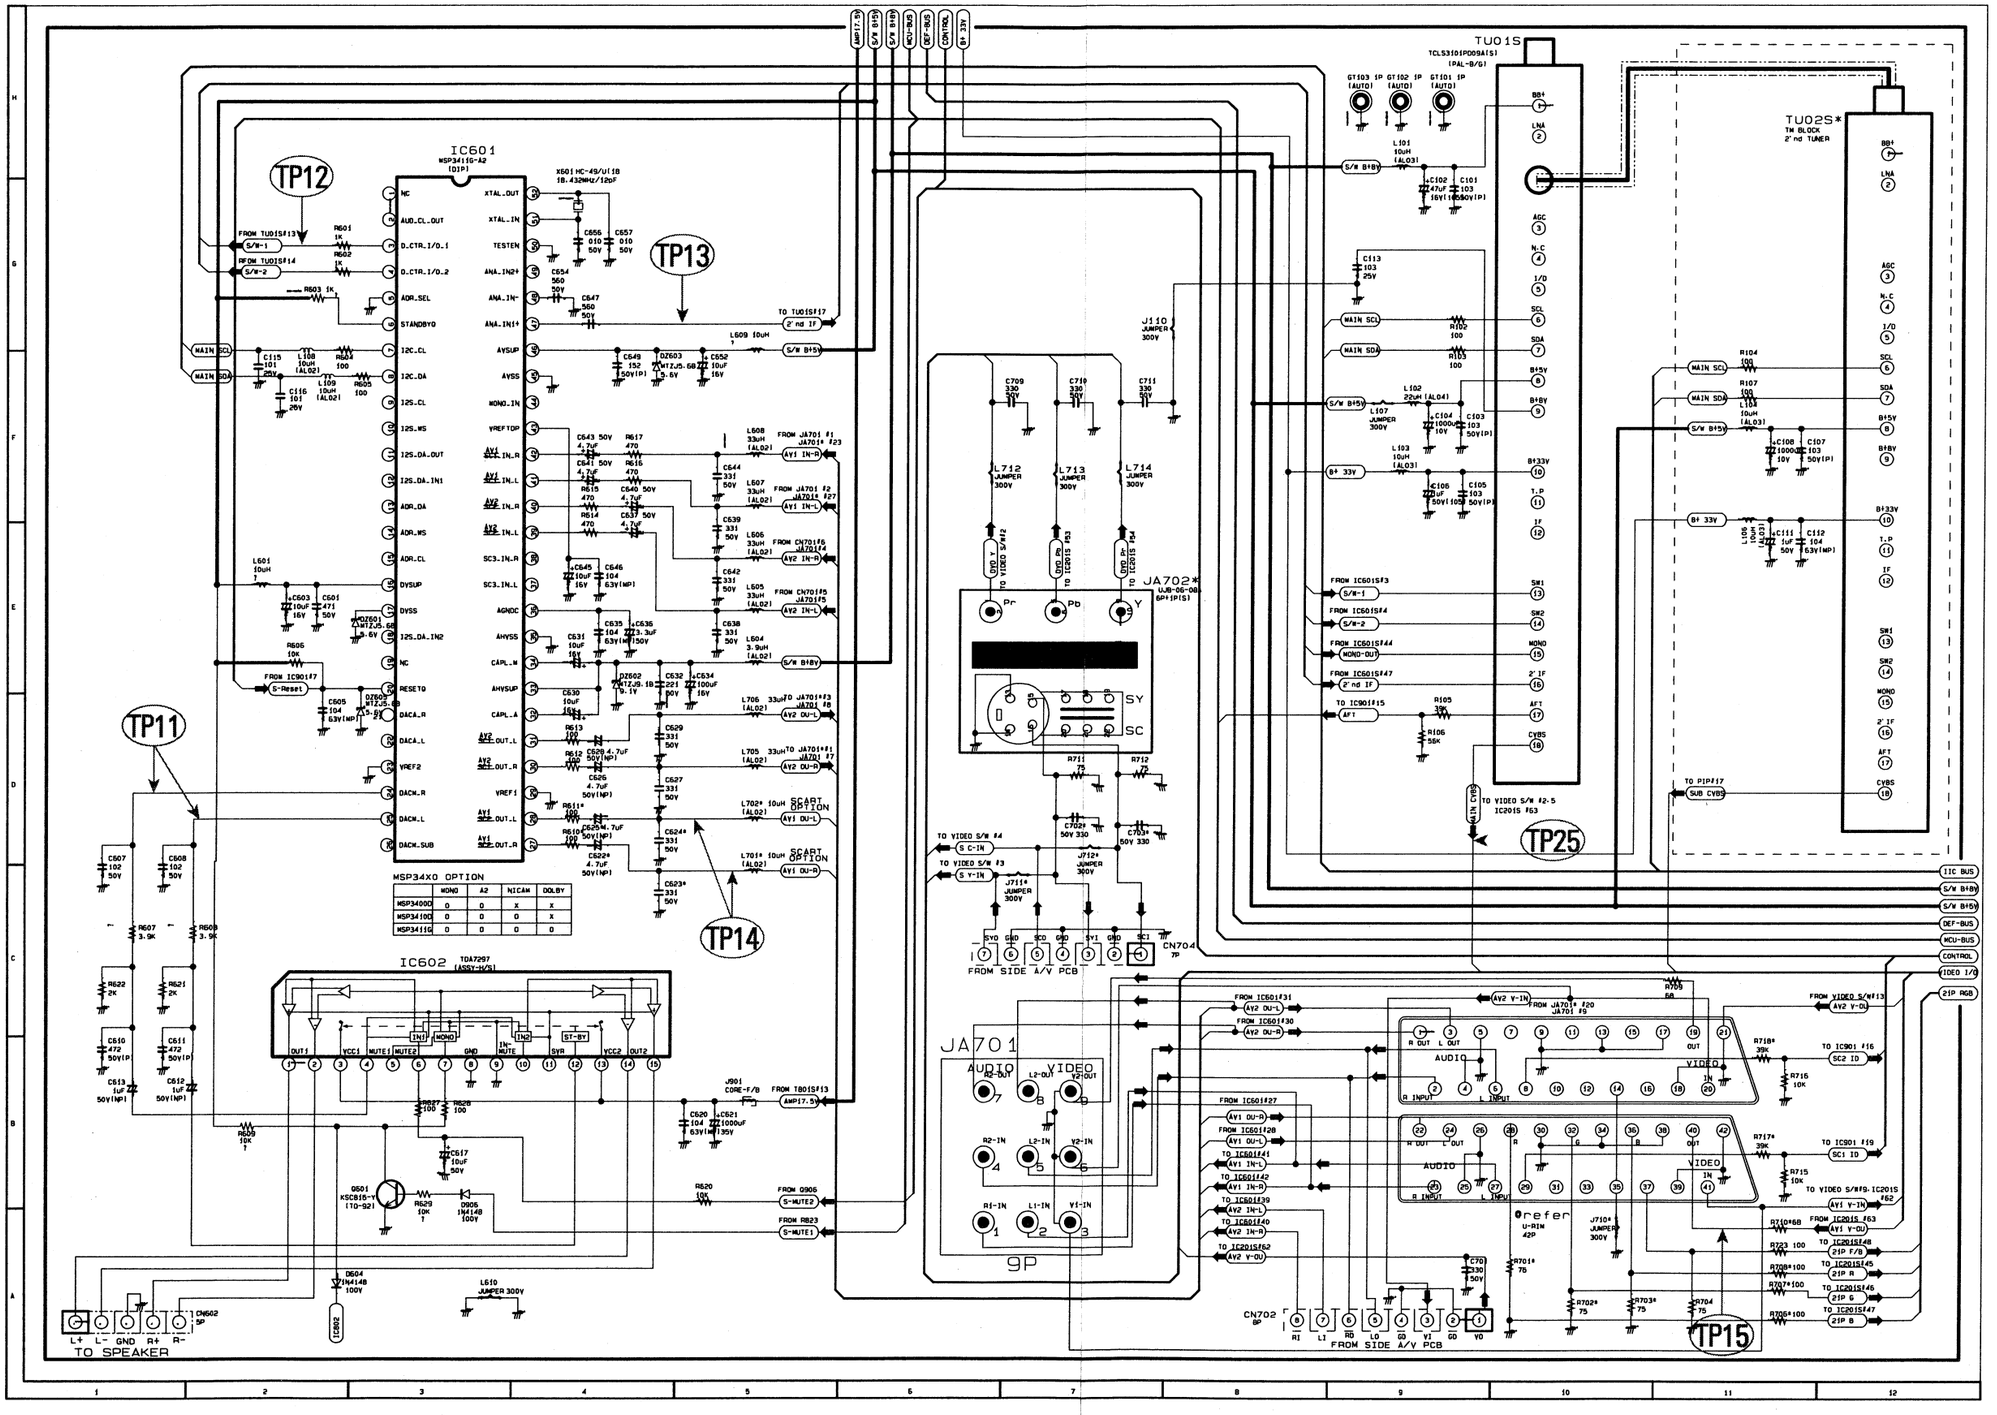
TP11
TP12
TP13
TP14
TP15
TP25
IC601
MSP3411G-A2
IC602
TDA7297
TU01S
TCL5310(PD09AIS)
TU02S*
JA702*
JA701
9P
MSP34X0 OPTION
MSP3400D
MSP3410D
MSP3411G
TO SPEAKER
FROM SIDE A/V PCB
TO PIP#17
TO VIDEO S/W #2-5
IC201S #63

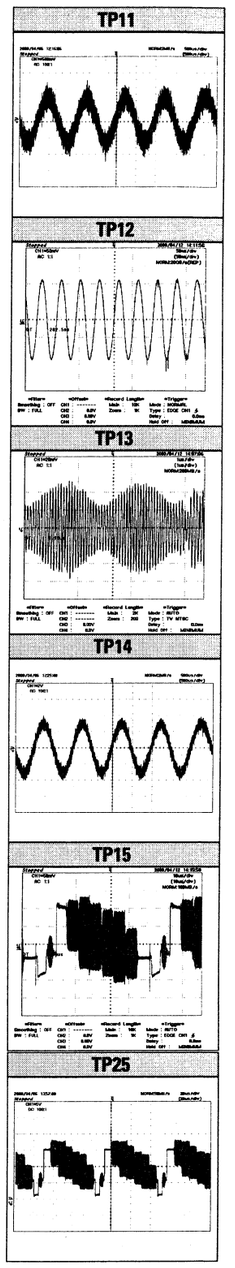
TP11
TP12
TP13
TP14
TP15
TP25

10-3 MAIN3

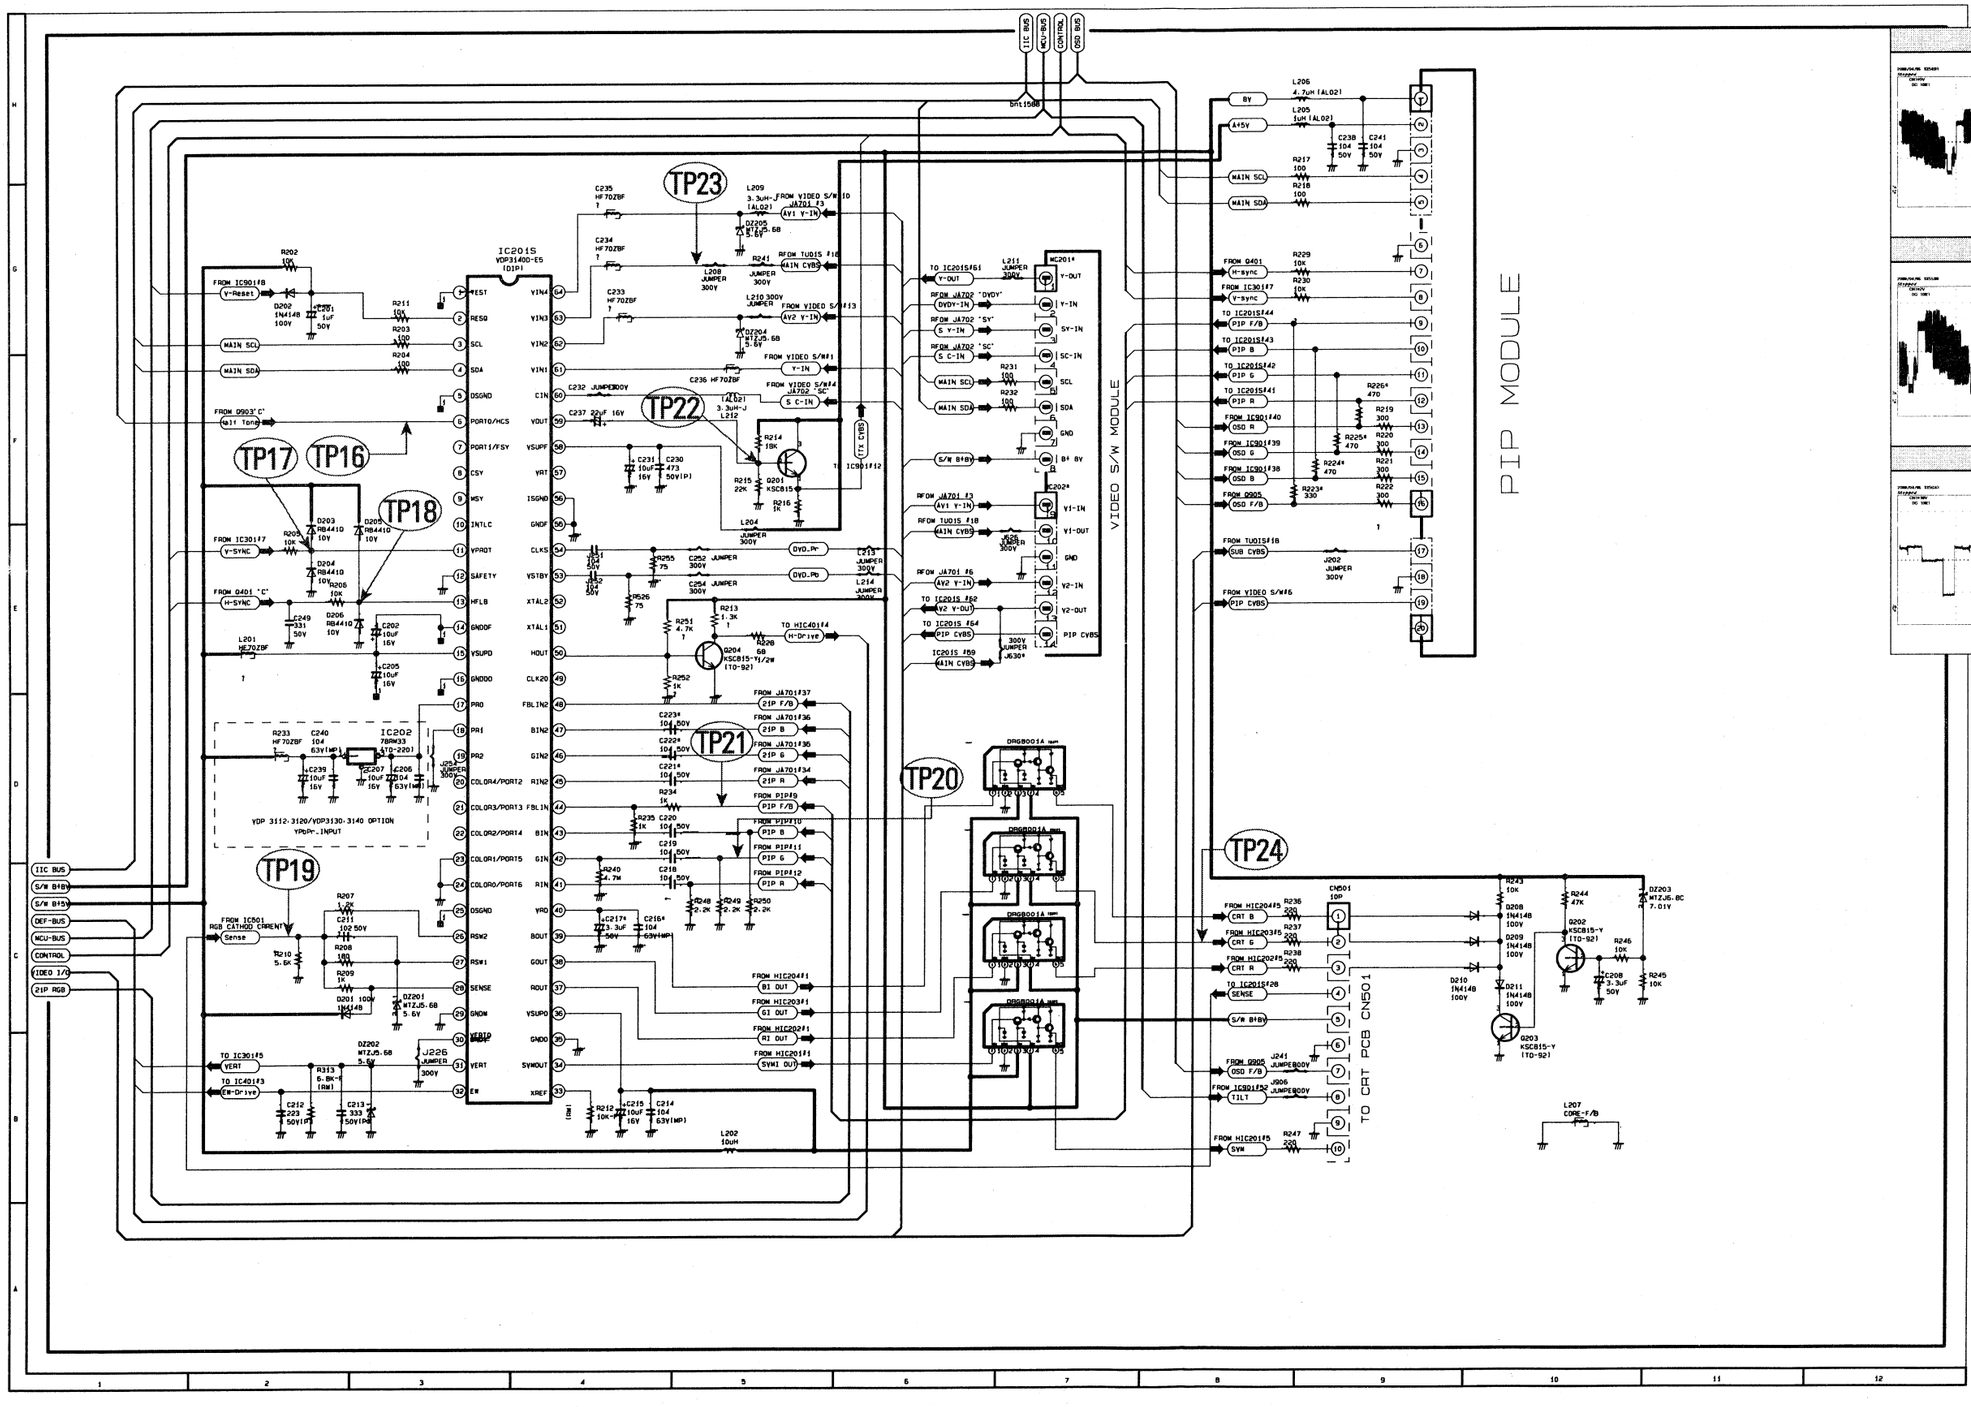
IIC BUS
MCU-BUS
CONTROL
OSD BUS
IC201S
VDP31400-E5
(DIP)
TP23
TP22
TP17
TP16
TP18
TP21
TP20
TP19
TP24
IC202
78RM33
(TO-220)
YDP 3112-3120/YDP3130-3140 OPTION
YPbPr_INPUT
VIDEO S/W MODULE
PIP MODULE
TO CRT PCB CN501
CN501
10P
FROM IC901F8
V-Reset
MAIN SCL
MAIN SDA
FROM D903 'C'
OSD tone
FROM IC301F7
V-SYNC
FROM Q401 'C'
H-SYNC
FROM IC901F8
RGB CATHOD CARENT
Sense
TO IC301F5
VERT
TO IC401F3
EW-Drive
FROM JA701F37
P1P F/B
FROM JA701F36
P1P B
FROM JA701F35
P1P G
FROM JA701F34
P1P R
FROM PIP1F9
P1P F/B
FROM PIP1F10
P1P B
FROM PIP1F11
P1P G
FROM PIP1F12
P1P R
FROM HIC204F1
B1 OUT
FROM HIC203F1
G1 OUT
FROM HIC202F1
R1 OUT
FROM HIC201F1
SYM OUT
TO IC201SF61
Y-OUT
RFOM JA702 'DYDY'
DYDY-IN
RFOM JA702 'SY'
S Y-IN
RFOM JA702 'SC'
S C-IN
S/W B+8V
RFOM JA701 #3
AV1 Y-IN
RFOM TU01S #1B
41N CVBS
RFOM JA701 #6
AV2 Y-IN
TO IC201S #62
AV2 Y-OUT
TO IC201S #64
P1P CVBS
IC201S #59
41N CVBS
FROM VIDEO S/W#10
JA701 #3
AV1 Y-IN
FROM VIDEO S/W#13
AV2 Y-IN
FROM VIDEO S/W#1
Y-IN
FROM VIDEO S/W#4
JA702 'SC'
S C-IN
TO HIC401F4
H-Drive
FROM JA701F37
P1P F/B
FROM JA701F36
P1P B
FROM JA701F35
P1P G
FROM JA701F34
P1P R
FROM PIP1F9
P1P F/B
FROM PIP1F10
P1P B
FROM PIP1F11
P1P G
FROM PIP1F12
P1P R
FROM HIC204F1
B1 OUT
FROM HIC203F1
G1 OUT
FROM HIC202F1
R1 OUT
FROM HIC201F1
SYM OUT
8Y
4.5V
MAIN SCL
MAIN SDA
FROM Q401
H-sync
FROM IC301F7
V-sync
TO IC201SF44
P1P F/B
TO IC201SF43
P1P B
TO IC201SF42
P1P G
TO IC201SF41
P1P R
FROM IC901F40
OSD R
FROM IC901F39
OSD G
FROM IC901F38
OSD B
FROM Q905
OSD F/B
FROM TU01SF1B
SUB CVBS
FROM VIDEO S/W#6
P1P CVBS
FROM HIC204F5
CRT B
FROM HIC203F5
CRT G
FROM HIC202F5
CRT R
TO IC201SF28
SENSE
S/W B+8V
FROM Q905
OSD F/B
FROM IC901F52
TILT
FROM HIC201F5
SYM
TP22
TP16
TP23
TP17
TP24
TP18
TP19
TP20
TP21

10-4 MAIN 4

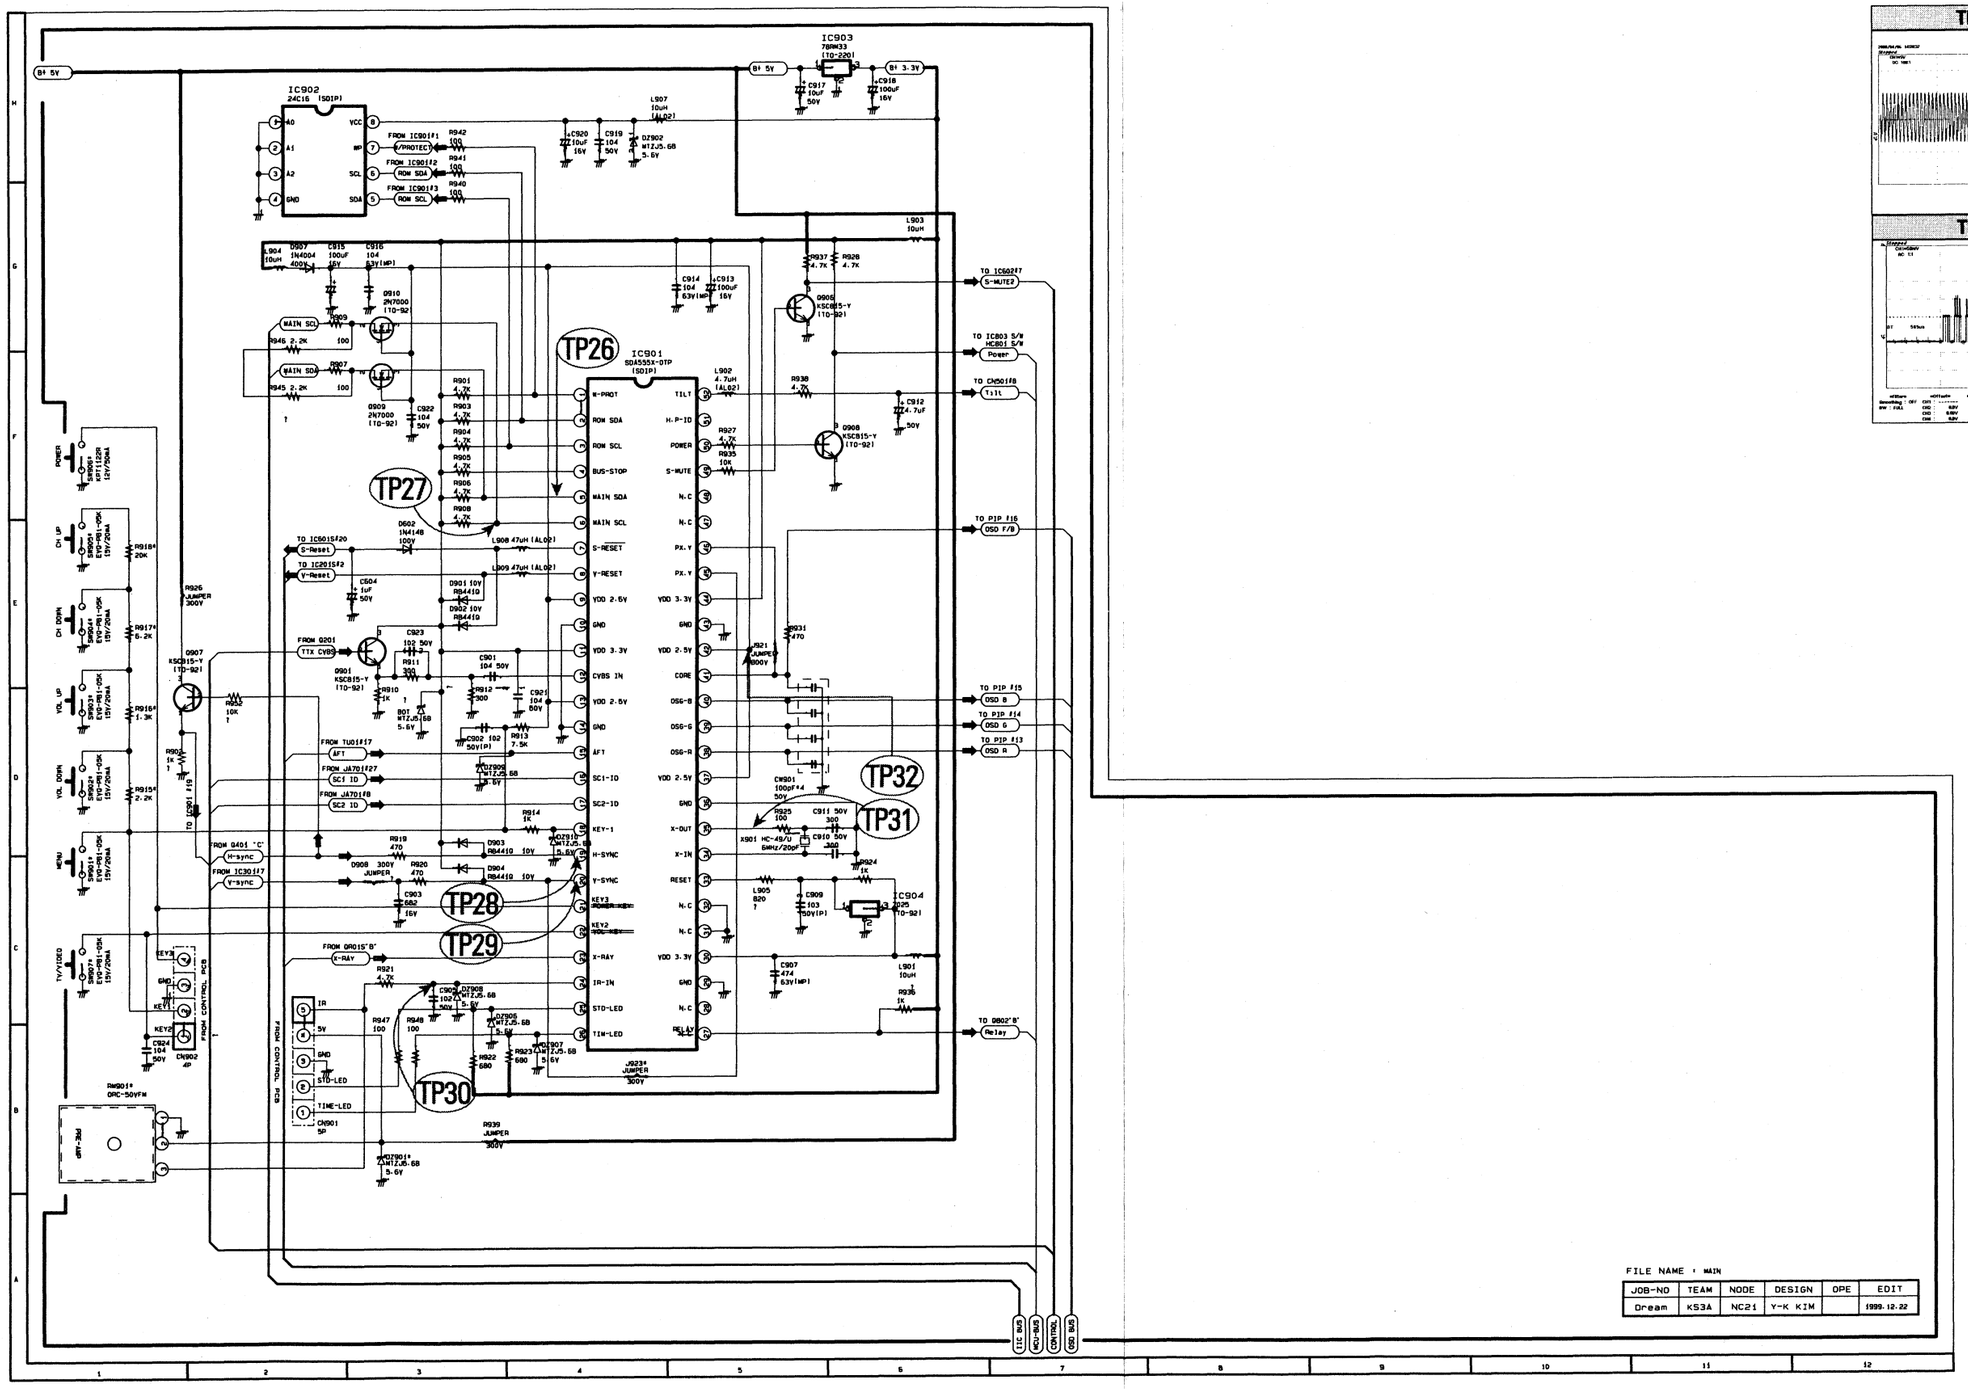
IC903
78RM33
(TO-220)
B+ 5V
B+ 3.3V
IC902
24C16 (SOIP)
IC901
SDA555X-DTP
(SDIP)
TP26
TP27
TP28
TP29
TP30
TP31
TP32
MAIN SCL
MAIN SDA
R-PROT
ROM SDA
ROM SCL
BUS-STOP
MAIN SDA
MAIN SCL
S-RESET
Y-RESET
YDD 2.6V
GND
YDD 3.3V
CYBS IN
YDD 2.5V
AFT
SC1-ID
SC2-ID
KEY-1
H-SYNC
Y-SYNC
KEY3
KEY2
X-RAY
IR-IN
STD-LED
TIM-LED
TILT
H.P-ID
POWER
S-MUTE
N.C
PX.Y
YDD 3.3V
GND
YDD 2.5V
CORE
OSG-B
OSG-G
OSG-R
YDD 2.5V
GND
X-OUT
X-IN
RESET
N.C
N.C
YDD 3.3V
GND
N.C
RELAY
TO IC60227 S-MUTE2
TO IC803 S/W HCB01 S/W Power
TO GND1F8 Tilt
TO PIP F16 OSD F/B
TO PIP F15 OSD B
TO PIP F14 OSD G
TO PIP F13 OSD R
TO Q802' B' Relay
FROM Q201 TTX CVBS
FROM TU01F17 AFT
FROM JA701F27 SC1 ID
FROM JA701F8 SC2 ID
FROM Q401 'C' H-sync
FROM IC301F17 V-sync
FROM Q801 'B' X-RAY
FROM CONTROL PCB
TO CONTROL PCB
IR
5V
GND
STD-LED
TIME-LED
CH UP
CH DOWN
VOL UP
VOL DOWN
MENU
TV/VIDEO
POWER
I2C BUS
MCU-BUS
CONTROL
OSD BUS
FILE NAME : MAIN
JOB-NO | TEAM | NODE | DESIGN | OPE | EDIT
Dream | KS3A | NC21 | Y-K KIM | | 1999.12.22

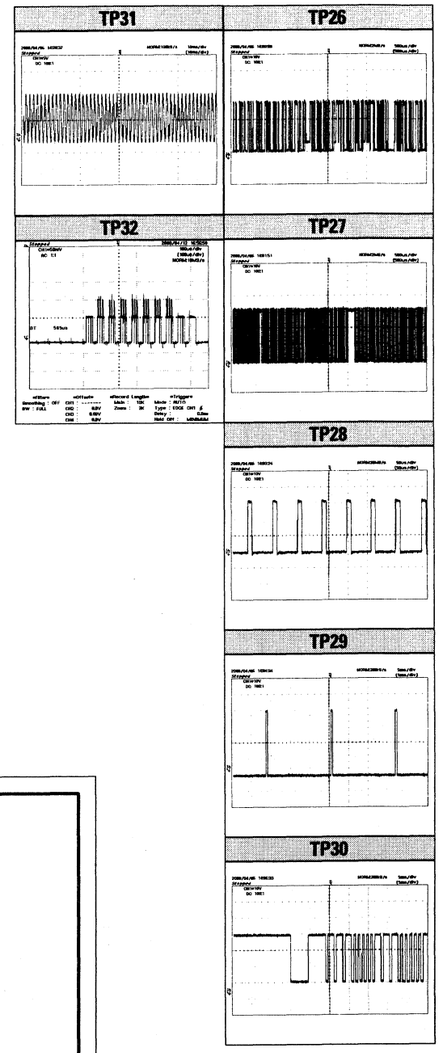
TP31
TP26
TP32
TP27
TP28
TP29
TP30

10-5 PIP MODULE, SWITCH MODULE

PIP MODULE

KS2A/KS3A ASSY-PIP MODULE

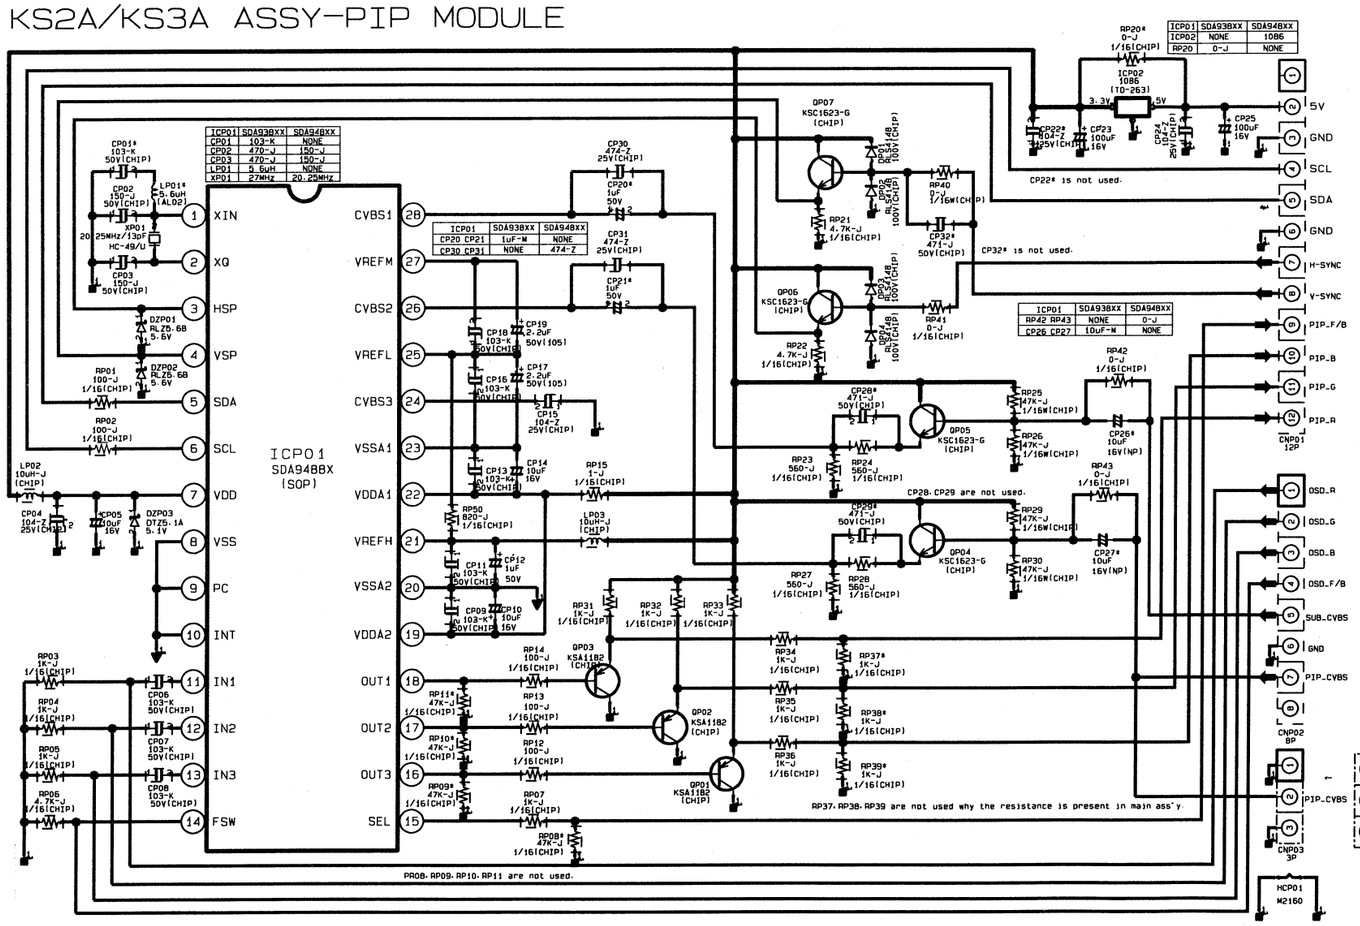

SWITCH MODULE

KS2A/KS3A VIDEO S/W MODULE (TEA6425)

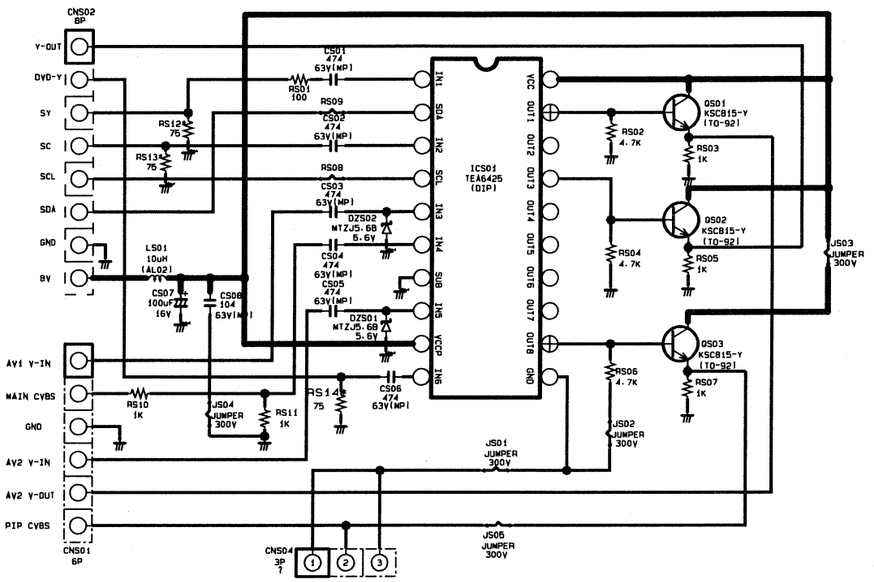

10-6 CRT

wtih in V/M

CHASSIS : KS3A
MODEL : 50Hz
CRT SCHEMATIC DIAGRAM

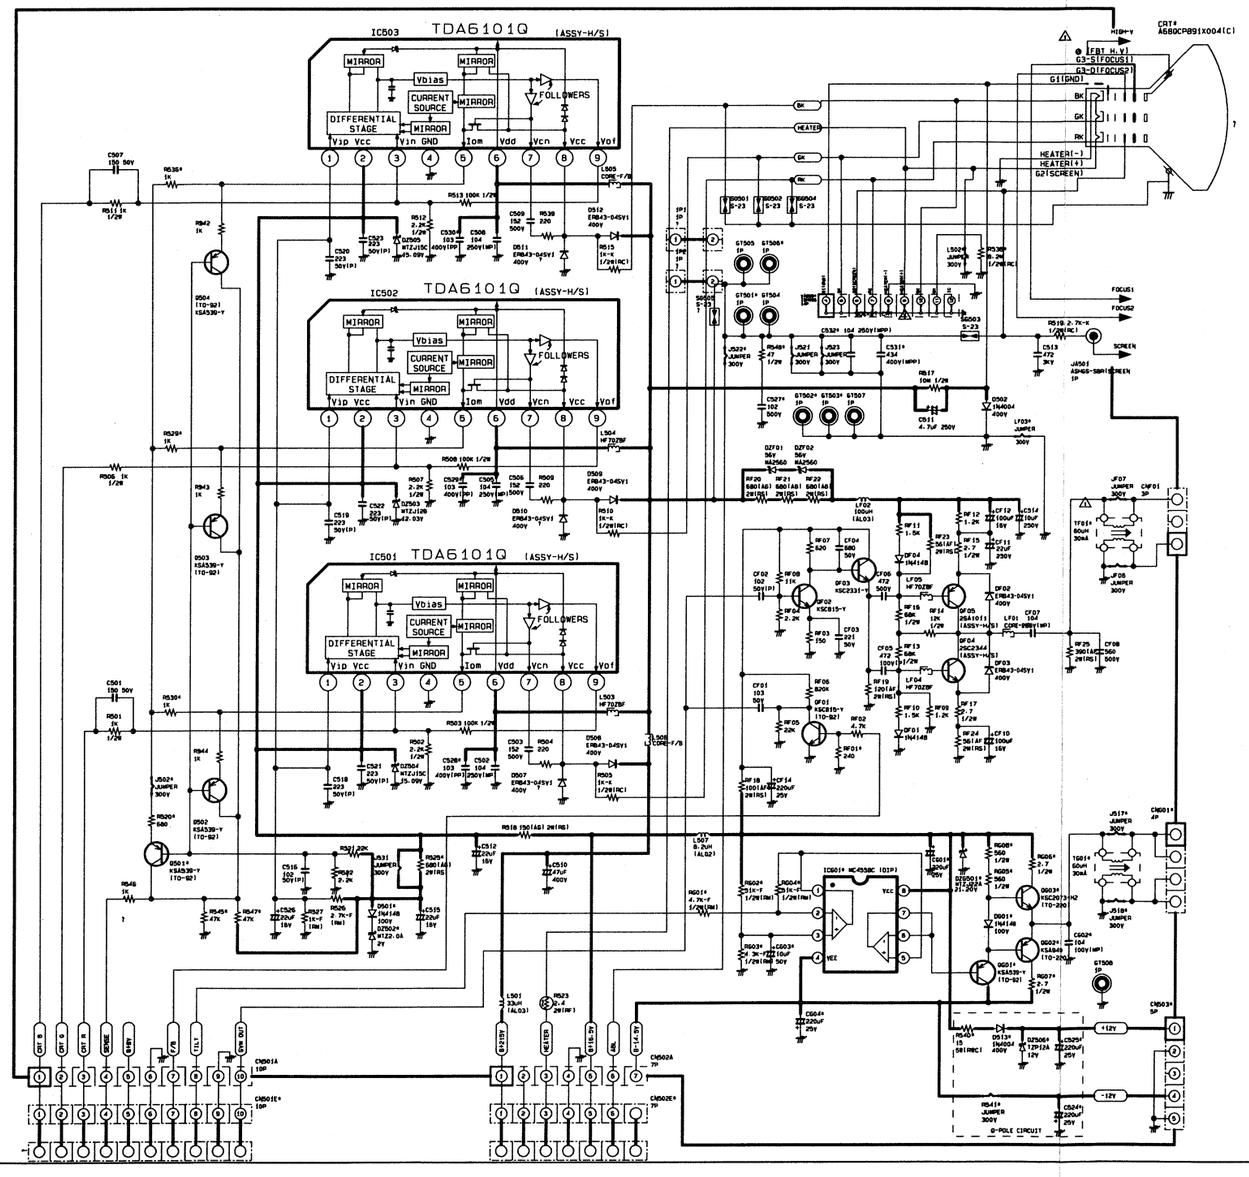

wtih out V/M

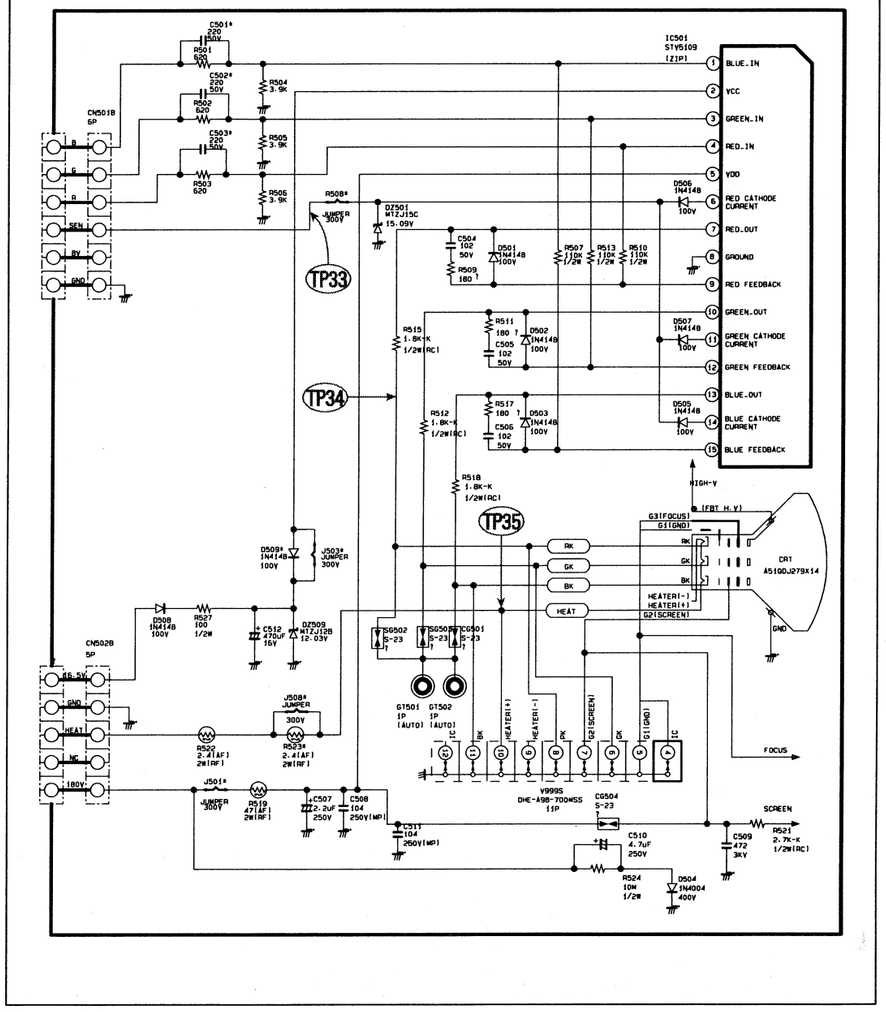

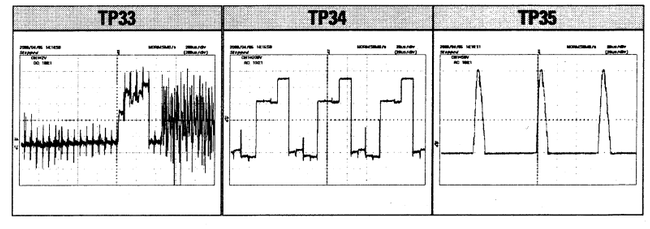

10-7 SIDE AV, DOUBLE FOCUS

SIDE AV

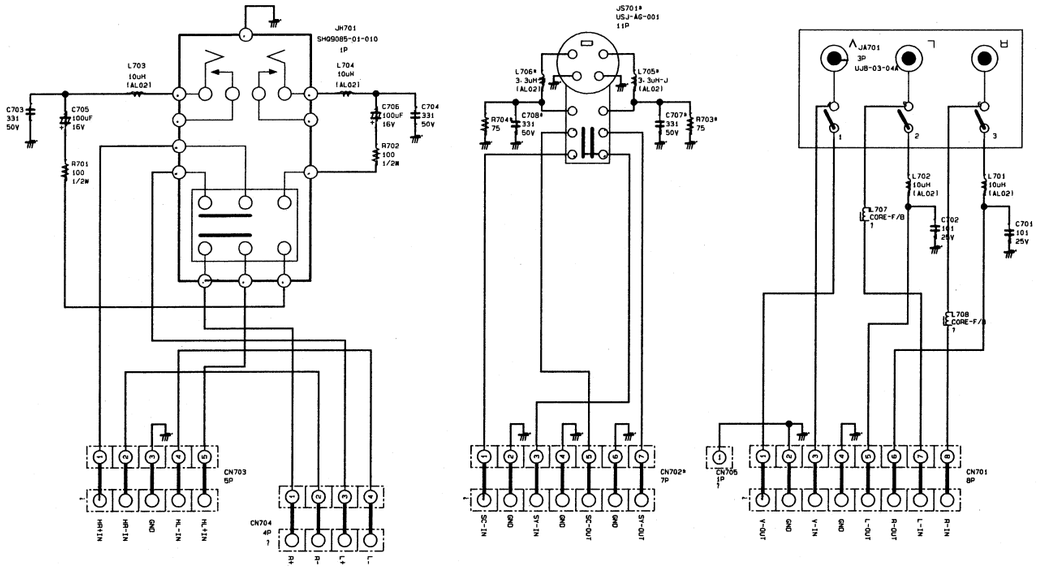

DOUBLE FOCUS

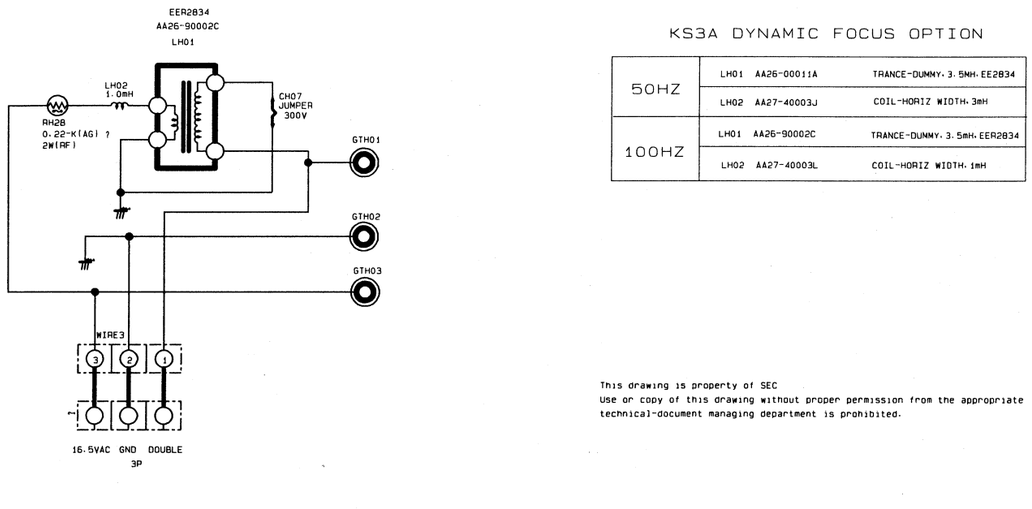

KS3A DYNAMIC FOCUS OPTION

50HZ	LH01 AA26-00011A	TRANCE-DUMMY, 3.5MH, EE2834
	LH02 AA27-40003J	COIL-HORIZ WIDTH, 3mH
100HZ	LH01 AA26-90002C	TRANCE-DUMMY, 3.5mH, EER2834
	LH02 AA27-40003L	COIL-HORIZ WIDTH, 1mH

This drawing is property of SEC
Use or copy of this drawing without proper permission from the appropriate technical-document managing department is prohibited.

10-8 WOOFER

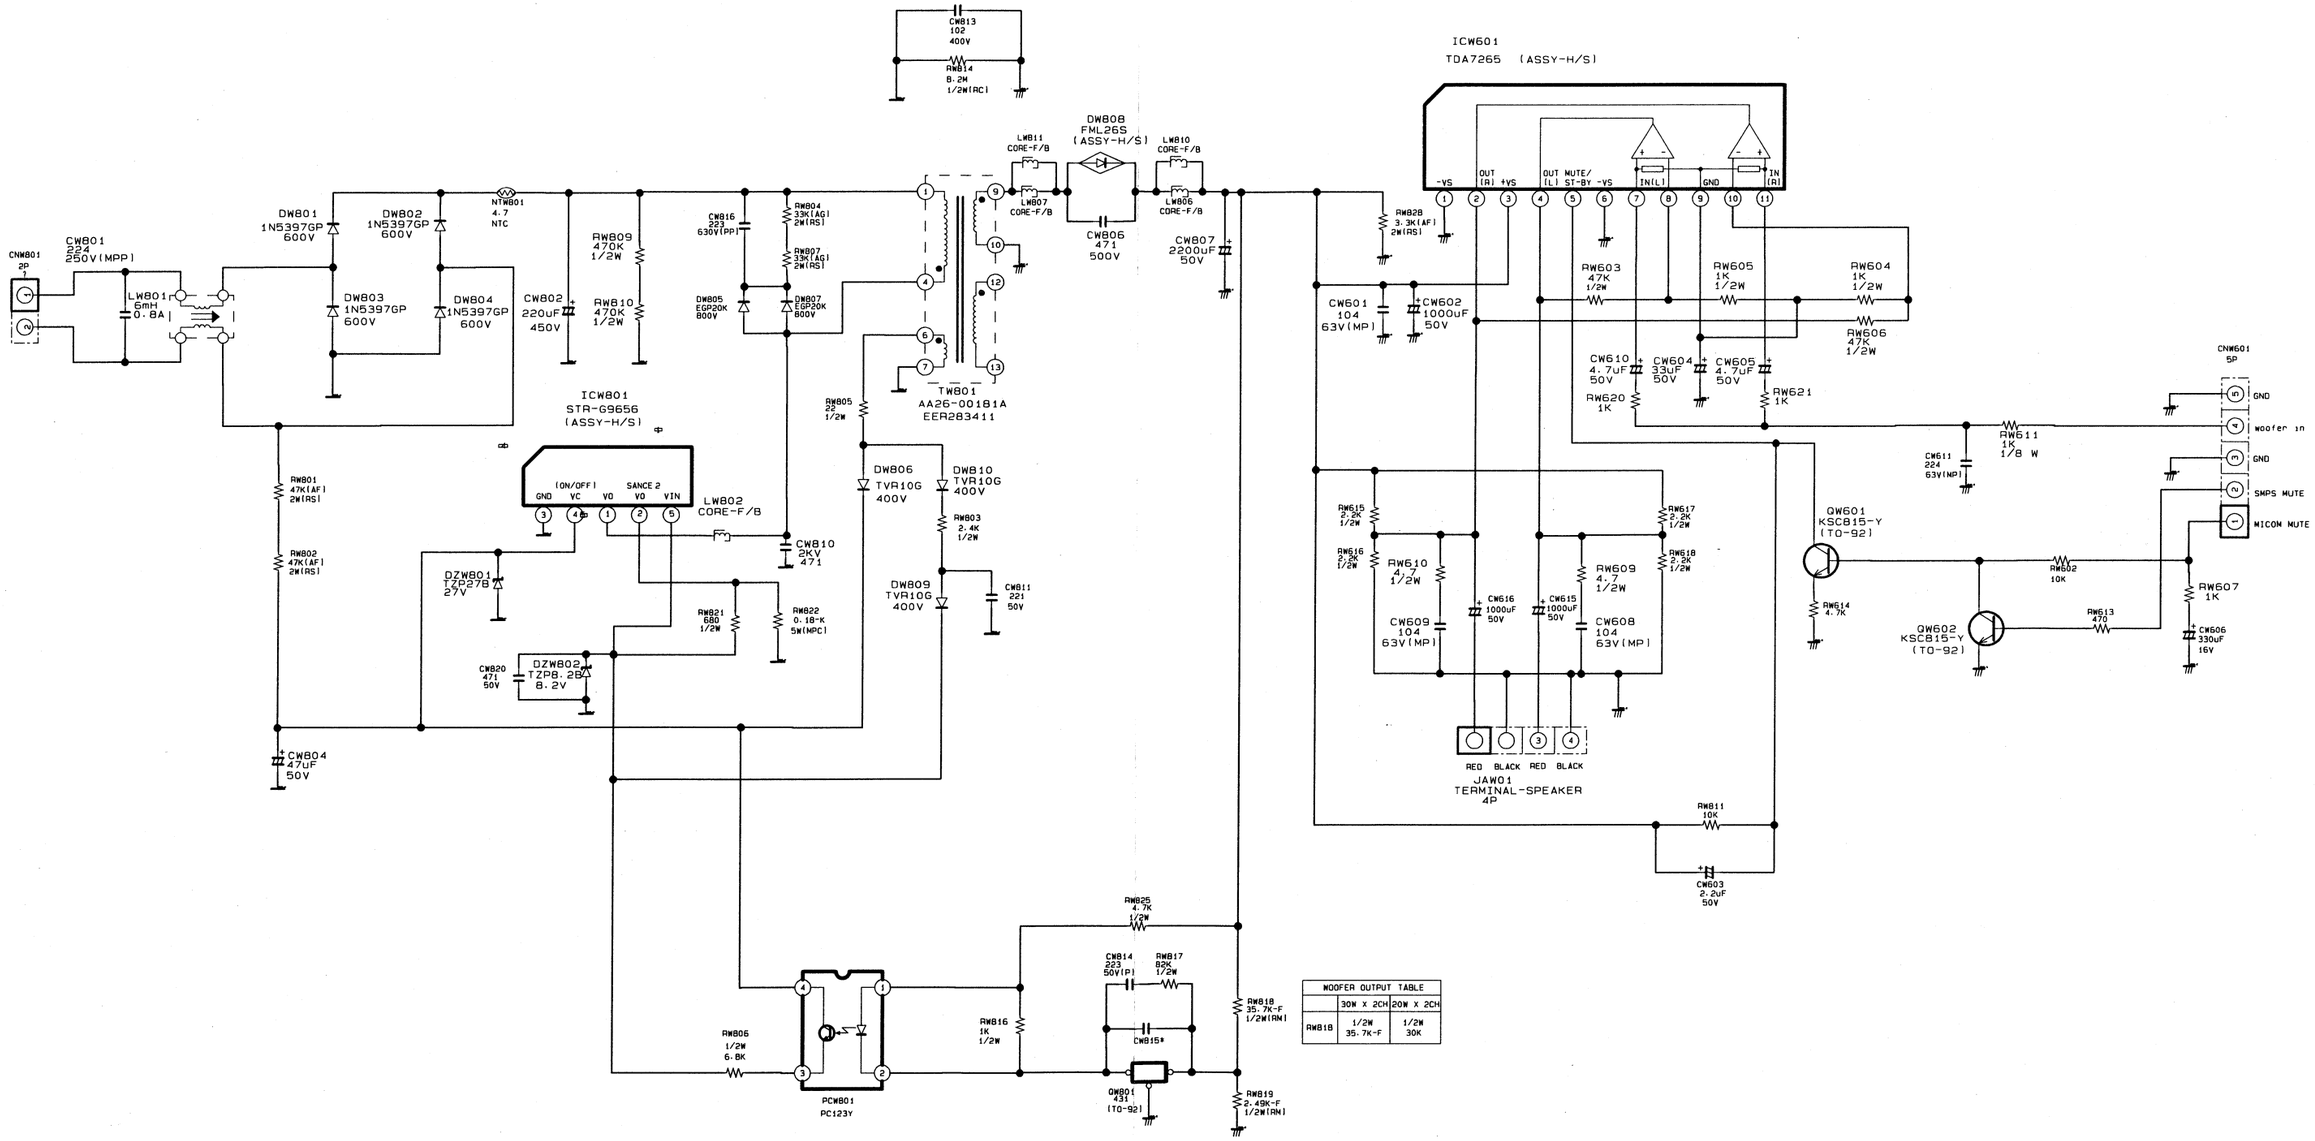

WOOFER OUTPUT TABLE		
	30W X 2CH	20W X 2CH
RW818	1/2W 35.7K-F	1/2W 30K